


Applications

- energy-saving lamps
- fluorescent lamp electronic ballasts
- other switches and oscillating circuits

Package: TO-92/ SOT-89/TO-126/TO-251/252

Maximum Ratings (Ta = 25°)

Parameter	Symbol	Rating	Unit
Collector-base voltage	BV_{CBO}	700	V
Collector-emitter voltage	BV_{CEO}	480	V
Emitter-base voltage	BV_{EBO}	9	V
Collector current	I_{CM}	1.5	A
Collector Power Dissipation	P_C	TO-92	1
		SOT-89	0.8
		TO-126	1.25
		TO-251/252	1.5
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55~+150	°C

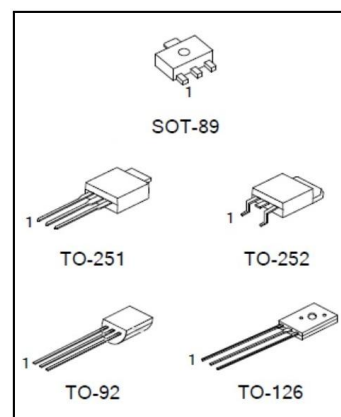

Pin Assignment			
Package	1	2	3
TO-92	E	C	B
SOT-89	B	C	E
TO-126	B	C	E
TO-251/252	B	C	E

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	BV_{CBO}	$I_C=0.1mA, I_E=0$	700			V
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C=1mA, I_B=0$	480			V
Emitter-Base Breakdown Voltage	BV_{EBO}	$I_E=0.1mA, I_C=0$	9			V
collector-base cut-off current	I_{CBO}	$V_{CB}=670V, I_E=0$			1	μA
collector-emitter cut-off current	I_{CEO}	$V_{CE}=450V, I_B=0$			10	μA
emitter-base cut-off current	I_{EBO}	$V_{EB}=9V, I_C=0$			1	μA
DC current gain	H_{FE}	$V_{CE}=5V, I_C=200mA$	15		30	
collector-emitter saturation voltage	$V_{CE(SAT)}$	$I_C=1A, I_B=200mA$			0.5	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=1A, I_B=200mA$			1.2	V
Storage Time	T_S	$I_C=250mA$	2			μs
Transition frequency	f_T	$V_{CE}=10V, I_C=100mA$	5			MHz

Classification of H_{FE}

Rank	B	C	D
Range	15-20	20-25	25-30