


# SPECIFICATION FOR APPROVAL

REF. :

|               |                 |               |            |                  |   |
|---------------|-----------------|---------------|------------|------------------|---|
| PROD.<br>NAME | SMD Line Filter | ABC'S DWG NO. |            | SF0903□□□□2□-□□□ |   |
|               |                 | REV.          | 20241206-F | PAGE             | 1 |


## I . Configuration and dimensions :

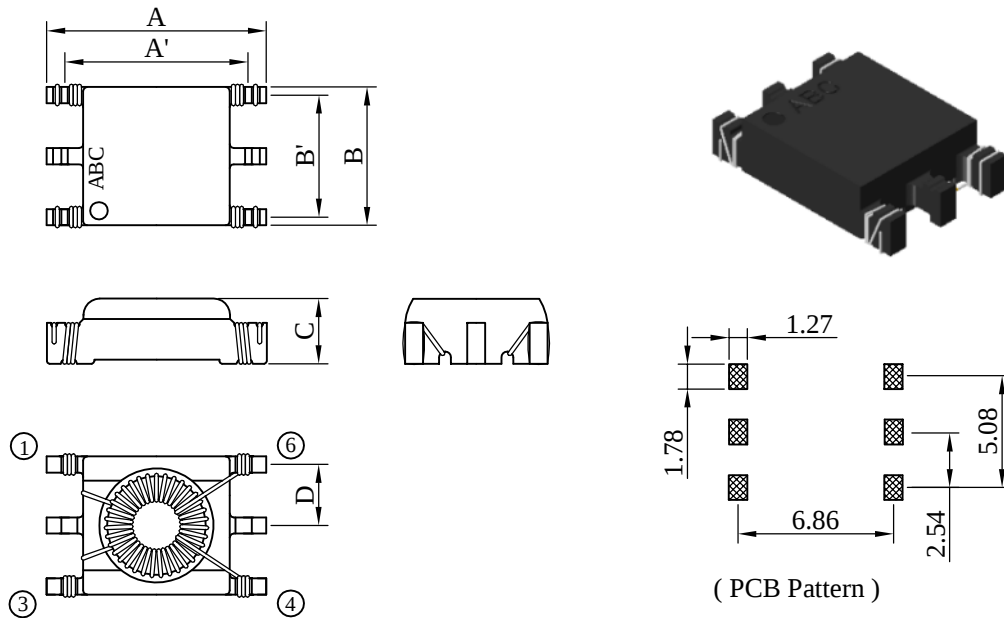

Unit : mm

| A         | A'        | B         | B'        | C         | D         |
|-----------|-----------|-----------|-----------|-----------|-----------|
| 9.20 max. | 7.24 typ. | 6.60 max. | 5.08 typ. | 2.50 max. | 2.54 typ. |

## II . Schematic diagram :

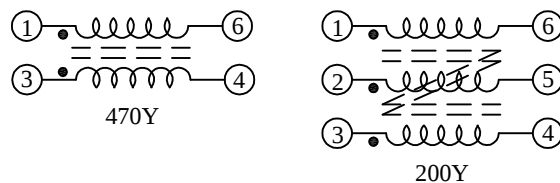


## III . Description :

- a . Ferrite toroidal core construction
- b . Enamelled copper wire : H class
- c . Product weight : 0.20g ( ref. )
- d . Moisture sensitivity Level 1
- e . Products comply with RoHS' requirements
- f . Halogen free

## IV . General specification :

- a . Operating temp. : -40°C----+105°C  
(Temp. rise included)
- b . Resistance to solder heat : 260°C.10 sec.

Peak temp. : 260°C max.  
Max. peak temp. - 5°C : 30sec. max.  
Max. time above 217°C : 60sec~150sec. max.

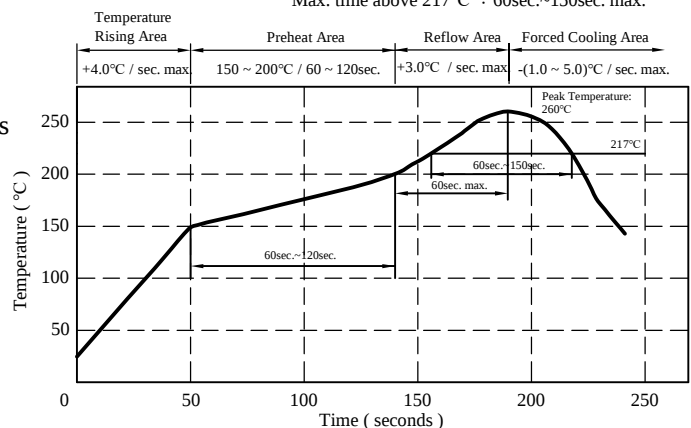

AR-001C

# SPECIFICATION FOR APPROVAL

REF. :

|       |                 |               |                  |      |   |
|-------|-----------------|---------------|------------------|------|---|
| PROD. | SMD Line Filter | ABC'S DWG NO. | SF0903□□□□2□-□□□ |      |   |
| NAME  |                 | REV.          | 20241206-F       | PAGE | 2 |


## V . Electrical characteristics :

| DWG. No.         | L ( $\mu$ H )<br>100k/0.1V | LL ( $\mu$ H )<br>100k/0.02V | C ( pF )<br>100k/0.02V | RDC<br>( $\Omega$ )<br>max. | Turns<br>Ratio | Insertion Loss |                  | Impedance ( z ) |                  | IDC<br>( A )<br>max. |
|------------------|----------------------------|------------------------------|------------------------|-----------------------------|----------------|----------------|------------------|-----------------|------------------|----------------------|
|                  |                            |                              |                        |                             |                | Freq. range    | dB               | Freq. range     | min ( $\Omega$ ) |                      |
| SF0903470Y2B-□□□ | 47.0 min.                  | 0.18 <sup>+0</sup>           | 20 <sup>+0</sup>       | 0.4                         | 1:1            | 1~100 MHz      | 20 <sup>-0</sup> | 10~30 MHz       | 1000             | 0.45                 |
| SF0903200Y2B-□□□ | 20.0 min.                  | 0.10 <sup>+0</sup>           | 18 <sup>+0</sup>       | 0.4                         | 1:1:1          | 30~300 MHz     | 20 <sup>-0</sup> | 30~100 MHz      | 800              | 0.50                 |


- 1). Electrical specifications at 25°C
- 2). Hi-Pot test ( N-N ) : 500Vac / 60Hz , 1mA , 1min.
- 3). IDC base on temp. rise 40°C max.

## VI . IDC Curve :

SF0903470Y2B

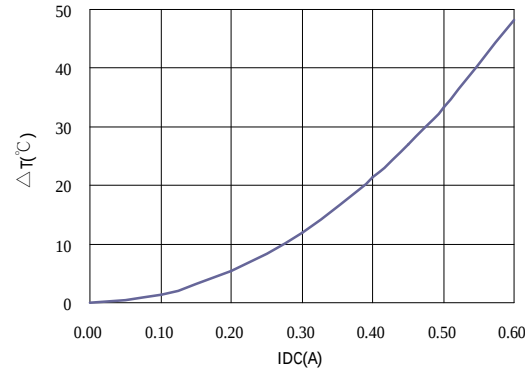

SF0903200Y2B


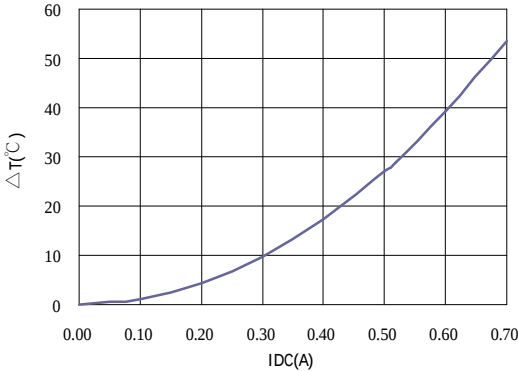


# SPECIFICATION FOR APPROVAL

REF. :



|               |                 |               |                  |      |   |
|---------------|-----------------|---------------|------------------|------|---|
| PROD.<br>NAME | SMD Line Filter | ABC'S DWG NO. | SF0903□□□□2□-□□□ |      |   |
|               |                 | REV.          | 20241206-F       | PAGE | 3 |

## VII . Impedance VS Frequency :

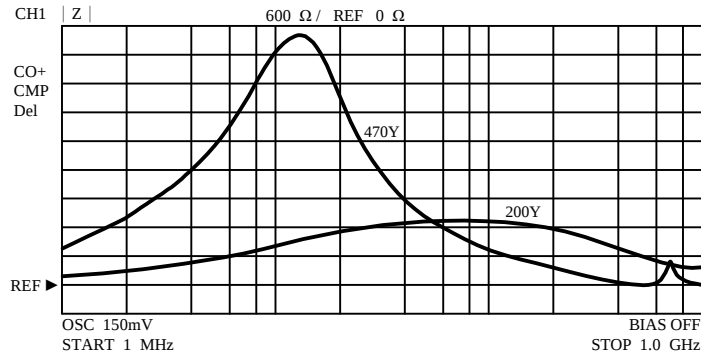

Test instrument :  
RF Impedance Analyzer HP4291A

## VIII . Insertion Loss Curve :

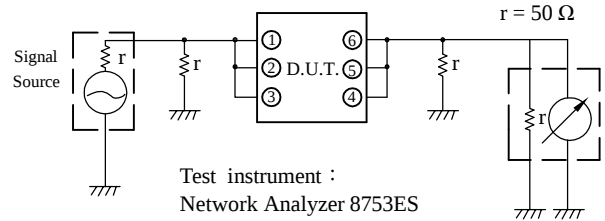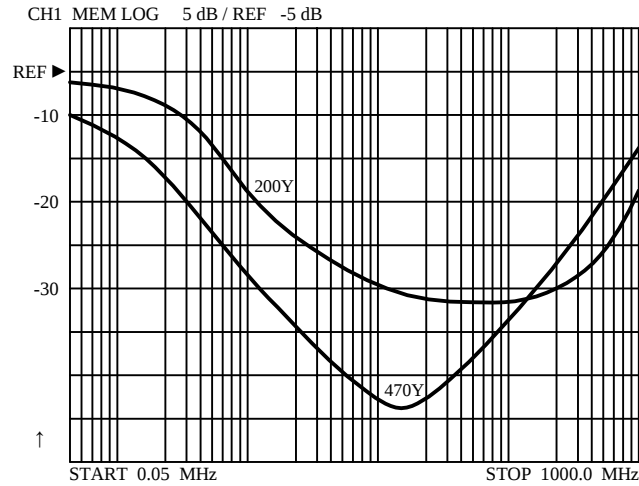

Test instrument :  
Network Analyzer 8753ES

AR-001C



# SPECIFICATION FOR APPROVAL

REF. :

|            |                 |               |                  |      |   |
|------------|-----------------|---------------|------------------|------|---|
| PROD. NAME | SMD Line Filter | ABC'S DWG NO. | SF0903□□□□2□-□□□ |      |   |
|            |                 | REV.          | 20241206-F       | PAGE | 4 |

## IX . Packaging information :

### ( 1 ) Configuration

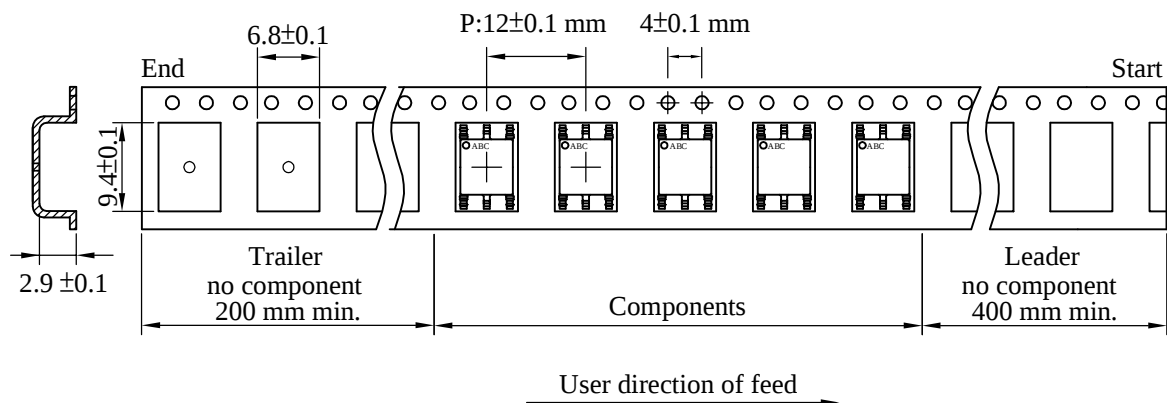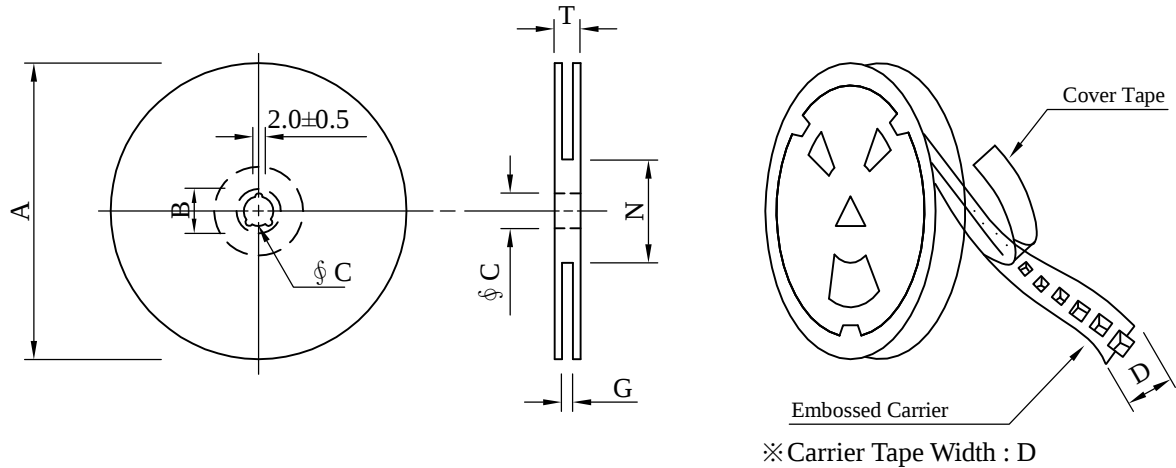

### ( 2 ) Dimensions (EIA-481 Standard)

Unit:mm

| Style   | A   | B            | C                  | D  | G         | N         | T           |
|---------|-----|--------------|--------------------|----|-----------|-----------|-------------|
| 13 - 16 | 330 | $21 \pm 0.8$ | $13^{+0.5}_{-0.2}$ | 16 | $18^{+0}$ | $50^{-0}$ | $22.4^{-0}$ |

### ( 3 ) Q'TY & G.W. Per package

| Code | Inner : Reel |          |         | Outer : Carton |           |              |
|------|--------------|----------|---------|----------------|-----------|--------------|
|      | Q'TY (pcs)   | G.W. (g) | Style   | Q'TY (pcs)     | G.W. (kg) | Size (cm)    |
| B    | 1,500        | 610      | 13 - 16 | 9,000          | 5.5       | 38 x 37 x 22 |


AR-001C

# SPECIFICATION FOR APPROVAL

REF. :

|               |                 |               |            |                  |      |   |
|---------------|-----------------|---------------|------------|------------------|------|---|
| PROD.<br>NAME | SMD Line Filter | ABC'S DWG NO. |            | SF0903□□□□2□-□□□ |      |   |
|               |                 | REV.          | 20241206-F |                  | PAGE | 5 |

X . Drawing number expression :

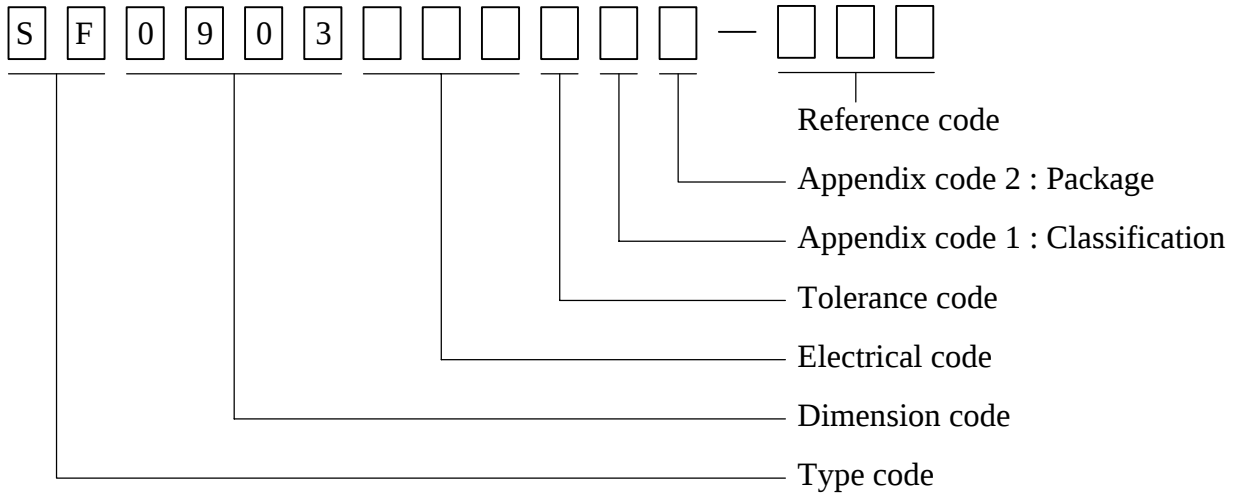

## Appendix code 1 : Product Classification

## Appendix code 2 : Package Information

| Code | Inner package       | Cover tape | Carrier tape | Bag        | Package Q'TY | Remark |
|------|---------------------|------------|--------------|------------|--------------|--------|
| B    | T /R (Reel package) | UCT        | Antistatic   | Antistatic | 1,500 pcs    |        |

AR-001C

# SPECIFICATION FOR APPROVAL

REF. :

|       |                 |               |                  |      |   |
|-------|-----------------|---------------|------------------|------|---|
| PROD. | SMD Line Filter | ABC'S DWG NO. | SF0903□□□□2□-□□□ |      |   |
| NAME  |                 | REV.          | 20241206-F       | PAGE | 6 |

**XI . Reliability test :**

| Item                                | Reference documents                    | Test Condition                                                                                                                                            | Test Specification                                                                                        |
|-------------------------------------|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| 1.High Temperature Exposure         | MIL-STD-202 Method 108                 | 1.Temperature: 125±2℃<br>2.Time:96±2 hours.                                                                                                               | 1.No mechanical or electrical damage.<br>2.Inductance shall not change more than ±50%.                    |
| 2.Temperature Cycling               | JESD22-A 104                           | 1.Temperature: -40℃ ~ +125℃<br>2.Number of cycle:100 cycles.<br>3.Dwell time:30 minutes                                                                   | 1.No mechanical or electrical damage.<br>2.Inductance shall not change more than ±50%.                    |
| 3.Biased Humidity Test              | MIL-STD-202 Method 103                 | 1.Temperature : 85±2 ℃<br>2.Humidity: 85% RH.<br>3.Time:96±2 Hours                                                                                        | 1.No mechanical or electrical damage.<br>2.Inductance shall not change more than ±50%.                    |
| 4.Operational Life                  | JESD22-A 108                           | 1.Temperature: 105℃(Temp. rise included)<br>2.Time:96±2 hours.<br>3.Rated current                                                                         | 1.No mechanical or electrical damage.<br>2.Inductance shall not change more than ±50%.                    |
| 5.External Visual                   | JESD22-B 101 & MIL-STD-883 Method 2009 | Inspect product constructions, marking and workmanship.                                                                                                   | 1.No pollution on the surface of products.<br>2.Clear marking.<br>3.No crack.                             |
| 6.Physical Dimensions               | JESD22-B 100                           | Verify physical dimensions to the applicable product detail specification.                                                                                | Per product specification standard                                                                        |
| 7.Resistance to solvents            | MIL-STD-202 Method 215                 | Immerse into solvent for 3±0.5 minutes & brush 10 times for 3 cycles.                                                                                     | 1.No body change in apperance.<br>2.No marking blurred.<br>3.Inductance shall not change more than ±50%.  |
| 8.Vibration Test                    | MIL-STD-202 Method 204                 | 1.Frequency and Amplitued :10-2000-10 Hz<br>2.Sweep time : 20 min<br>3.Acceleration : 5g<br>4.Direction : X , Y , Z<br>5.Number of sweep : 6 time/axis    | 1.No mechanical or electrical damage.<br>2.Inductance shall not change more than ±50%.                    |
| 9.Resistance To Soldering Heat Test | MIL-STD-202 Method 210 & J-STD020      | 1.Highest temperature : 260±5℃.<br>2.Time ( temp.≥ 217℃ ) : 60~150 Seconds.<br>3.Reflow times : 3 times.                                                  | 1.No mechanical or electrical damage.<br>2.Inductance shall not change more than ±50%.                    |
| 10.Over load                        | JIS C 6436 & User SPEC.                | 1.Applied one and half rated current for a period of 5 minutes.<br>2.Rated current                                                                        | No electrical or mechanical damage                                                                        |
| 11.Temperature Rise Current         | JIS C 6436 & User SPEC.                | 1.Applied rated current for 10 minutes.<br>2.Temperature measure by digital surface thermometer.<br>3.Irms current                                        | Surface temperature rise is less than 40℃ max                                                             |
| 12.Solderability Test               | J-STD-002 & JESD22-B 102               | 1.Baking in pre-testing : 150±5℃ / 16Hours±30 min.<br>2.Peak temperature : 240±5℃<br>3.Time ( temp.≥217℃ ) : 60~150 seconds.<br>4.Reflow times : 1 times. | More than 95% soldering coverage min on terminations.                                                     |
| 13.Electrical Characteriazation     | MIL-STD-202 Method 304 & User SPEC.    | 1.Operating temperature : -40℃~105℃<br>2.Room temperature : 25℃.                                                                                          | 1.No mechanical or electrical damage.<br>2.Inductance shall not change more than ±50%.                    |
| 14.Withstanding Voltage Test        | MIL-STD-202 Method 301 & User SPEC.    | 1.AC: 500 V (Winding to Winding)<br>2.Time : 1min.                                                                                                        | 1.During the test no breakdown.<br>2.No mechanical or electrical damage.                                  |
| 15.Drop                             | CNS-C6354 & GB/T 2423.8                | 1.Products shall be mounted on SPEC. PCB and dropped down from a height of 1m<br>2.Drop total time : 6 times (Every side of sample drop 2 times)          | 1. Adhesion on PCB shall be enough.<br>2. Product appearance shall not break.<br>3. No electrical damage. |
| 16.Terminal Strength Test           | IEC 60068-2-21                         | 1.Apply push force to samples mounted on PCB.<br>2.Force of 1.8 kg for 60±1 seconds.                                                                      | After test, inductors shall be no mechanical damage.                                                      |

AR-001C

# SPECIFICATION FOR APPROVAL

REF. :

|               |                 |               |                  |      |   |
|---------------|-----------------|---------------|------------------|------|---|
| PROD.<br>NAME | SMD Line Filter | ABC'S DWG NO. | SF0903□□□□2□-□□□ |      |   |
|               |                 | REV.          | 20241206-F       | PAGE | 7 |

## XII . Safety notes :

1. The risks of using the product are highly relevant to the field of application and need to be evaluated by both user and manufacturer. If the product is used for a purpose that directly affects personal safety or will cause significant impact or loss to the society , please be sure to contact us first for confirmation.  
產品使用的風險與應用領域有高度相關，若您應用於直接影響人身安全系統或對社會會造成重大影響與損失之相關用途，請務必優先與我們聯繫確認。
2. The storage period is less than 12 months. Ensure to follow the storage conditions (Temperature: 5 to 30°C, Humidity: 10 to 60% RH or less). If the storage time is exceeded the limit, the electrodes might be deteriorate of terminal soldering.  
儲存期不超過12個月,務必遵守儲存條件（溫度：5至30°C，濕度：10至60%RH以下）。如果超過了儲存時間，端子電極可能會氧化而影響焊接。
3. Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).  
不要在有氣體腐蝕等條件的地方使用或存放（鹽，酸，鹼等）。
4. Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.  
安裝時的焊接條件應在規格範圍內。如果超過要求，可能會發生短路，性能下降或壽命縮短。
5. When using, it should try to avoid excessive mechanical impact on the product, such as collision / drop ... and other reasons.  
使用時，應盡量避免產品受到過度機械衝擊，如碰撞/掉落...等原因。
6. When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.  
將已安裝新片的電路板組裝到裝置時，請注意應盡量避免電路板受到組裝變形...等，導致產品受到應力。
7. Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.  
產品會因通電而自我發熱(溫度上升)，因此在熱影響設計方面，需保留適當公差。
8. Do not expose the products to magnets or magnetic fields.  
請勿將產品暴露於磁鐵或是磁場中。
9. If you would like to use this products to performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property, or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.  
如果您希望將此產品用於性能和/或質量要求更嚴格的安全性或可靠性，或其失敗、故障或麻煩可能對社會、個人或財產造成嚴重損害，或者您有特殊情況要求超出目錄中規定的範圍或條件，請與我們聯繫。

AR-001C



千如電子集團  
ABC-ATEC ELECTRONICS GROUP