

**Features**

- Low power consumption
- Low temperature coefficient
- Built-in hysteresis characteristic
- High input voltage (up to 8V)
- Output voltage accuracy:
 $\pm 2\% @ V_{DET} \geq 2.5V$
 $\pm 50mV @ V_{DET} < 2.5V$
- SOT23, SOT23-3 and DFN1*1-4L package

Applications

- Battery checkers
- Level selectors
- Power failure detectors
- Microcomputer reset
- Battery memory backup
- Non-volatile RAM signal storage protectors

General Description

The Y61C series devices are a set of three terminal low power voltage detectors implemented in CMOS technology. Each voltage detector in the series detects a particular fixed voltage ranging from 0.9V to 5.0V. The voltage detectors consist of a high-precision and low power consumption standard voltage source as well as a comparator,

hysteresis circuit, and an output driver (CMOS inverter or NMOS open drain). CMOS technology ensures low power consumption.

Although designed primarily as fixed voltage detectors, these devices can be used with external components to detect user specified threshold voltages.

Selection Table

Part No.	Det. Voltage	Hys. Width	Output	Tolerance	Package
Y61CC0902MR	0.9V	5%	CMOS	$\pm 50mV$	SOT23 SOT23-3 DFN1*1
Y61CN0902MR	0.9V	5%	NMOS	$\pm 50mV$	
Y61CC1002MR	1.0V	5%	CMOS	$\pm 50mV$	
Y61CN1002MR	1.0V	5%	NMOS	$\pm 50mV$	
...	...	...	...	...	
Y61CC2402MR	2.4V	5%	CMOS	$\pm 50mV$	
Y61CN2402MR	2.4V	5%	NMOS	$\pm 50mV$	
Y61CC2502MR	2.5V	5%	CMOS	$\pm 2\%$	
Y61CN2502MR	2.5V	5%	NMOS	$\pm 2\%$	
...	...	...	...	$\pm 2\%$	
Y61CC5002MR	5.0V	5%	CMOS	$\pm 2\%$	
Y61CN5002MR	5.0V	5%	NMOS	$\pm 2\%$	


Order Information

Y61C ①②③④⑤⑥⑦


Designator	Symbol	Description
①	C	CMOS output
	N	NMOS output
②③	VOUT	Output Voltage(0.9~5.0V)
④⑤	02	Standard
⑥	N	Package: SOT23
	M	Package: SOT23-3
	FC	Package: DFN1*1-4L
⑦	R	RoHS / Pb Free
	G	Halogen Free

Block Diagram

(1) CMOS Output

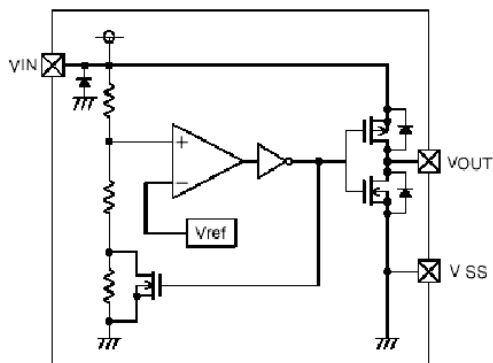


(2) N-ch Open Drain Output

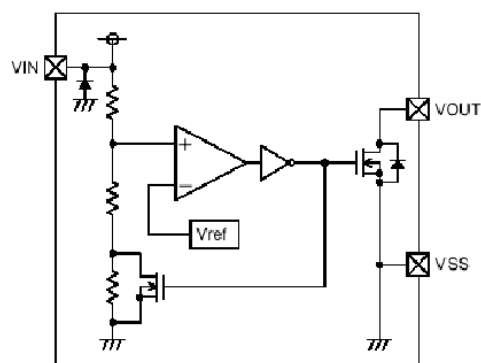

Output Table & Curve


V_{DD}	$V_{DD} > V_{DET}(+)$	$V_{DD} \leq V_{DET}(-)$
V_{OUT}	Hi-Z	V_{SS}

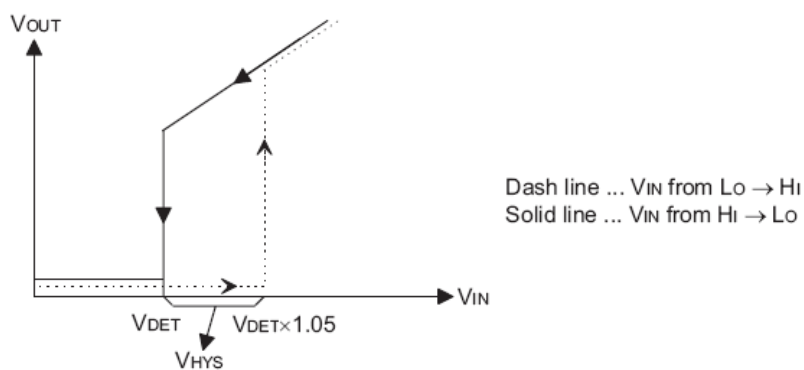

Pin Assignment

SOT23 and SOT23-3

(Top View)



DFN1*1-4L




Table1: Y61C series (SOT23 and SOT23-3 PKG)


PIN NO.	PIN NAME	FUNCTION
1	VOUT	Output voltage pin
2	GND	GND pin
3	VIN	Input voltage pin

Table2: Y61C series (DFN1*1-4PKG)


PIN NO	PIN NAME	FUNCTION
1	VOUT	Output
2	GND	Ground
3	NC	No connect
4	VIN	Input

Marking Rule

SOT23 and SOT23-3



DFN1*1-4L



① Represents integer of detect voltage

CMOS Output

MARK	CONFIGURATION	VOLTAGE (V)
A	CMOS	0.x
B	CMOS	1.x
C	CMOS	2.x
D	CMOS	3.x
E	CMOS	4.x
F	CMOS	5.x
H	CMOS	6.x

N-Channel Open Drain Output

MARK	CONFIGURATION	VOLTAGE (V)
K	N-ch	0.x
L	N-ch	1.x
M	N-ch	2.x
N	N-ch	3.x
P	N-ch	4.x
R	N-ch	5.x
S	N-ch	6.x

② Represents decimal number of detect voltage

MARK	VOLTAGE (V)	MARK	VOLTAGE (V)
0	×.0	5	×.5
1	×.1	6	×.6
2	×.2	7	×.7
3	×.3	8	×.8
4	×.4	9	×.9

③④ Represents production lot number



Absolute Maximum Ratings

Supply Voltage-0.3V to 8.5V Storage Temperature-50℃ to 125℃
 Operating Temperature-40℃ to 85℃

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Thermal Information

Symbol	Parameter	Package	Max.	Unit
θ_{JA}	Thermal Resistance (Junction to Ambient) (Assume no ambient airflow, no heat sink)	SOT23-3	500	℃/W
P_D	Power Dissipation	SOT23-3	0.20	W

Note: P_D is measured at $T_a = 25^\circ\text{C}$

Electrical Characteristics


$V_{DF}=0.8V\sim 5.0V$

$T_a=25^\circ\text{C}$


Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
V_{DET}	Detection Voltage	$V_{DF}=0.9V\sim 2.4V$		$V_{DET}-0.05$	V_{DET}	$V_{DET}+0.05$	V
		$V_{DF}=2.5V\sim 5.0V$		$V_{DET}*0.98$	V_{DET}	$V_{DET}*1.02$	V
V_{HYS}	Hysteresis Width	-		$0.02*V_{DET}$	$0.05*V_{DET}$	$0.10*V_{DET}$	V
I_{DD}	Operating Current	$V_{in}=1.5V$		-	0.7	2.3	μA
		$V_{in}=2.0V$		-	0.8	2.7	
		$V_{in}=3.0V$		-	0.9	3.0	
		$V_{in}=4.0V$		-	1.0	3.2	
		$V_{in}=5.0V$		-	1.1	3.6	
V_{DD}	Operating Voltage	-	-	0.7	-	8.5	V
T_{delay}	V_{in} from low to high	$V_{DET}=2.9V$		-	55	-	μs
T_{period}	V_{in} from high to low	$V_{DET}=2.9V$		-	0.5	-	μs
I_{OL}	Output Sink Current	2V	$V_{OUT}=0.2V$	0.5	1	-	mA
$\frac{\Delta V_{DET}}{V_{DF}\Delta T_a}$	Temperature Coefficient	-	-25℃ < T_a <125℃	-	± 100	-	ppm/℃

Typical Performance Characteristics


(1) Output Voltage vs Input voltage

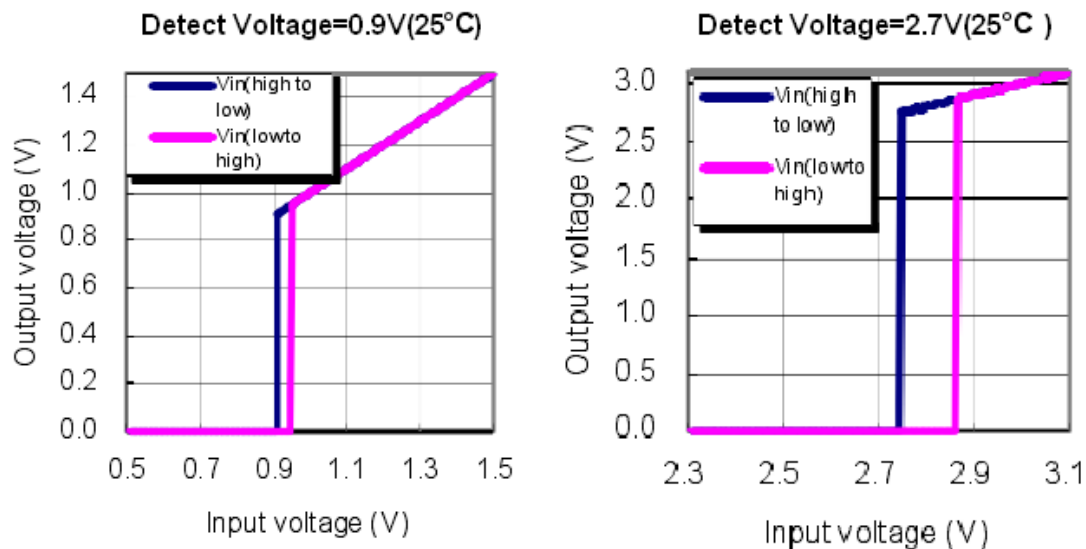


(2) Supply Current vs. Input Voltage

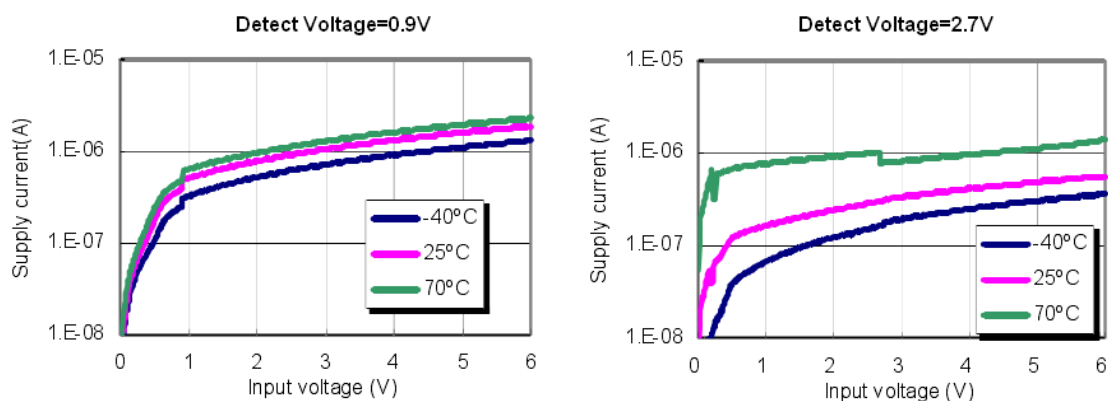

(3) Vin from 0 to 3.3V delay Tdelay=56us

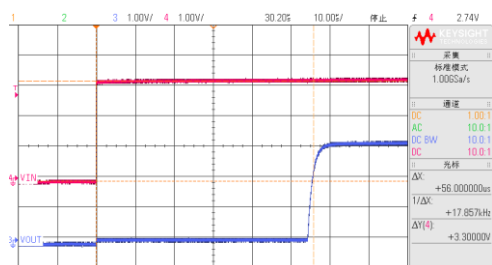


(4) Vin from 3.3V to 0V delay Tperiod=200ns

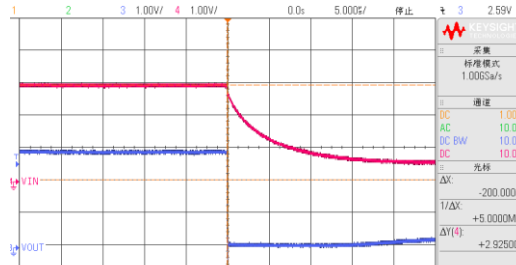

**Microcomputer Reset Circuit**


Normally a reset circuit is required to protect the microcomputer system from malfunctions due to power line interruptions. The following examples show how different output configurations perform a reset function in various systems.

NMOS open drain output application for separate power supply

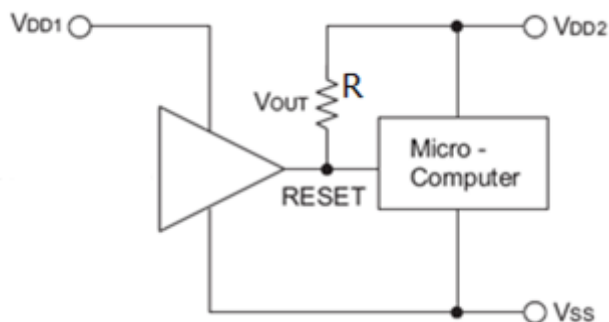


R=47K

CMOS output application

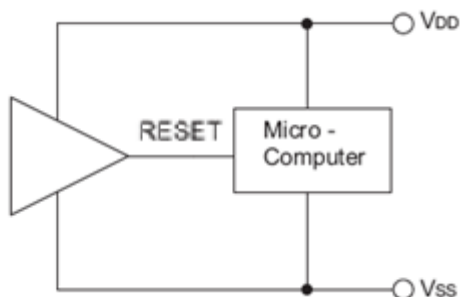


Package Information

3-pin SOT23-3 Outline Dimensions

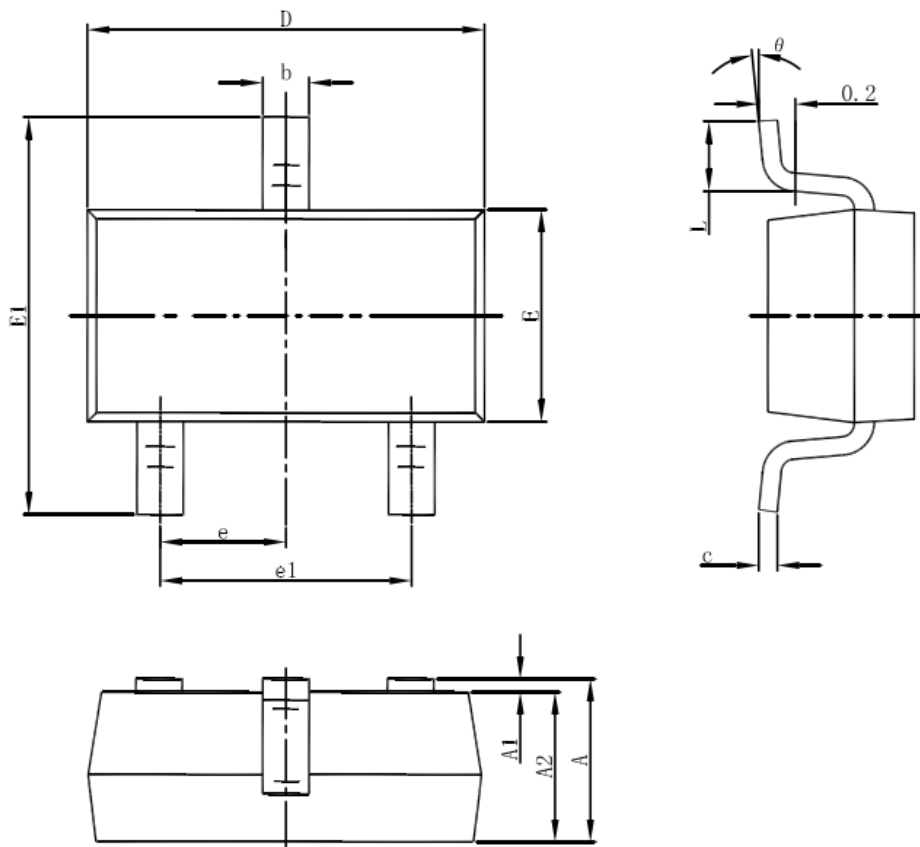


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

3-pin SOT23 Outline Dimensions

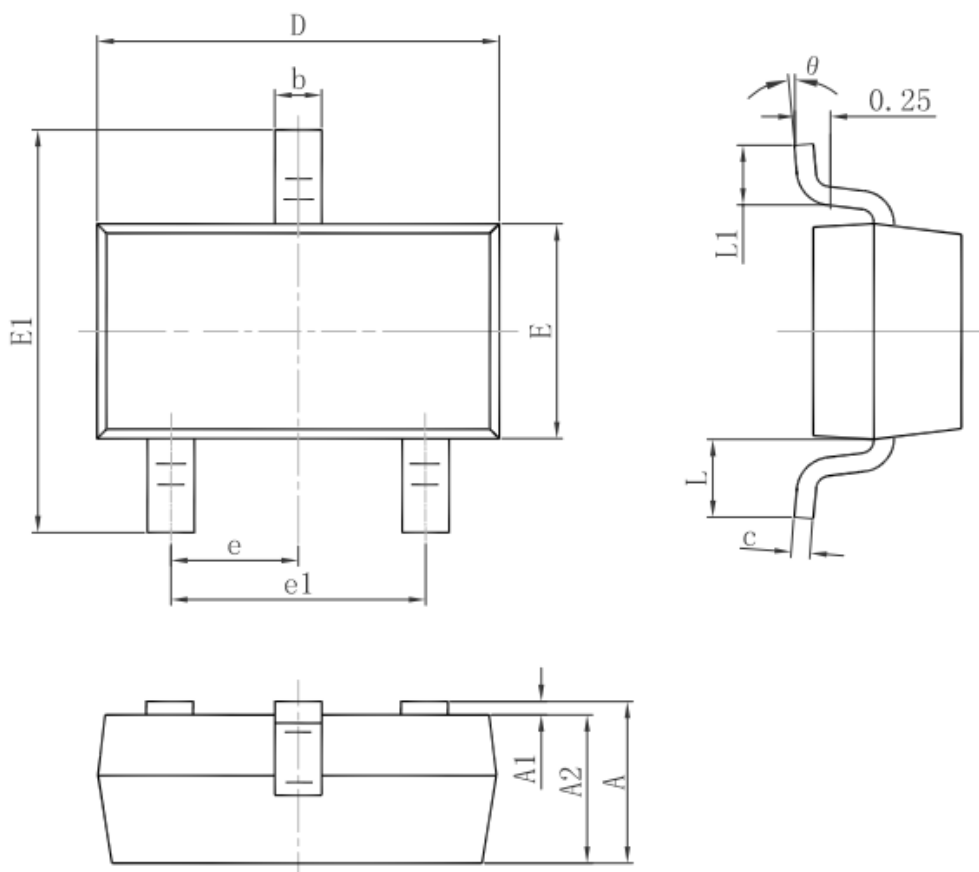

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

DFN1*1-4 Outline Dimensions

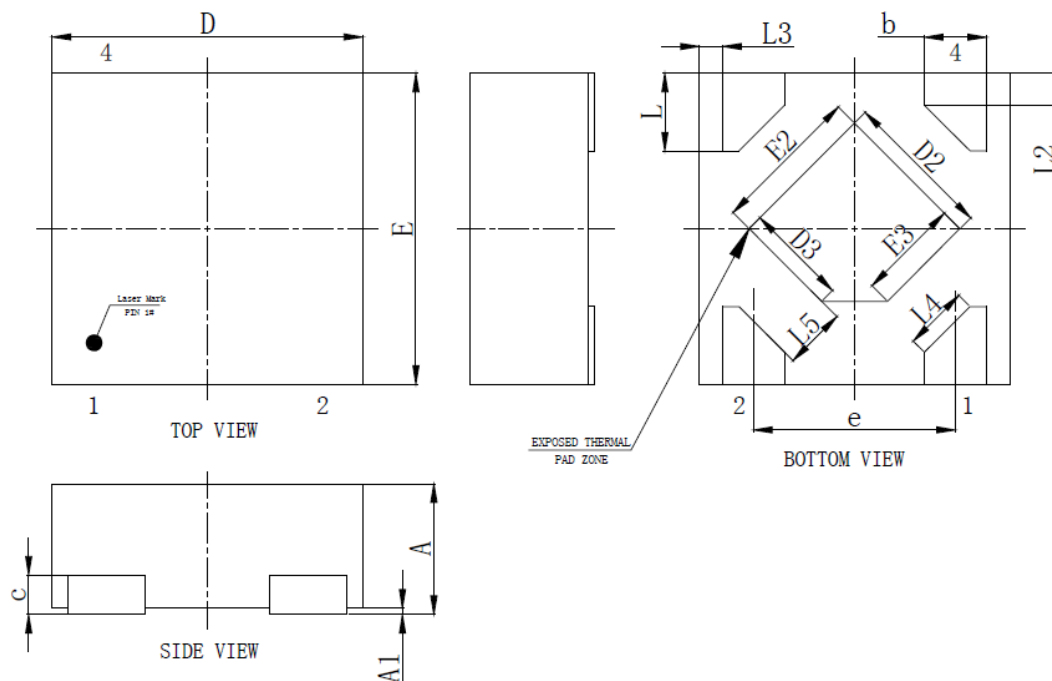

SYMBOL	MILLIMETER		
	MIN	MID	MAX
A	0.45	0.50	0.55
A1	0.00	0.02	0.05
b	0.15	0.20	0.25
c	0.127REF		
D	0.95	1.00	1.05
D2	0.38	0.48	0.58
D3	0.23	0.33	0.43
e	0.65BSC		
E	0.95	1.00	1.05
E2	0.38	0.48	0.58
E3	0.23	0.33	0.43
L	0.20	0.25	0.30
L2	0.103REF		
L3	0.075REF		
L4	0.208REF		
L5	0.200REF		