


FEATURES


- Complementary to MMBT5401
- Ideal for Medium Power Amplification and Switching



1.BASE
2.EMITTER
3.COLLECTOR

Marking

Type number	Marking code
2N5551	G1

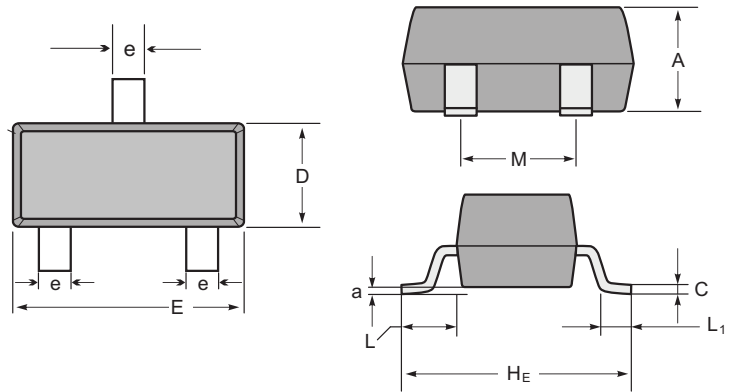

SOT-23 mechanical data

UNIT		A	C	D	E	H _E	e	M	L	L ₁	a
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector–Base Voltage	V_{CBO}	180	V
Collector–Emitter Voltage	V_{CEO}	160	V
Emitter–Base Voltage	V_{EBO}	6	V
Collector Current — Continuous	I_C	600	mA
Collector Power Dissipation	P_C	300	mW
Thermal Resistance From Junction To Ambient	R_{thJA}	416	°C/W
Operation Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	°C

2N5551

CLASSIFICATION OF h_{FE}

Rank	L	H
Range	100-200	200-300

ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted.)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}$, $I_E = 0$	180			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 1\text{ mA}$, $I_B = 0$	160			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu\text{A}$, $I_C = 0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB} = 120\text{V}$, $I_E = 0$			50	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 4\text{V}$, $I_C = 0$			50	nA
DC current gain	h_{FE1}	$V_{CE} = 5\text{V}$, $I_C = 1\text{mA}$	80			
	h_{FE2}	$V_{CE} = 5\text{V}$, $I_C = 10\text{mA}$	100		300	
	h_{FE3}	$V_{CE} = 5\text{V}$, $I_C = 50\text{mA}$	50			
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C = 10\text{mA}$, $I_B = 1\text{mA}$			0.15	V
	$V_{CE(sat)2}$	$I_C = 50\text{mA}$, $I_B = 5\text{mA}$			0.2	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C = 10\text{mA}$, $I_B = 1\text{mA}$			1	V
	$V_{BE(sat)2}$	$I_C = 50\text{mA}$, $I_B = 5\text{mA}$			1	V
Transition frequency	f_T	$V_{CE} = 10\text{V}$, $I_C = 10\text{mA}$, $f = 100\text{MHz}$	100		300	MHz
Collector output capacitance	C_{ob}	$V_{CB} = 10\text{V}$, $I_E = 0$, $f = 1\text{MHz}$			6	pF

RATING AND CHARACTERISTIC CURVES (2N5551)

