

Product Features

- Excellent Insertion Loss and Isolation performance
- High Linearity
- RFFE 2.1 Control Interface
- Broadband frequency range: 0.1 to 3 GHz
- Small package: QFN-20 2.5mm x 2.5mm
- No DC blocking capacitors required
- 1kV HBM ESD Protection on all pins

Product Applications

- 2G/3G/4G multimode cellular tablets and Multi-Mode GSM, EDGE, WCDMA, LTE
- Diversity antenna switching

Product Description

The FM86C0 is a Silicon On Insulator (SOI) Single Pole, Twelve Throw (SP12T) antenna switch with a Mobile Industry Processor Interface (MIPI) which require very low insertion loss, high isolation and high linearity performance.

The FM86C0 is manufactured in a compact 2.5mm x 2.5mm, 20-pin surface mount Quad Flat No-Lead (QFN) package.

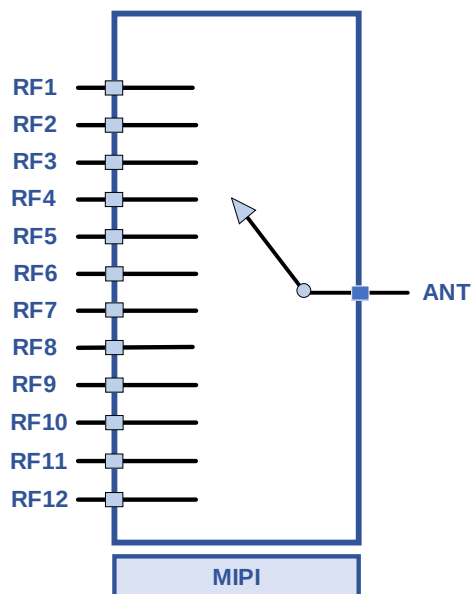


Figure 1 Functional Block Diagram



Absolute Maximum Conditions

Parameters	Symbol	Minimum	Maximum	Units
Supply voltage	V _{DD}	2.5	3.6	V
Digital control signal	V _{IO}		2	V
RF input power	P _{in}		+37	dBm
Storage temperature	T _{STG}	-55	+150	°C
Operating temperature	T _{OP}	-40	+90	°C
Human Body Model, Class 1C	ESD	1000		V

1: Test condition 50% duty cycle, VSWR=1:1, +25 °C

Note: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

General Electrical Specifications

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Units
Supply voltage	V _{DD}		2.5	2.8	3.6	V
Supply current, active mode	I _{DD}		100		150	μA
Interface supply	V _{IO}		1.65	1.8	1.95	V
Interface signal:						
High			0.8 × V _{IO}	V _{IO}	1.95	V
Low			0	0	0.3	
Control current:						
High	I _{CTL}		4		10	μA
Low						
Turn-on time (PIN = +27 dBm)	T _{ON}	Measured from 50% of final VDD supply voltage to 90% of RF power		/		
Switching time (PIN = +27 dBm)	T _{SW}	Measured from 50% of final VDD supply voltage to 90% of RF power	2		3	μs

(VDD = 2.85 V, VIO = 1.8 V, TOP = +25 °C, Characteristic Impedance [ZO] = 50 Ω, Unless Otherwise Noted)



RF Specifications

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Units
Operating frequency	f		0.1		3	GHz
Insertion loss	IL	Up to 1.0 GHz	0.49	0.51	0.52	dB
		Up to 2.0 GHz	0.57	0.61	0.68	
		Up to 2.7 GHz	0.60	0.66	0.80	
Isolation (ANT port to any receive port)	Iso	Up to 1.0 GHz	29.24	33.64	38.74	dB
		Up to 2.0 GHz	21.68	26.52	29.00	
		Up to 2.7 GHz	17.33	23.94	27.74	
Return loss	RL	All ports, up to 1.0 GHz	20	25		dB
		All ports, up to 2.0 GHz	15	20		
		All ports, up to 2.7 GHz	12	15		
2nd Order harmonics	2fo	Pin = +26 dBm,900MHz	-91	-86		dBm
3rd Order harmonics	3fo	Pin = +26 dBm,900MHz	-89	-74		dBm
0.1 dB Compression Point 50% duty cycle, VSWR=1:1	P0.1dB	900M, 50Ω		+37		dBm



Truth Table

Reg_1C	Reg_00								ANT-RFX
	D7	D6	D5	D4	D3	D2	D1	D0	
0x38	x	0	0	0	0	0	0	0	ISO
0x38	x	0	0	0	1	1	1	1	ISO
0x38	x	0	0	0	0	1	0	0	ANT-RF1 on
0x38	x	0	0	0	0	1	1	1	ANT-RF2 on
0x38	x	0	0	0	1	0	0	1	ANT-RF3 on
0x38	x	0	0	0	1	0	1	1	ANT-RF4 on
0x38	x	0	0	0	1	1	0	0	ANT-RF5 on
0x38	x	0	0	0	0	0	0	1	ANT-RF6 on
0x38	x	0	0	0	0	0	1	0	ANT-RF7 on
0x38	x	0	0	0	0	0	1	1	ANT-RF8 on
0x38	x	0	0	0	1	0	1	0	ANT-RF9 on
0x38	x	0	0	0	1	0	0	0	ANT-RF10 on
0x38	x	0	0	0	0	1	0	1	ANT-RF11 on
0x38	x	0	0	0	0	1	1	0	ANT-RF12 on



Register definition

Register 0, Address: 0x00 (MODE_CTRL)				
Register 0	Description	Default	Notes	Trig
[7:0]	MODE_CTRL	0x0	Switch control. See Truth Table	0
Register 1B, Address: 0x1B				
Register 1B	Description	Default	Notes	Trig
[7:4]	Reserved	0x0	Reserved	No
[3:0]	GSID	0x0	Group slave ID	No
Register 1C Address: 0x1C (PM_TRIG)				
Register 1C	Description	Default	Notes	Trig
[7:6]	PWR_MODE	0xA	00 = Normal Operation (ACTIVE) 01 = Default Settings (STARTUP) 10 = Low Power (LOW POWER) 11 = Reserved	No
[5]	Trigger Mask 2	0	Trigger Enable: 0 Trigger Disable: 1	No
[4]	Trigger Mask 1	0	Trigger Enable: 0 Trigger Disable: 1	No
[3]	Trigger Mask 0	0	Trigger Enable: 0 Trigger Disable: 1	No
[2]	Trigger Register 2	0	1 = Latch Register 2 contents	No
[1]	Trigger Register 1	0	1 = Latch Register 1 contents	No
[0]	Trigger Register 0	0	1 = Latch Register 0 contents	No
Register1D, Address: 0x01D (PM_ID)				
Register1D	Description	Default	Notes	Trig
[7:0]	Product ID	0X5F	Product ID = 0X5F	No
Register 1E, Address: 0x01E (MAN_ID)				
Register 1E	Description	Default	Notes	Trig
[7:0]	Manufacturer ID	0x78	Manufacturer ID[7:0] = 0x78	No
Register 1F Address: 0x01F (USID)				
Register 1F	Description	Default	Notes	Trig
[7:4]	Manufacturer ID	0x04	Manufacturer ID [11:8]	No
[3:0]	User ID	0xA	The default value at reset is selected via pin USID.	No



Pin-out Information

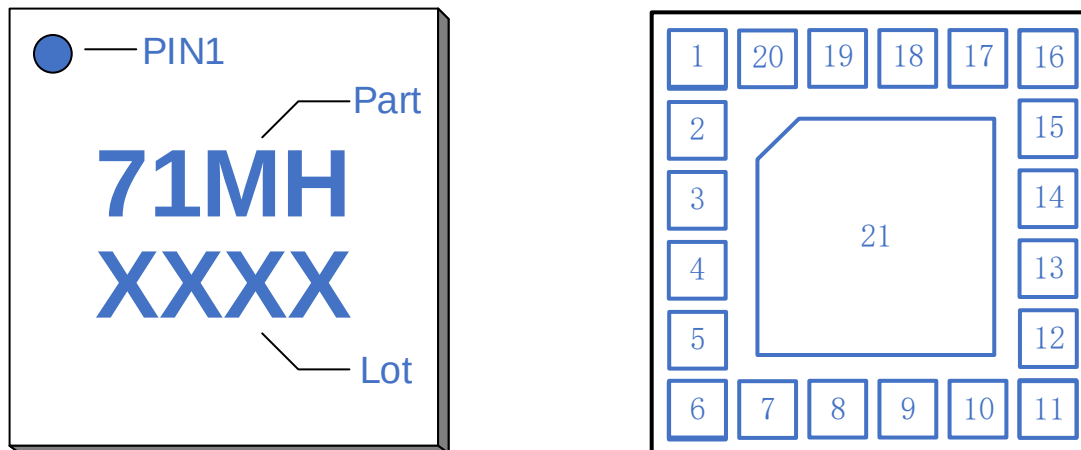


Figure 2 Pin-out Information

Table 1. Pin Description

Pin #	Name	Description	Pin #	Name	Description
1	ANT	Antenna in	11	RF11	RF Port 11
2	RF4	RF Port 4	12	RF1	RF Port 1
3	RF3	RF Port 3	13	RF8	RF Port 8
4	RF2	RF Port 2	14	RF7	RF Port 7
5	RF12	RF Port 12	15	RF6	RF Port 6
6	NC	Not Connect	16	RF5	RF Port 5
7	VDD	Supply voltage	17	GND	Ground
8	VIO	Digital control signal	18	RF10	RF Port 10
9	SDATA	MIPI Data input/output	19	RF9	RF Port 9
10	SCLK	MIPI Clock	20	GND	Ground
Ground Paddle	GND	Ground	21	GND	Ground



Application circuit

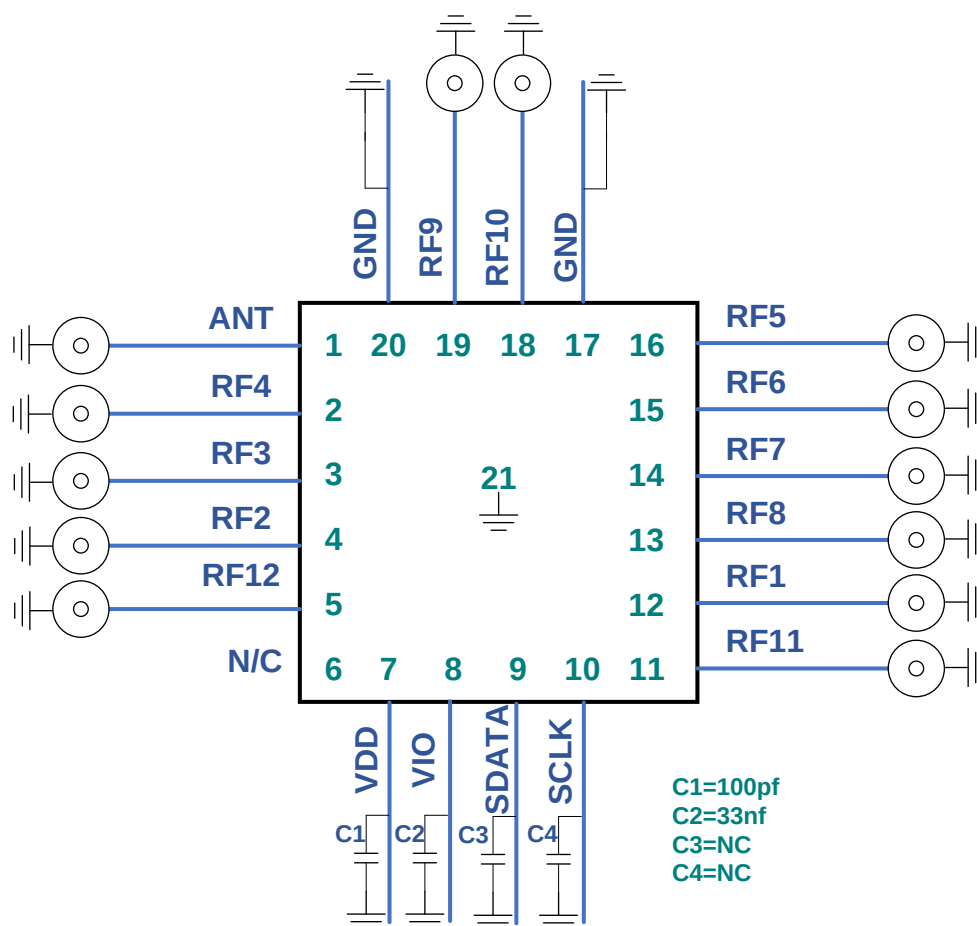


Figure 3 Application circuit

Evaluation Board

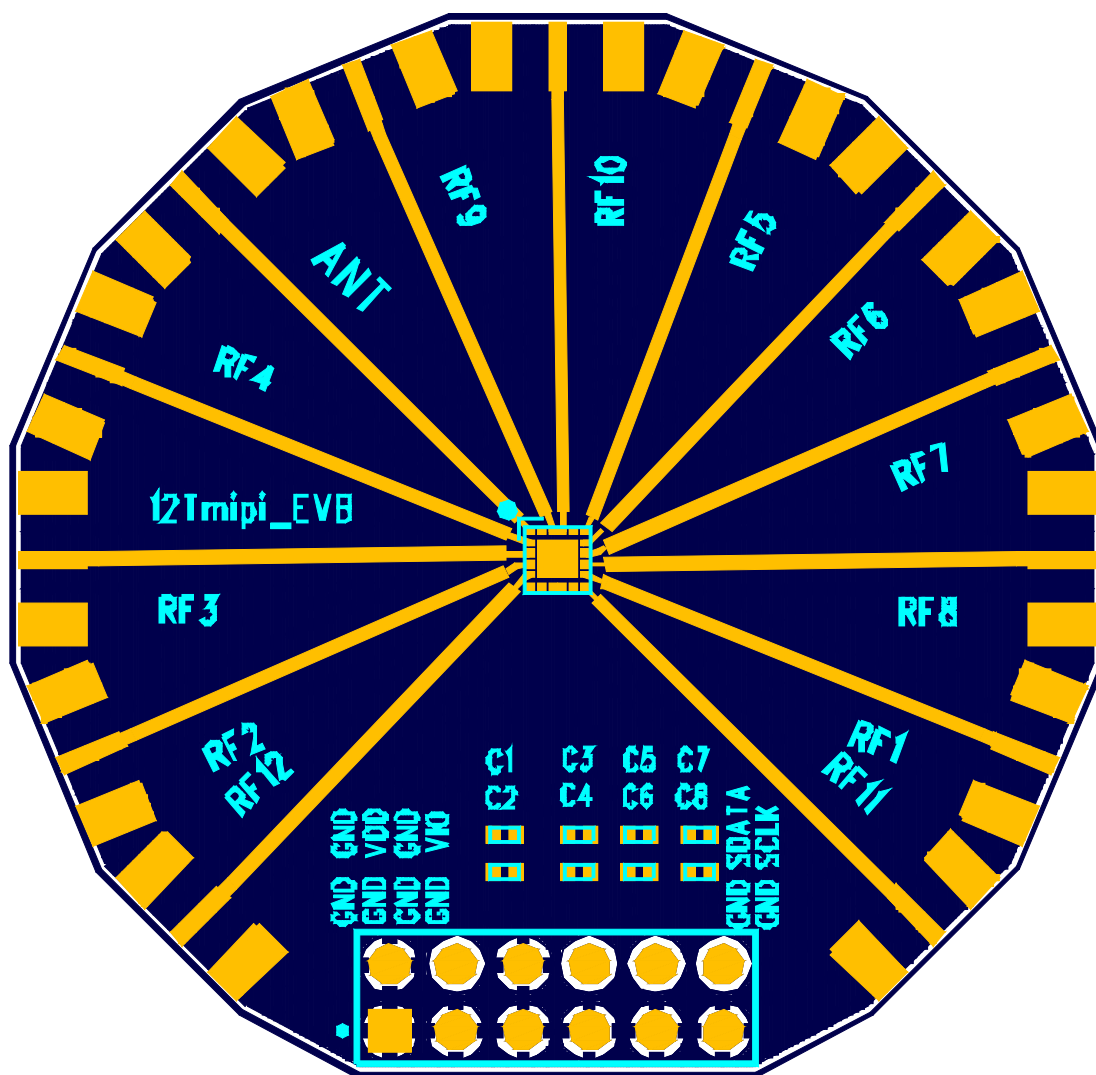


Figure 4 Evaluation Board Assembly Diagram



Package Outline Dimension

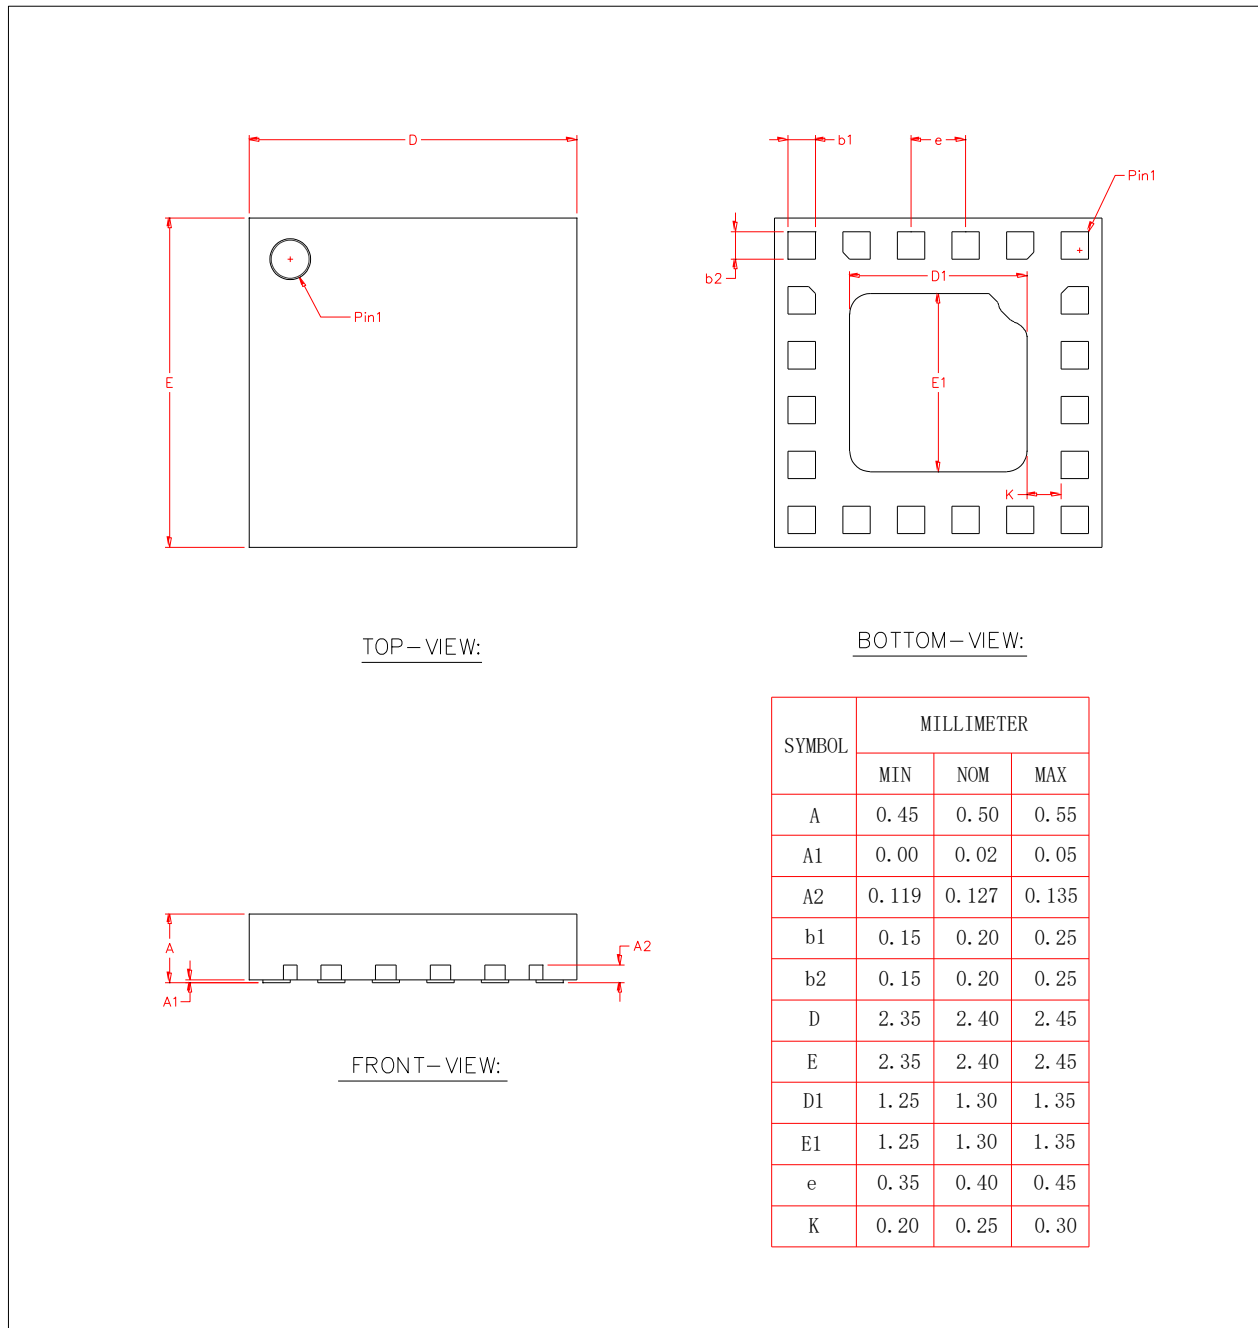


Figure 5 Package Outline Dimension



Package Dimensions (3000pcs)

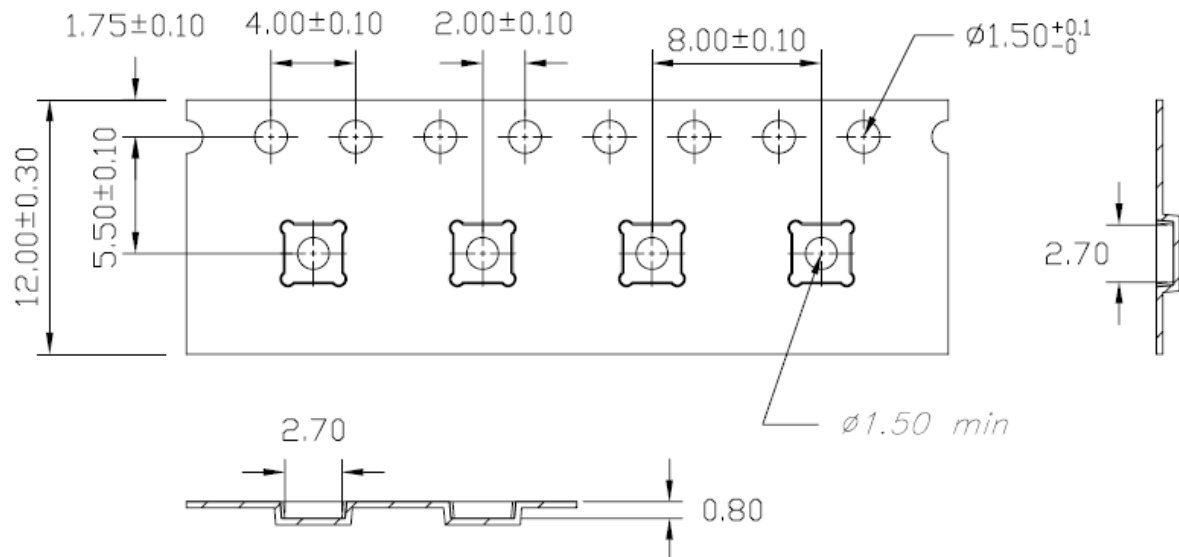


Figure 6 Tape and Reel Dimensions

Declaration of No Harmful Substances

This part is compliant with 2005/20/EC packaging directive, 1907/2006/EC REACH directive and the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

This product also has the following attributes:


- Lead free
- Halogen Free (Chlorine, Bromine)
- SVHC Free

Version Information

Version	Description	Data	Reviser
V1.2			



Reflow Chart

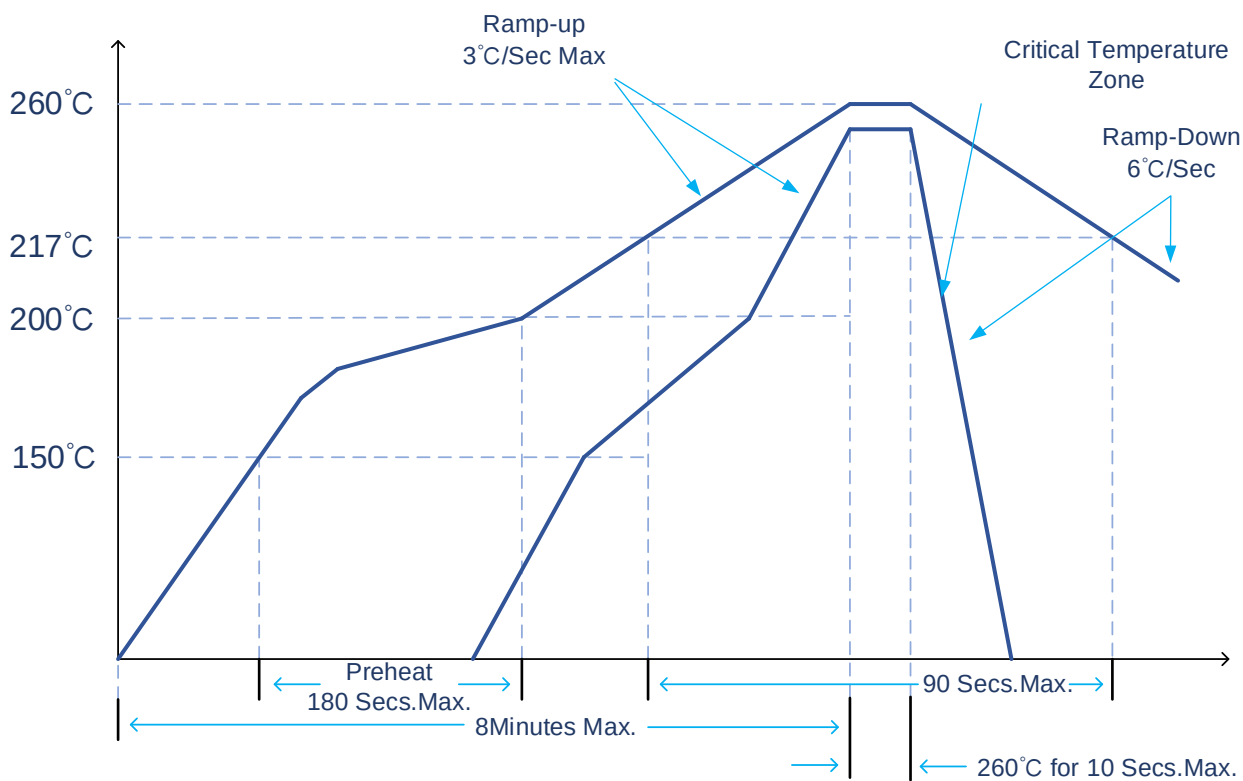

NOTE: Reflow Profile with 240°C peak also acceptable.