




100 mA, High Input Voltage LDO Linear Regulators QN6203 Series

General Description

QN6203 series are low-dropout linear voltage regulators with a built-in voltage reference module, error correction module and phase compensation module.

QN6203 series are based on the CMOS process and allow high voltage input with low quiescent current. This series can deliver 100mA output current and allow an input voltage as high as 40V. This series has the function of internal feedback resistor setting from 2.1V to 12V. The output accuracy is $\pm 2\%$.

Selection Guide

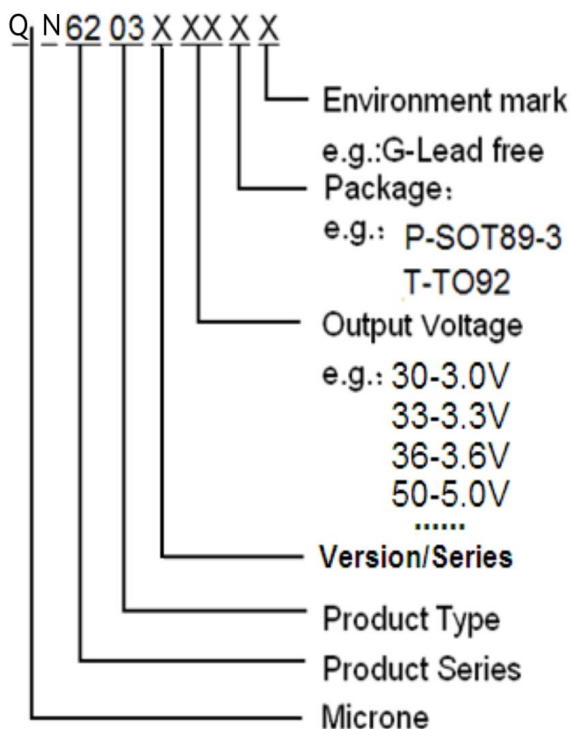


Features

- High output accuracy: $\pm 2\%$
- Input voltage: up to 40 V
- Output voltage: 2.1V ~ 12V
- Ultra-low quiescent current (Typ.= 3 μ A)
- Output Current: $I_{OUT} = 100\text{mA}$
(When $V_{IN} = 5.5\text{V}$ and $V_{OUT} = 3.3\text{V}$)
- Low temperature coefficient
- Ceramic capacitor can be used
- Package: SOT89-3、TO92、SOT23-3

Typical Application

- Electronic weighbridge
- SCM
- Phones, cordless phones
- Security Products
- Water meters, power meters


Typical Application Circuit

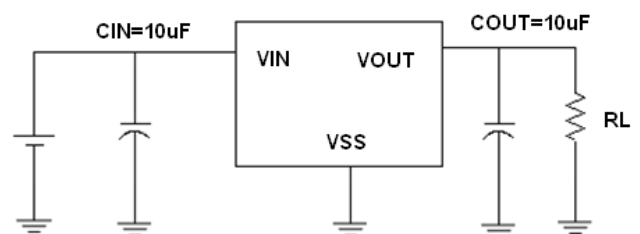


Suggesting : The circuit uses the electrolytic capacitors or tantalum capacitors in the best ,when it is applied in the high input voltage.




Pin Configuration

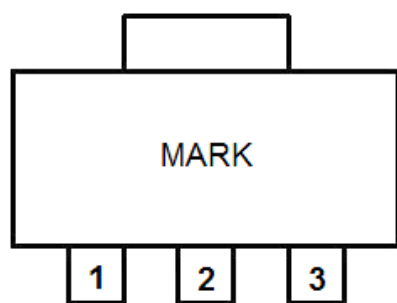

SOT89-3

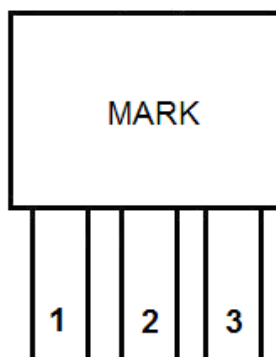

TO92



SOT23-3


Pin Assignment

QN6203AXX

Pin Number		Pin Name	Functions
SOT89-3 / TO92	SOT23-3		
1	1	V_{SS}	Ground
2	3	V_{IN}	Power Input
3	2	V_{OUT}	Output

Absolute Maximum Ratings

Parameter		Symbol	Ratings	Units
Input Voltage		V_{IN}	40	V
Output Current		I_{OUT}	150	mA
Output Voltage		V_{OUT}	$V_{SS}-0.3 \sim V_{IN}+0.3$	V
Power Dissipation	SOT89-3	P_D	500	mW
	TO92		500	mW
Operating Temperature Range		T_{OPR}	$-25 \sim +85$	$^{\circ}\text{C}$
Storage Temperature Range		T_{STG}	$-40 \sim +125$	$^{\circ}\text{C}$
Lead Temperature			260°C , 10sec	

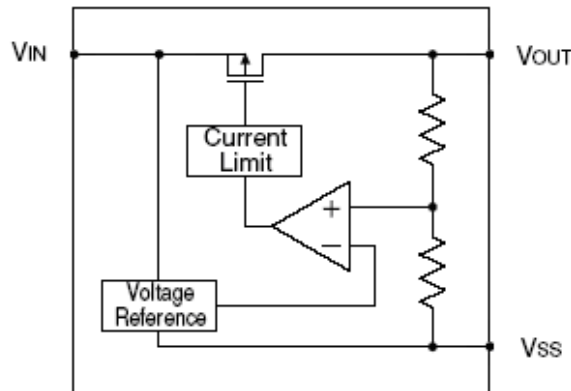**Block Diagram****Electrical Characteristics****QN6203A33**

($V_{IN} = V_{OUT} + 2.0V$, $C_{IN} = C_L = 10\mu F$, $T_a = 25^\circ C$, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT(E)}$ (Note 2)	$I_{OUT} = 10mA$	$\times 0.98$	$V_{OUT(T)}$ (Note 1)	$\times 1.02$	V
Input Voltage	V_{IN}				40	V
Maximum Output Current	I_{OUT_max}	$V_{IN} = V_{OUT} + 2.2V$		100		mA
Load Regulation	ΔV_{OUT}	$V_{IN} = V_{OUT} + 2.2V$, $1mA \leq I_{OUT} \leq 100mA$		30	60	mV
Dropout Voltage (Note 3)	V_{DIF}	$I_{OUT} = 10mA$		0.22		V
		$I_{OUT} = 50mA$		1.1		V
Supply Current	I_{SS}	$V_{IN} = V_{OUT} + 2V$		3	4	μA
Line Regulations	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$I_{OUT} = 1mA$ $V_{OUT} + 1V \leq V_{IN} \leq 40V$		0.04	0.1	%/V
Short-circuit Current	I_{SHORT}	$V_{OUT} = 0V$		20	40	mA
Temperature Coefficient	$\frac{\Delta V_{OUT}}{V_{OUT} \times \Delta T_a}$	$I_{OUT} = 10mA$ $-40^\circ C \leq T_a \leq 85^\circ C$		80		ppm/ $^\circ C$

Note :

1. $V_{OUT(T)}$: Specified Output Voltage

2. $V_{OUT(E)}$: Effective Output Voltage (ie. The output voltage when " $V_{OUT(T)} + 2.0V$ " is provided at the V_{IN} pin while maintaining a certain I_{OUT} value.)

3. $V_{DIF} = V_{IN1} - V_{OUT(E)'}$

V_{IN1} : The input voltage when $V_{OUT(E)'}$ appears as input voltage is gradually decreased.


$V_{OUT(E)'}$ = A voltage equal to 98% of the output voltage whenever an amply stabilized I_{OUT} and $\{V_{OUT(T)} + 2.2V\}$ is input.



Type Characteristics


(1) Output Voltage VS. Output Current ($T_a = 25^\circ\text{C}$)

QN6203A33 ($V_{IN}=V_{OUT}+2.2\text{V}$)

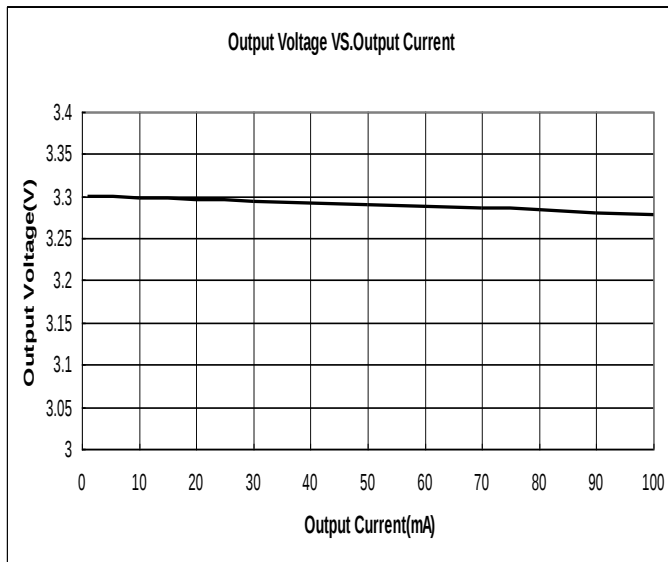


(2) Output Voltage VS. Input Voltage ($T_a = 25^\circ\text{C}$)

QN6203A33

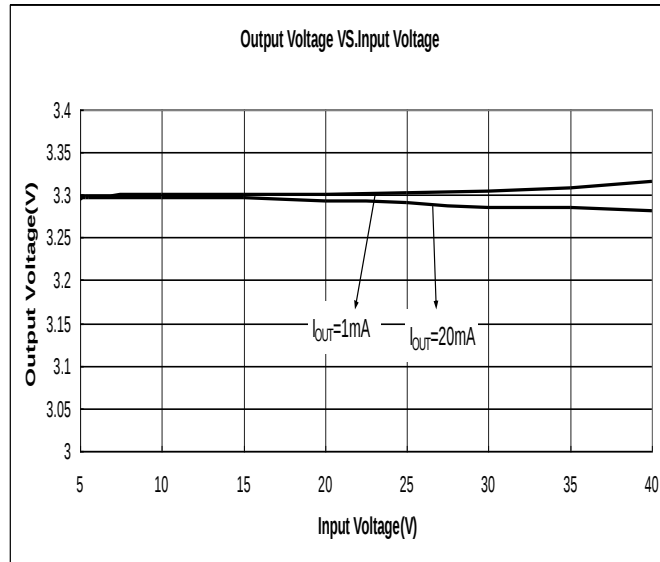


(3) Dropout Voltage VS. Output Current ($T_a = 25^\circ\text{C}$)

QN6203A33

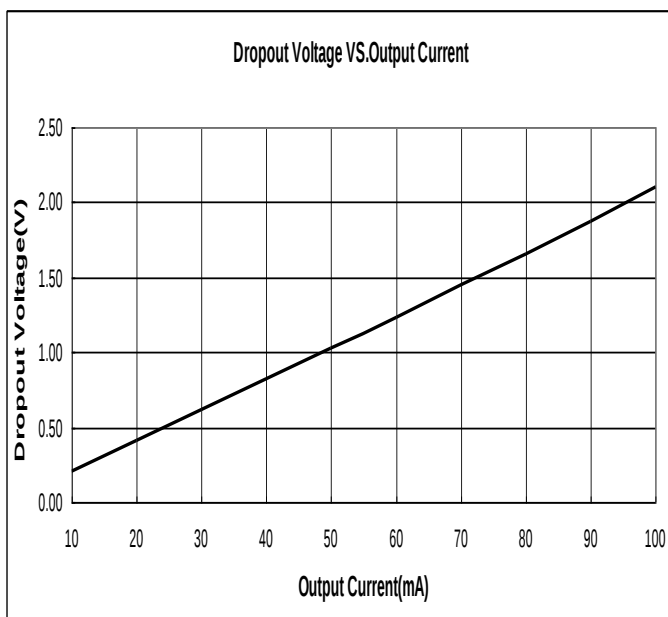

(4) Quiescent Current VS. Input Voltage ($T_a = 25^\circ\text{C}$)


QN6203A33

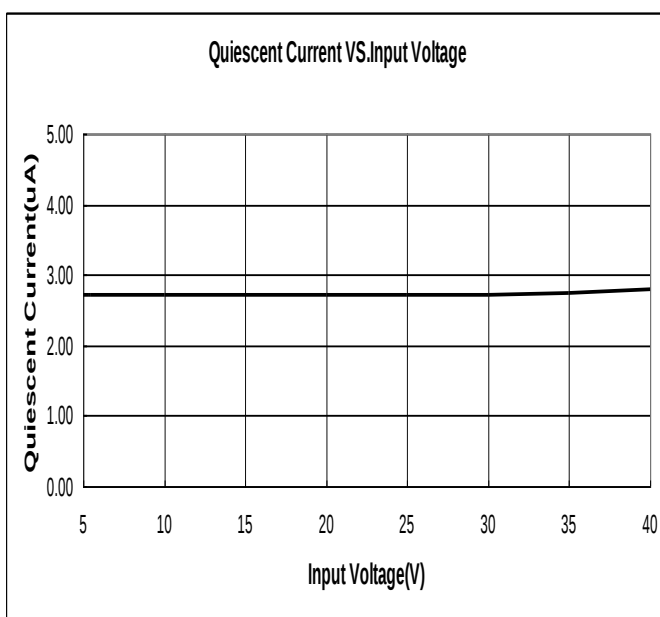




(5) Output Voltage VS. Temperature

QN6203A33 ($I_{OUT}=10mA$)

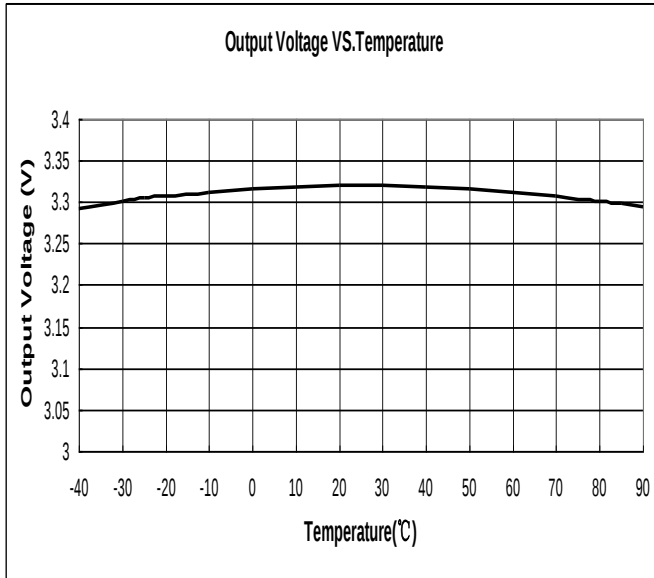


(6) Quiescent Current VS. Temperature

QN6203A33 ($V_{IN}=V_{OUT}+2.2V$)

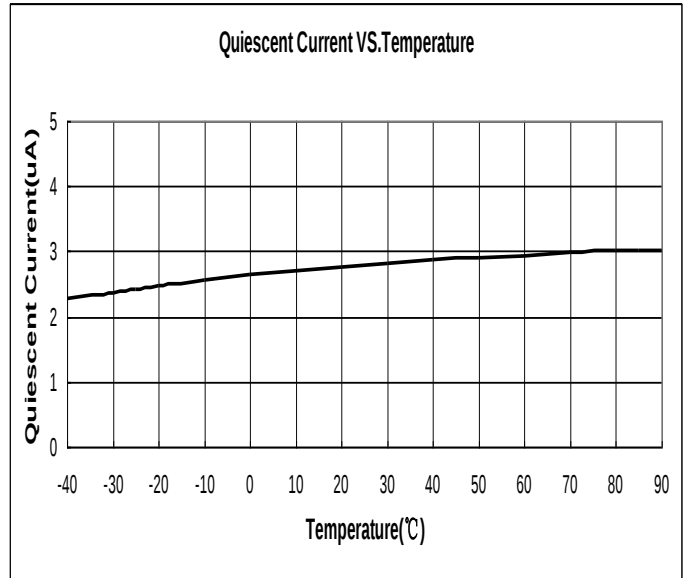




● TO-92

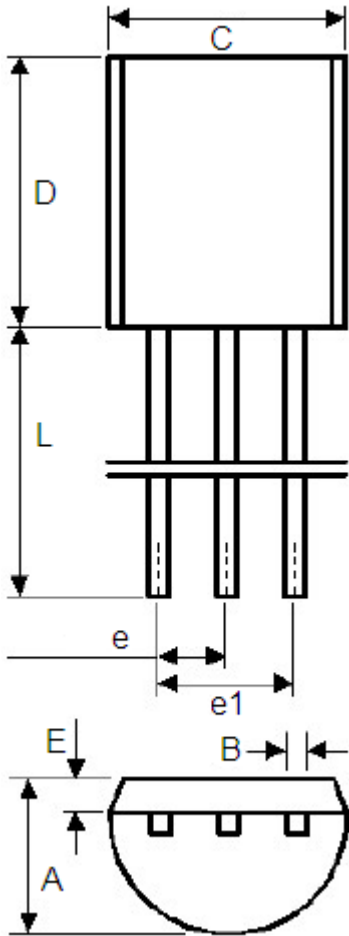

	Min	Max	Min	Max
A	3.4	3.8	0.13386	0.1496
B	0.3	0.5	0.0118	0.0197
C	4.4	4.8	0.1732	0.189
D	4.4	4.8	0.1732	0.189
E	0.9	1.5	0.0354	0.059
e	1.17	1.37	0.046	0.0539
e1	2.39	2.69	0.094	0.1059
L	12	16	0.4724	0.6299



● SOT23-3

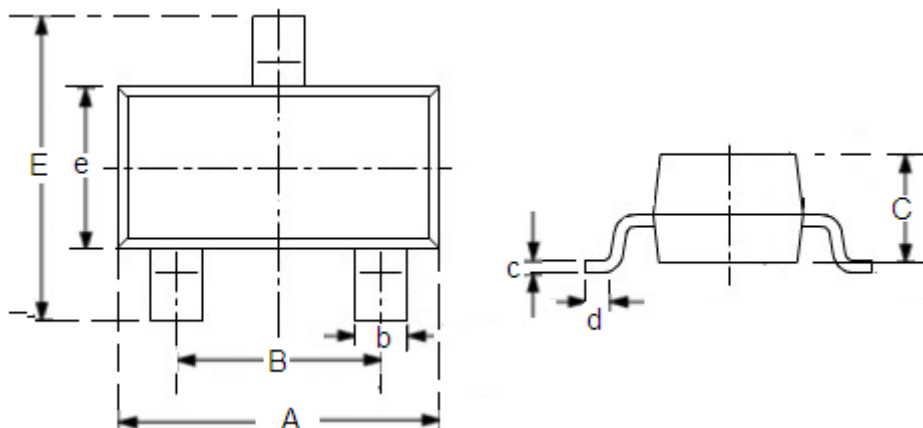

DIM	Millimeters		Inches	
	Min	Max	Min	Max
A	2.7	3.1	0.1063	0.122
B	1.7	2.1	0.0669	0.0827
b	0.35	0.5	0.0138	0.0197
C	1.0	1.2	0.0394	0.0472
c	0.1	0.25	0.0039	0.0098
d	0.2	-	0.0079	-
E	2.6	3.0	0.1023	0.1181
e	1.5	1.8	0.059	0.0708