



Features

- Planar Die Construction
- 500mW Power Dissipation on Ceramic PCB
- General Purpose, Medium Current
- Ideally Suited for Automated Assembly Processes
- Available in Lead Free Version



SOD-123



Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
HMMSZ5221-5259BT1G	SOD-123	XX	3000

XX=Device code, see table on page2 the marking code.

The marking bar indicates the cathode.

Absolute Maximum Ratings(Ta=25°C)

Characteristic	Symbol	Value	Unit
Forward voltage @I _F =10mA	V _F	0.85	V
Power Dissipation	P _D	500	mW
Thermal Resistance, Junction to Ambient Air	R _{θJA}	556	°C/W
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	-55 ~ +150	°C

Notes: Device mounted on ceramic PCB;5.0mm×7.0mm with pad areas 35 mm²









Electrical Characteristics (Ta=25℃ unless otherwise specified)

Type Number	Code	Zener Voltage Range (Note 2)				Maximum Zener Impedance (Note 4)			Maximum Reverse Current	
		V _Z @I _{ZT}			I _{ZT}	Z _{VT} @I _{ZT}	Z _{ZK} @I _{ZK}	I _{ZK}	I _R	V _R
		Nom(V)	Min(V)	Max(V)	mA	Ω		mA	uA	V
HMMSZ5221BT1G	C1	2.4	2.28	2.52	20	30	1200	0.25	100	1.0
HMMSZ5223BT1G	C3	2.7	2.57	2.84	20	30	1300	0.25	75	1.0
HMMSZ5225BT1G	C5	3.0	2.85	3.15	20	30	1600	0.25	50	1.0
HMMSZ5226BT1G	G1	3.3	3.14	3.47	20	28	1600	0.25	25	1.0
HMMSZ5227BT1G	G2	3.6	3.42	3.78	20	24	1700	0.25	15	1.0
HMMSZ5228BT1G	G3	3.9	3.71	4.10	20	23	1900	0.25	10	1.0
HMMSZ5229BT1G	G4	4.3	4.09	4.52	20	22	2000	0.25	5	1.0
HMMSZ5230BT1G	G5	4.7	4.47	4.94	20	19	1900	0.25	5	2.0
HMMSZ5231BT1G	E1	5.1	4.85	5.36	20	17	1600	0.25	5	2.0
HMMSZ5232BT1G	E2	5.6	5.32	5.88	20	11	1600	0.25	5	3.0
HMMSZ5233BT1G	E3	6.0	5.70	6.30	20	7	1600	0.25	5	3.5
HMMSZ5234BT1G	E4	6.2	5.89	6.51	20	7	1000	0.25	5	4.0
HMMSZ5235BT1G	E5	6.8	6.46	7.14	20	5	750	0.25	3	5.0
HMMSZ5236BT1G	F1	7.5	7.13	7.88	20	6	500	0.25	3	6.0
HMMSZ5237BT1G	F2	8.2	7.79	8.61	20	8	500	0.25	3	6.5
HMMSZ5238BT1G	F3	8.7	8.27	9.14	20	8	600	0.25	3	6.5
HMMSZ5239BT1G	F4	9.1	8.65	9.56	20	10	600	0.25	3	7.0
HMMSZ5240BT1G	F5	10	9.50	10.50	20	17	600	0.25	3	8.0
HMMSZ5241BT1G	H1	11	10.45	11.55	20	22	600	0.25	2.0	8.4
HMMSZ5242BT1G	H2	12	11.40	12.60	20	30	600	0.25	1.0	9.1
HMMSZ5243BT1G	H3	13	12.35	13.65	9.5	13	600	0.25	0.5	9.9
HMMSZ5244BT1G	H4	14	13.30	14.70	9.0	15	600	0.25	0.1	10
HMMSZ5245BT1G	H5	15	14.25	15.75	8.5	16	600	0.25	0.1	11
HMMSZ5246BT1G	J1	16	15.20	16.80	7.8	17	600	0.25	0.1	12
HMMSZ5247BT1G	J2	17	16.15	17.85	7.4	19	600	0.25	0.1	13
HMMSZ5248BT1G	J3	18	17.10	18.90	7.0	21	600	0.25	0.1	14
HMMSZ5250BT1G	J5	20	19.00	21.00	6.2	25	600	0.25	0.1	15
HMMSZ5251BT1G	K1	22	20.90	23.10	5.6	29	600	0.25	0.1	17
HMMSZ5252BT1G	K2	24	22.80	25.20	5.2	33	600	0.25	0.1	18
HMMSZ5253BT1G	K3	25	23.75	26.25	5.0	35	600	0.25	0.1	19
HMMSZ5254BT1G	K4	27	25.65	28.35	5.0	41	600	0.25	0.1	21
HMMSZ5255BT1G	K5	28	26.60	29.40	4.5	44	600	0.25	0.1	21
HMMSZ5256BT1G	M1	30	28.50	31.50	4.2	49	600	0.25	0.1	23
HMMSZ5257BT1G	M2	33	31.35	34.65	3.8	58	700	0.25	0.1	25
HMMSZ5258BT1G	M3	36	34.20	37.80	3.4	70	700	0.25	0.1	27
HMMSZ5259BT1G	M4	39	37.05	40.95	3.2	80	800	0.25	0.1	30






Typical Characteristics

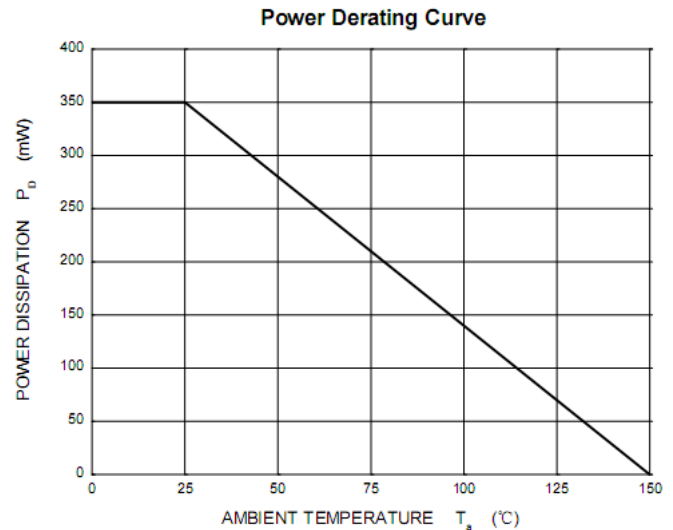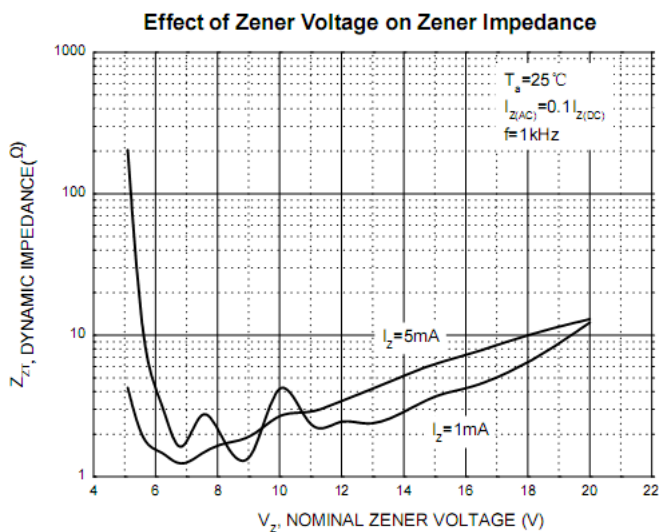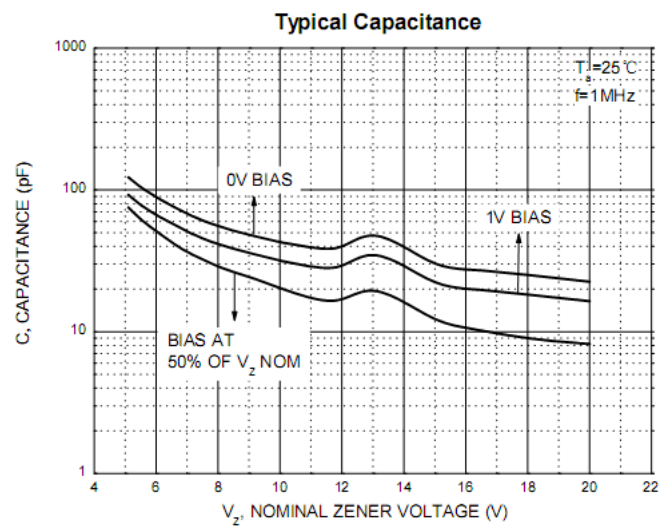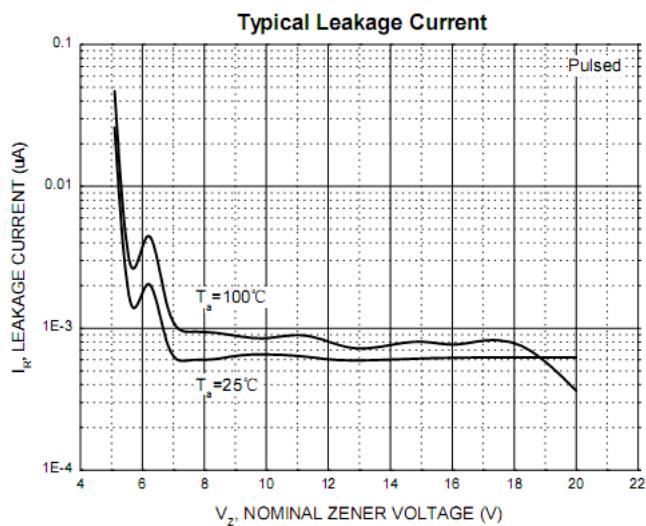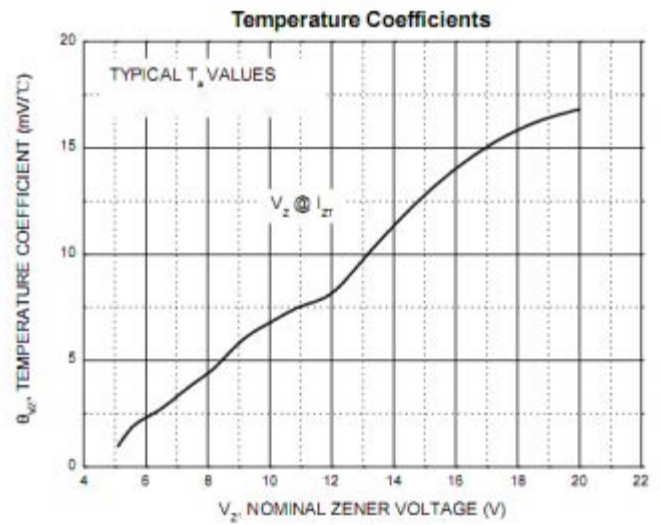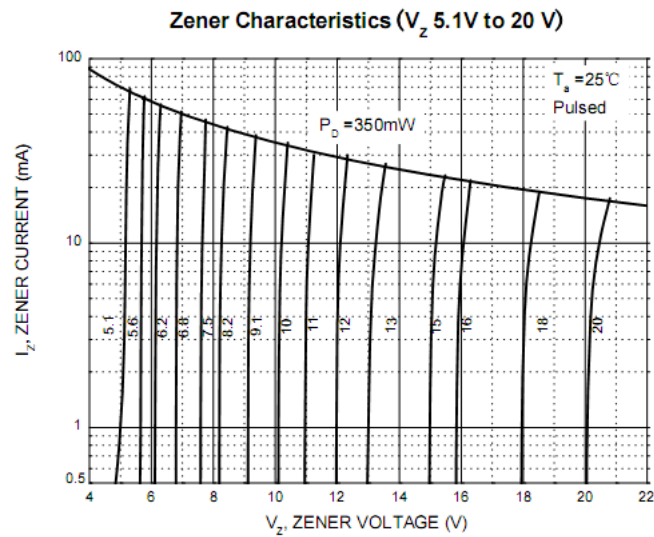




SOD-123 Package Outline Dimensions

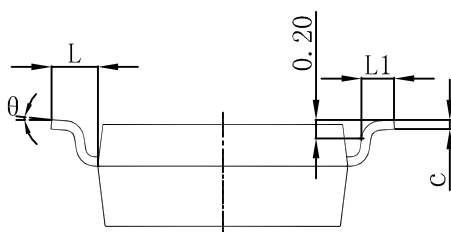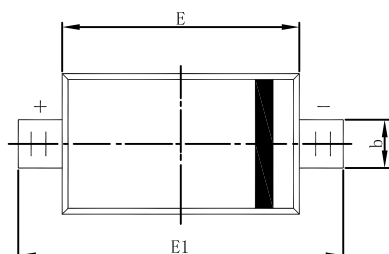

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.450	0.650	0.018	0.026
c	0.080	0.150	0.003	0.006
D	1.500	1.700	0.059	0.067
E	2.600	2.800	0.102	0.110
E1	3.550	3.850	0.140	0.152
L	0.500 REF		0.020 REF	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°

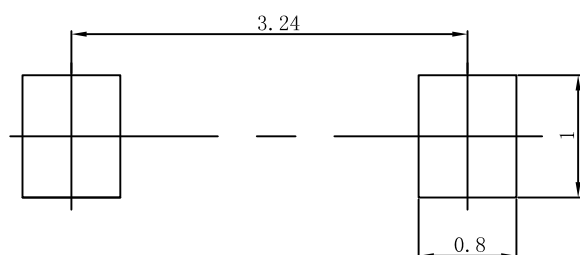

Note:
1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.