




Features

- For surface mounted applications in order to optimize board space.
- Low profile package.
- Glass passivated junction.
- Low inductance.
- Plastic package has Underwriters Laboratory Flammability.




SOD-123FL
(SMF)

Mechanical Data

- Case: JEDEC SOD-123FL/SMF molded plastic body
- Terminals: Solderable per MIL-STD-750, Method 2026A
- Polarity: Polarity symbol marking on body
- Mounting Position: Any
- Weight: 0.00±7ounce,0.02grams
- Marking: Date Code and Marking Code See Page 2

Part Number Code

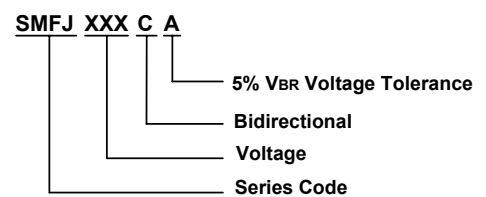

Applications

- I/O interface
- AC/D Cpower supply
- Low frequency signal transmission line (RS232, RS485, etc.)

Maximum Ratings (Ta=25°C unless otherwise noted)

Peak pulse power dissipation at 10/1000μs waveform (Note1, Note2, Fig.1)	P _{PPM}	200	W
Peak pulse current of at 10/1000μs waveform (Note 1, Fig.3)	I _{PPM}	See Tale	A
Steady state power dissipation at T _A =50°C (Fig.5)	P _{M(AV)}	1.0	W
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note3, Fig.6)	I _{FSM}	30	A
Operating junction and Storage Temperature Range.	T _J , T _{STG}	-65 to +150	°C
Typical thermal resistance junction to lead	R _{θJL}	38	°C/W
Typical thermal resistance junction to ambient	R _{θJA}	180	°C/W

Notes:1. Non-repetitive current pulse, per Fig.3 and derated above T_A=25°C per Fig.2.

2. Mounted on 5.0mm×5.0mm (0.03mm thick) copper pads to each terminal.

3. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.



Electrical Characteristics (Ta=25°C)

Type		Marking		VRMW	Breakdown Voltage		Test Current	Reverse Leakage	Max. Clamp Voltage	Peak Pulse Current
					VBR @ IT		IT	IR @ VRWM	VC @ IPP	IPP
					Min	Max				
Uni	Bi	Uni	Bi	V	V	V	mA	μA	V	A
SMFJ5.0A	SMFJ5.0CA	AE	NE	5	6.4	7	10	400	9.2	21.7
SMFJ6.0A	SMFJ6.0CA	AG	NG	6	6.67	7.37	10	400	10.3	19.4
SMFJ6.5A	SMFJ6.5CA	AK	NK	6.5	7.22	7.98	10	250	11.2	17.9
SMFJ7.0A	SMFJ7.0CA	AM	NM	7	7.78	8.6	10	100	12	16.7
SMFJ7.5A	SMFJ7.5CA	AP	NP	7.5	8.33	9.21	1	50	12.9	15.5
SMFJ8.0A	SMFJ8.0CA	AR	NR	8	8.89	9.83	1	25	13.6	14.7
SMFJ8.5A	SMFJ8.5CA	AT	NT	8.5	9.44	10.4	1	10	14.4	13.9
SMFJ9.0A	SMFJ9.0CA	AV	NV	9	10	11.1	1	5	15.4	13
SMFJ10A	SMFJ10CA	AX	NX	10	11.1	12.3	1	2.5	17	11.8
SMFJ11A	SMFJ11CA	AZ	NZ	11	12.2	13.5	1	2.5	18.2	11
SMFJ12A	SMFJ12CA	BE	OE	12	13.3	14.7	1	2.5	19.9	10.1
SMFJ13A	SMFJ13CA	BG	OG	13	14.4	15.9	1	1	21.5	9.3
SMFJ14A	SMFJ14CA	BK	OK	14	15.6	17.2	1	1	23.2	8.6
SMFJ15A	SMFJ15CA	BM	OM	15	16.7	18.5	1	1	24.4	8.2
SMFJ16A	SMFJ16CA	BP	OP	16	17.8	19.7	1	1	26	7.7
SMFJ17A	SMFJ17CA	BR	OR	17	18.9	20.9	1	1	27.6	7.2
SMFJ18A	SMFJ18CA	BT	OT	18	20	22.1	1	1	29.2	6.8
SMFJ20A	SMFJ20CA	BV	OV	20	22.2	24.5	1	1	32.4	6.2
SMFJ22A	SMFJ22CA	BX	OX	22	24.4	26.9	1	1	35.5	5.6
SMFJ24A	SMFJ24CA	BZ	OZ	24	26.7	29.5	1	1	38.9	5.1
SMFJ26A	SMFJ26CA	CE	PE	26	28.9	31.9	1	1	42.1	4.8
SMFJ28A	SMFJ28CA	CG	PG	28	31.1	34.4	1	1	45.4	4.4
SMFJ30A	SMFJ30CA	CK	PK	30	33.3	36.8	1	1	48.4	4.1
SMFJ33A	SMFJ33CA	CM	PM	33	36.7	40.6	1	1	53.3	3.8
SMFJ36A	SMFJ36CA	CP	PP	36	40	44.2	1	1	58.1	3.4
SMFJ40A	SMFJ40CA	CR	PR	40	44.4	49.1	1	1	64.5	3.1
SMFJ43A	SMFJ43CA	CT	PT	43	47.8	52.8	1	1	69.4	2.9
SMFJ45A	SMFJ45CA	CV	PV	45	50	55.3	1	1	72.7	2.8
SMFJ48A	SMFJ48CA	CX	PX	48	53.3	58.9	1	1	77.4	2.6
SMFJ51A	SMFJ51CA	CZ	PZ	51	56.7	62.7	1	1	82.4	2.4
SMFJ54A	SMFJ54CA	DE	PA	54	60	66.3	1	1	87.1	2.3
SMFJ58A	SMFJ58CA	DG	PC	58	64.4	71.2	1	1	93.6	2.1
SMFJ60A	SMFJ60CA	DK	CDK	60	66.7	73.7	1	1	96.8	1.8
SMFJ64A	SMFJ64CA	DM	CDM	64	71.1	78.6	1	1	103	1.7
SMFJ70A	SMFJ70CA	DP	CDP	70	77.8	86	1	1	113	1.5
SMFJ75A	SMFJ75CA	DR	CDR	75	83.3	92.1	1	1	121	1.4
SMFJ78A	SMFJ78CA	DT	CDT	78	86.7	95.8	1	1	126	1.4
SMFJ85A	SMFJ85CA	DV	CDV	85	94.4	104	1	1	137	1.3
SMFJ90A	SMFJ90CA	DX	CDX	90	100	111	1	1	146	1.2
SMFJ100A	SMFJ100CA	DZ	CDZ	100	111	123	1	1	162	1.1
SMFJ110A	SMFJ110CA	EE	CEE	110	122	135	1	1	177	1
SMFJ120A	SMFJ120CA	EG	CEG	120	133	147	1	1	193	0.9
SMFJ130A	SMFJ130CA	EK	CEK	130	144	159	1	1	209	0.8
SMFJ150A	SMFJ150CA	EM	CEM	150	167	185	1	1	243	0.7
SMFJ160A	SMFJ160CA	EP	CEP	160	178	197	1	1	259	0.7
SMFJ170A	SMFJ170CA	ER	CER	170	189	209	1	1	275	0.6
SMFJ180A	SMFJ180CA	ET	CET	180	201	222	1	1	292	0.5
SMFJ190A	SMFJ190CA	EV	CEV	190	211	232	1	1	308	0.5
SMFJ200A	SMFJ200CA	EX	CEX	200	224	247	1	1	324	0.5
SMFJ220A	SMFJ220CA	E22	CE22	220	246	272	1	1	356	0.5
SMFJ250A	SMFJ250CA	E25	CE25	250	279	309	1	1	405	0.5
SMFJ300A	SMFJ300CA	E30	CE30	300	335	371	1	1	486	0.45
SMFJ350A	SMFJ350CA	E35	CE35	350	391	432	1	1	567	0.4
SMFJ400A	SMFJ400CA	E40	CE40	400	447	494	1	1	648	0.35
SMFJ440A	SMFJ440CA	E44	CE44	440	492	543	1	1	713	0.3



Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Fig.1 Peak Pulse Power Rating Curve

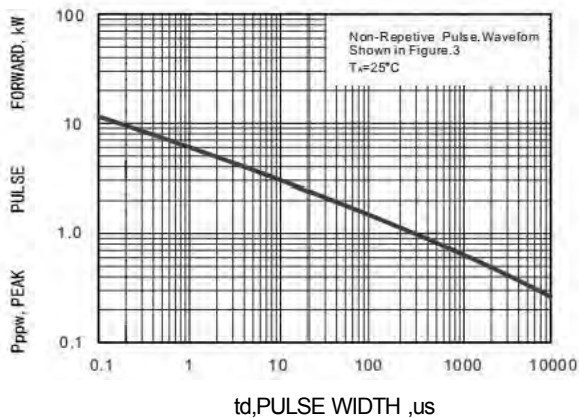


Fig.2 Forward Current Derating Curve

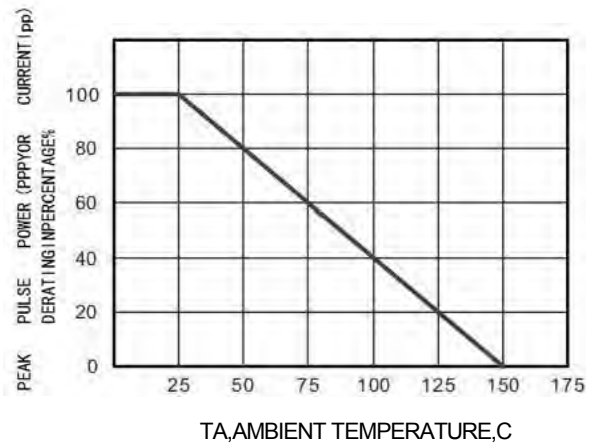


Fig.3 Pulse Waveform



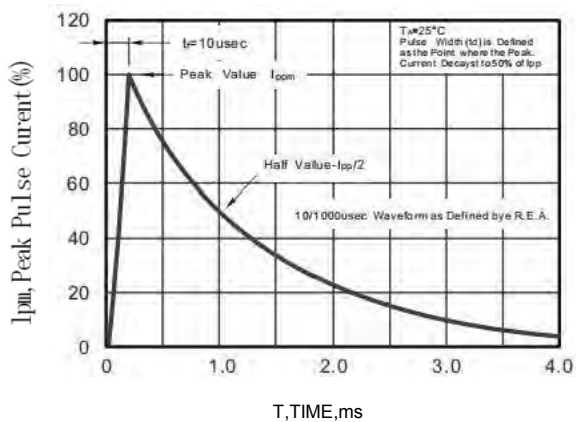


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current



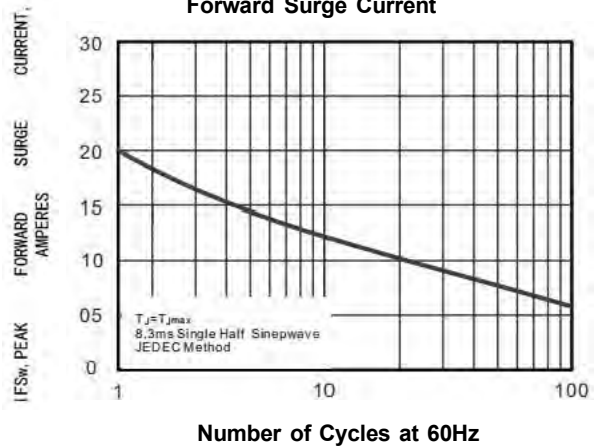

Package Outline Dimensions
SOD-123FL(SMF)

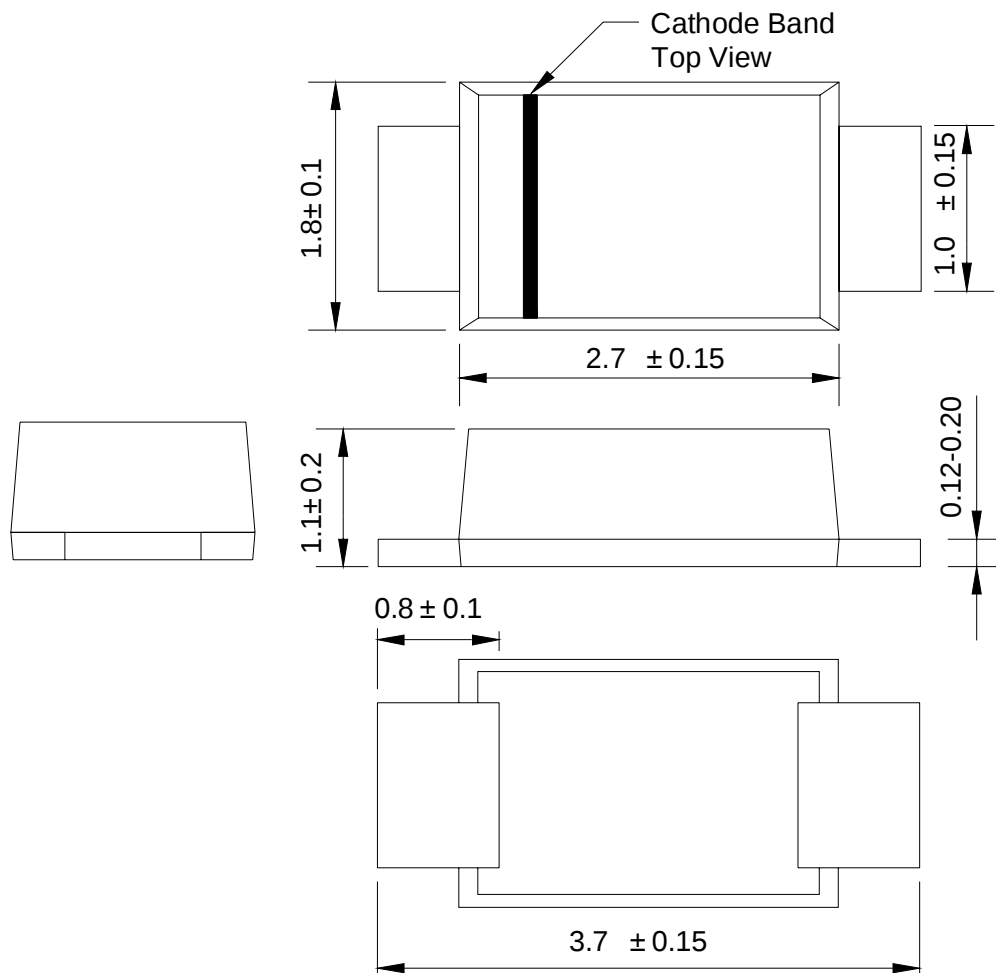



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.