



ZHEJIANG UNI-NE Technology CO., LTD

浙江宇力微新能源科技有限公司



## U3215C-6C Data Sheet

V 4.0

版权归浙江宇力微新能源科技有限公司

# High Current IO+/- 2.0/2.5A HALF-BRIDGE DRIVER

## General Description

The U3215C/U3216C Fully operated to +600V is high voltage, high speed power MOSFET and IGBT driver with dependent high and low side referenced output channels.

The logic input is compatible with standard CMOS or LSTTL output, down to 3.3V logic. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration which operates up to 600 volts.

## Product Summary

|                     |              |
|---------------------|--------------|
| V <sub>OFFSET</sub> | 600V max     |
| IO+/-               | 2.0 A / 2.5A |
| VCC                 | 5V - 20V     |
| ton/off (typ.)      | 320 & 200ns  |
| Deadtime (typ.)     | 120 ns       |
| Work Tem            | -40 ~125 °C  |


## Key Features

- Floating channel designed for bootstrap operation
- Fully operational to +600V
- Tolerant to negative transient voltage dV/dt immune
- Gate drive supply range from 5 to 20V
- Undervoltage lockout
- 3.3V, 5V and 15V input logic compatible
- Cross-conduction prevention logic
- Matched propagation delay for both channels

## Applications

- Home appliances
- Industrial applications and drives
- Motor drivers
- DC, AC, PMDC and PMAC motors
- Induction heating
- HVAC


## Packages




## Products Information

| Base Part Number | Package Type | Standard OUT |      | V <sub>OFFSET</sub> | Logic Control                 |
|------------------|--------------|--------------|------|---------------------|-------------------------------|
|                  |              | IO+          | IO-  |                     |                               |
| U3215C           | SOP8         | 2.0A         | 2.5A | 600V                | HIN & $\overline{\text{LIN}}$ |
| U3216C           | SOP8         | 2.0A         | 2.5A | 600V                | HIN & LIN                     |

## Pin Assignments

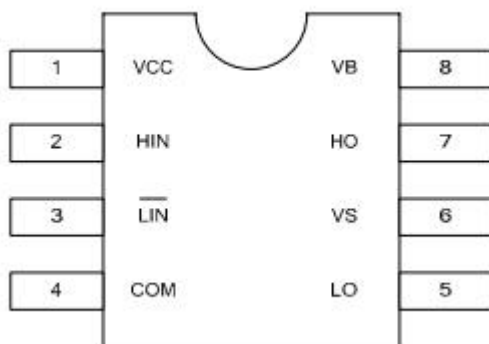

U3215C

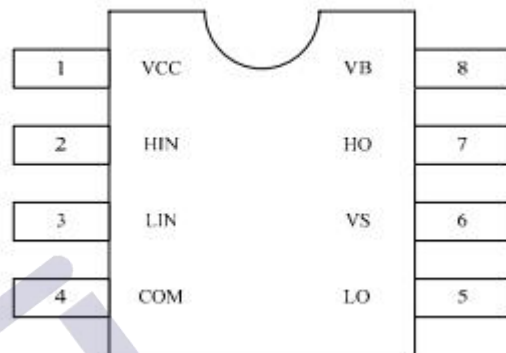


U3216C


## Pin Function

| Number | Symbol                  | Type | Description                                                     |
|--------|-------------------------|------|-----------------------------------------------------------------|
| 1      | VCC                     | P    | Low side and logic fixed supply                                 |
| 2      | HIN                     | I    | Logic input for high side gate driver outputs (HO), in phase    |
| 3      | LIN                     | I    | Logic input for low side gate driver outputs (LO), in phase     |
|        | $\overline{\text{LIN}}$ | I    | Logic input for low side gate driver outputs (LO), out of phase |
| 4      | COM                     | P    | Low side return                                                 |
| 5      | LO                      | O    | Low side gate drive output                                      |
| 6      | VS                      | P    | High side floating supply return                                |
| 7      | HO                      | O    | High side gate drive output                                     |
| 8      | VB                      | P    | High side floating supply                                       |

## Typical Connection

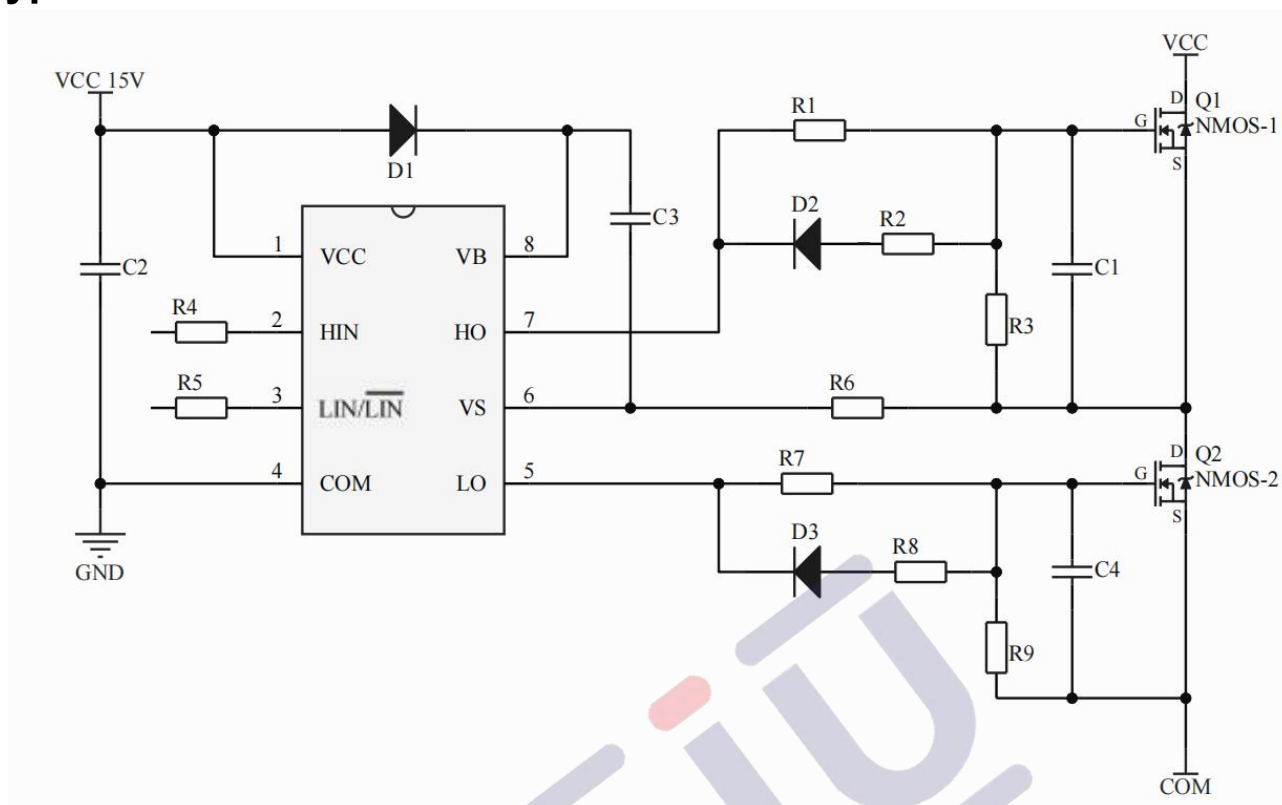

Typical application

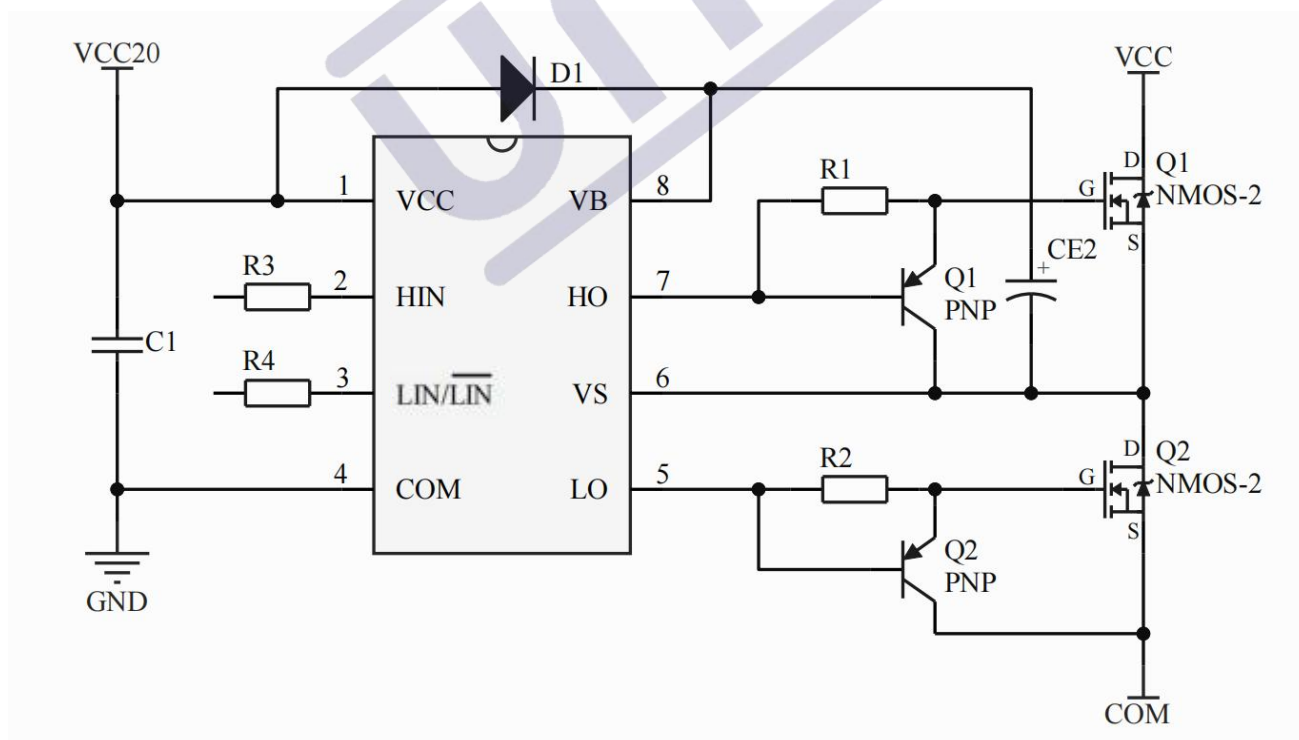

Much Big POWER application

**Note:** The above circuits and parameters are for reference only. The actual application circuit should be designed with the measured results in setting the paramete.

## Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

| Symbol         | Definition                                | Min.   | Max.    | Units |
|----------------|-------------------------------------------|--------|---------|-------|
| VB             | High side floating absolute voltage       | -0.3   | 625     | V     |
| VS             | High side floating supply offset voltage  | VB-25  | VB+0.3  |       |
| VHO            | High side floating output voltage         | VS-0.3 | VB+0.3  |       |
| VLO            | Low side output voltage                   | -0.3   | Vcc+0.3 |       |
| Vcc            | Low side and logic fixed supply voltage   | -0.3   | 25      |       |
| VIN            | Logic input voltage (HIN & LIN )          | -0.3   | Vcc+0.3 |       |
| dVS/dt         | Allowable offset supply voltage transient | —      | 55      | V/ns  |
| P <sub>D</sub> | Package power dissipation @ TA ≤ +25°C    | —      | 0.625   | W     |
| RthJA          | Thermal resistance, junction to ambient   | —      | 200     | °C/W  |
| TJ             | Junction temperature                      | —      | 150     | °C    |
| TS             | Storage temperature                       | -55    | 150     |       |
| TL             | Lead temperature (soldering, 10 seconds)  | —      | 300     |       |

## Recommended Operating Conditions

The Input/Output logic timing diagram is shown in Figure 1. For proper operation the device should be used within the recommended conditions. The VS offset rating is tested with all supplies biased at 15V differential.

| Symbol | Definition                                 | Min.      | Max.    | Units |
|--------|--------------------------------------------|-----------|---------|-------|
| VB     | High side floating supply absolute voltage | VS + 5    | VS + 20 | V     |
| VS     | High side floating supply offset voltage   | -6(Note1) | 600     |       |
| VHO    | High side floating output voltage          | VS        | VB      |       |
| VLO    | Low side output voltage                    | 0         | VCC     |       |
| VCC    | Low side and logic fixed supply voltage    | 5.0       | 20      |       |
| VIN    | Logic input voltage (HIN&LIN )             | 0         | VCC     |       |
| TA     | Ambient temperature                        | -40       | 125     | °C    |

Note1: Logic operational for VS of -6 to +600V. Logic state held for VS of -6V to -VBS.

## Electrical Characteristic

$V_{CC} = V_{BS} = V_{BIAS} = 15V$ ,  $CL=1000pF$ ,  $TA = 25^{\circ}C$ , unless otherwise specified.

| Symbol    | Definition                                                      | Min. | Typ. | Max. | Units | Test Conditions |
|-----------|-----------------------------------------------------------------|------|------|------|-------|-----------------|
| $t_r$     | Turn-on rise time                                               | —    | 20   | 50   | ns    |                 |
| $t_f$     | Turn-off fall time                                              | —    | 18   | 48   |       |                 |
| $t_{on}$  | Turn-on propagation delay                                       | —    | 320  | 400  |       | $V_S = 0V$      |
| $t_{off}$ | Turn-off propagation delay                                      | —    | 200  | 260  |       | $V_S = 400V$    |
| DT        | Deadtime, LS turn-off to HS turn-on & HS turn-on to LS turn-off | —    | 120  | —    |       |                 |
| MT        | Delay matching, HS & LS turn-on/off                             | —    | —    | 70   |       |                 |



## Electrical Characteristic


$V_{CC} = V_{BS} = V_{BIAS} = 15V$ ,  $TA = 25^{\circ}C$ , unless otherwise specified.

| Symbol                                                 | Definition                                                  | Min. | Typ. | Max. | Units | Test Conditions             |
|--------------------------------------------------------|-------------------------------------------------------------|------|------|------|-------|-----------------------------|
| <b>Low Side Power Supply Characteristics</b>           |                                                             |      |      |      |       |                             |
| $V_{CCUV+}$                                            | VCC supply under-voltage positive going threshold           | —    | 4.8  | —    | V     |                             |
| $V_{CCUV-}$                                            | VCC supply under-voltage negative going threshold           | —    | 4.5  | —    | V     |                             |
| $V_{CCHYS}$                                            | VCC supply under-voltage lockout hysteresis                 | —    | 0.3  | —    | V     |                             |
| <b>High Side Floating Power Supply Characteristics</b> |                                                             |      |      |      |       |                             |
| $V_{BSUV+}$                                            | High side VBS supply under-voltage positive going threshold | —    | 4.9  | —    | V     |                             |
| $V_{BSUV-}$                                            | High side VBS supply under-voltage negative going threshold | —    | 4.6  | —    | V     |                             |
| $V_{BSUVHS}$                                           | High side VBS supply under-voltage lockout hysteresis       | —    | 0.3  | —    | V     |                             |
| IQCC                                                   | Quiescent VCC supply current                                | —    | 100  | —    | uA    | $V_{in} = 0V$ or $5V$       |
| IQBS                                                   | Quiescent VBS supply current                                | —    | 32   | —    |       | $V_{in} = 0V$ or $5V$       |
| ILK                                                    | Offset supply leakage current                               | —    | —    | 3    |       | $V_B = V_S = 400V$          |
| $V_{IH}$                                               | Logic "1" (HO) & Logic "0" (LO) input voltage               | 3    | —    | —    | V     | $V_{CC} = 5V$ to $20V$      |
| $V_{IL}$                                               | Logic "0" (HO) & Logic "1" (LO) input voltage               | —    | —    | 0.8  |       | $V_{CC} = 5V$ to $20V$      |
| $I_{IN+}$                                              | Logic "1" input bias current                                | —    | 20   | 50   | uA    | $V_{IN} = 5V$ $I_{IN} = 0V$ |
| $I_{IN-}$                                              | Logic "0" input bias current                                | —    | —    | 1    |       | $V_{IN} = 5V$ $I_{IN} = 0V$ |
| VOH                                                    | High level output voltage, $V_{BIAS} - V_O$                 | —    | —    | 100  | mV    | $I_O = 0A$                  |
| VOL                                                    | Low level output voltage, $V_O$                             | —    | —    | 100  |       | $I_O = 0A$                  |

|     |                                          |   |      |   |    |                                                     |
|-----|------------------------------------------|---|------|---|----|-----------------------------------------------------|
| IO+ | Output high short circuit pulsed current | — | 2000 | — | mA | $V_O = 0V$ $V_{IN} = V_{IH}$<br>$PW \leq 10 \mu s$  |
| IO- | Output low short circuit pulsed current  | — | 2500 | — |    | $V_O = 15V$ $V_{IN} = V_{IL}$<br>$PW \leq 10 \mu s$ |

## Block Diagram

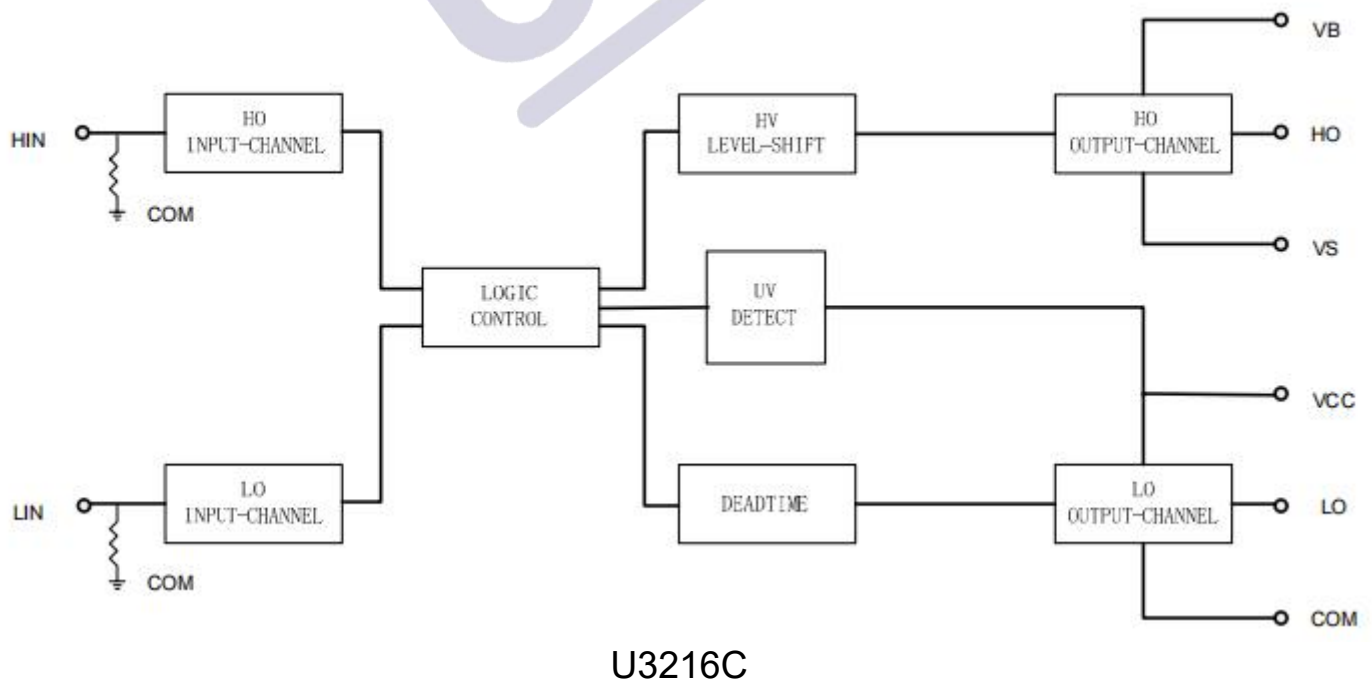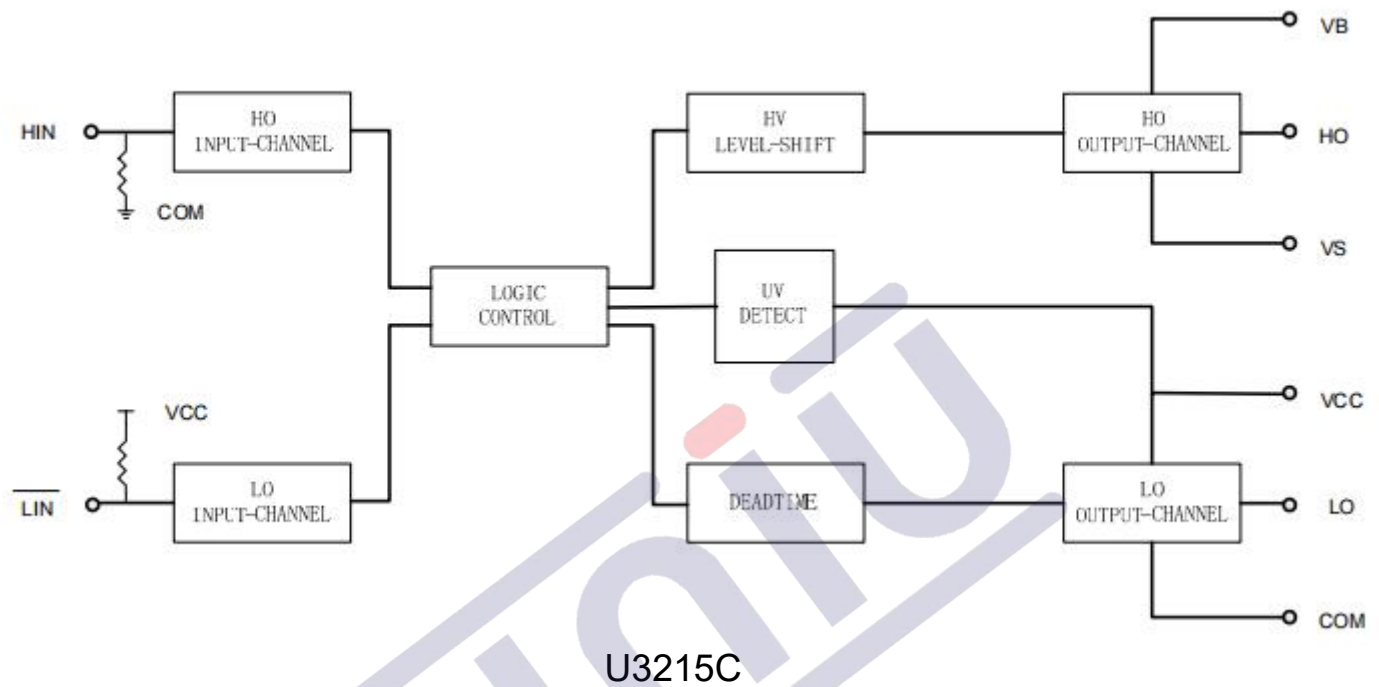


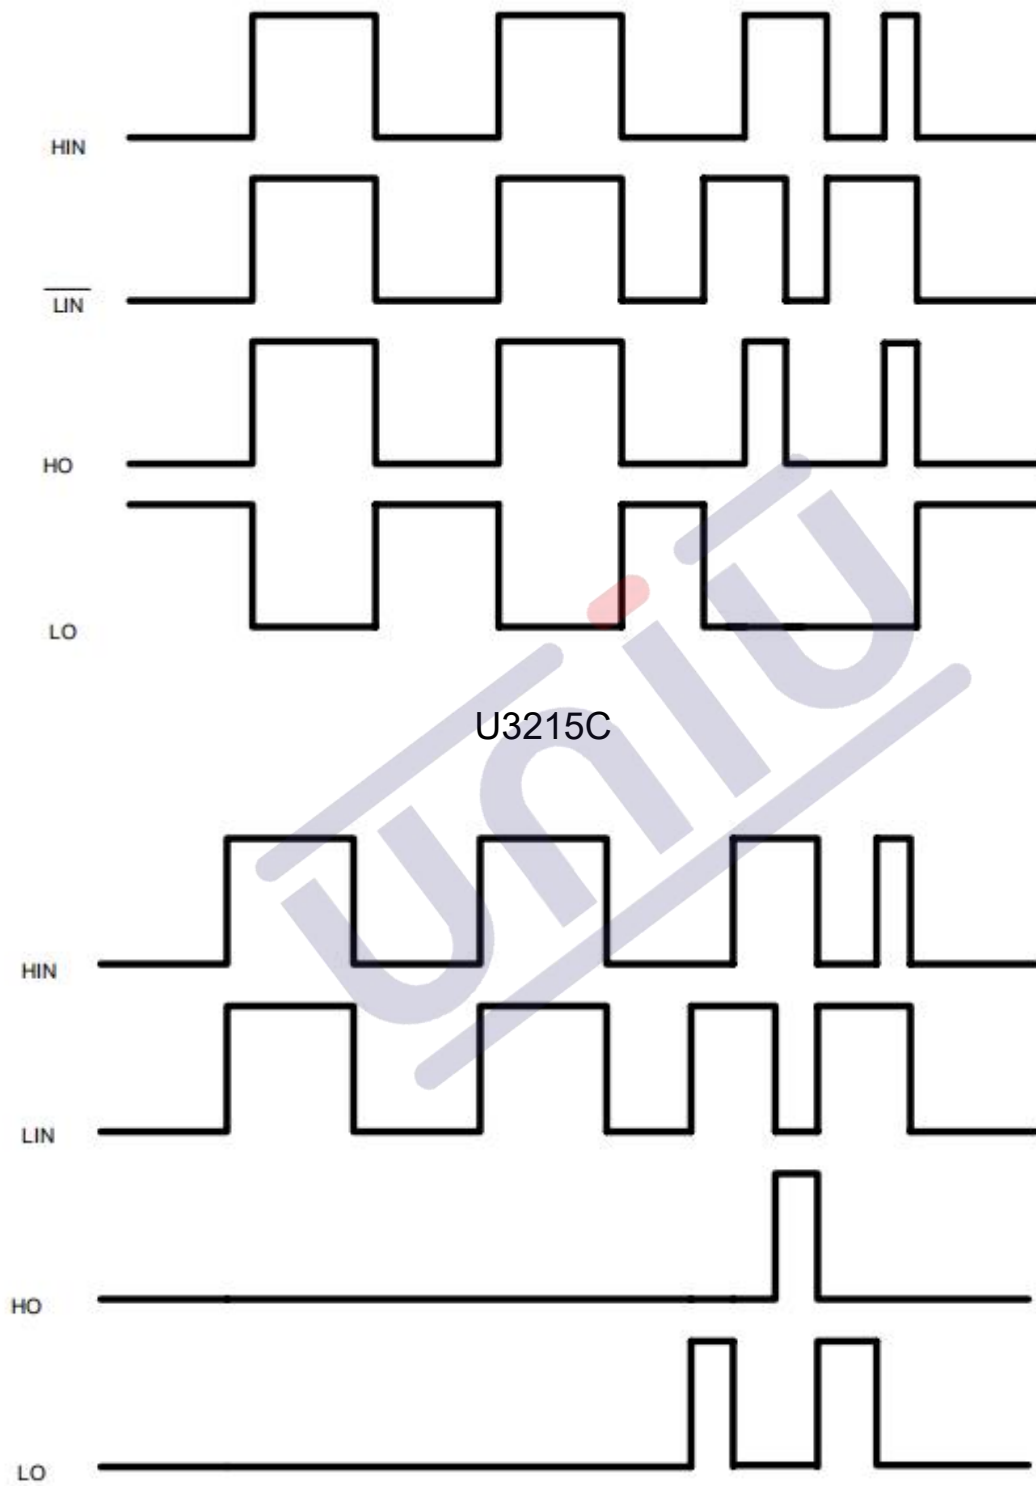**Time waveform**

U3216C




## Time waveform

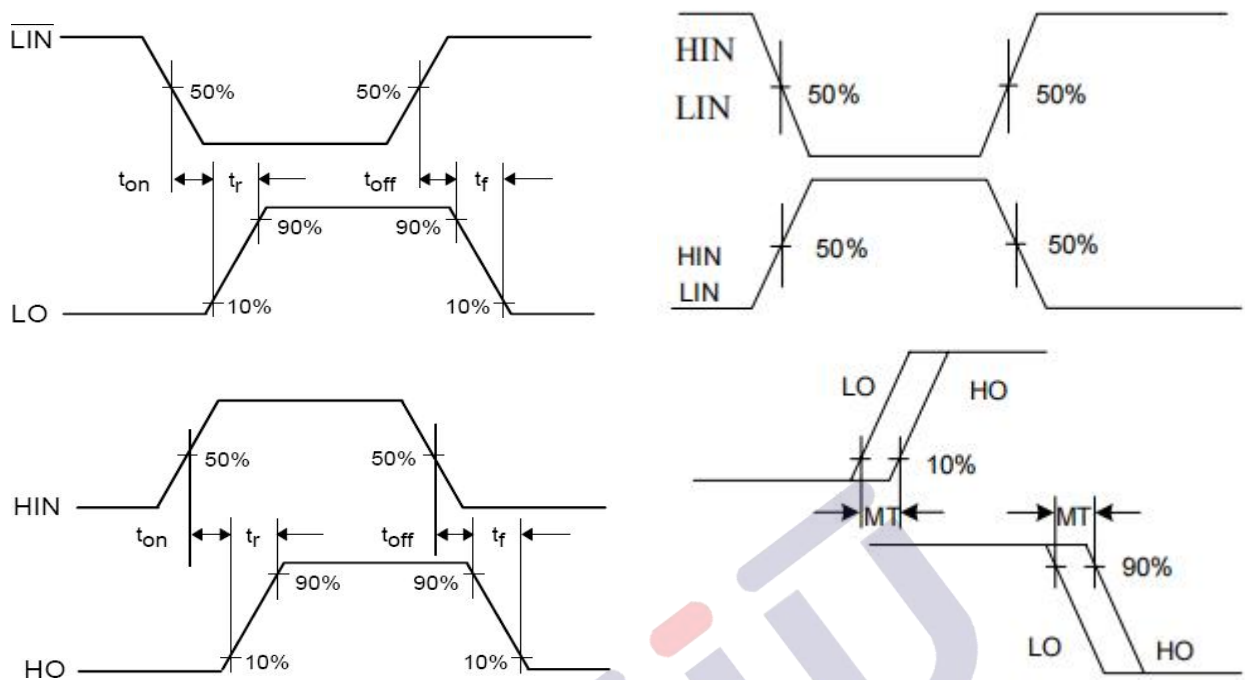


Switching Time Waveform Definitions

Delay matching time Definitions

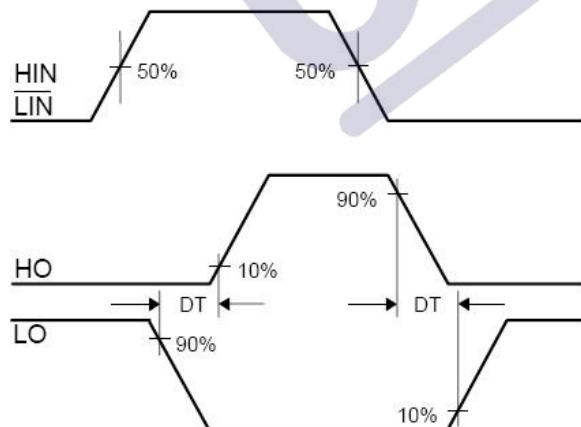

Deadtime Waveform Definitions

## Packaging information

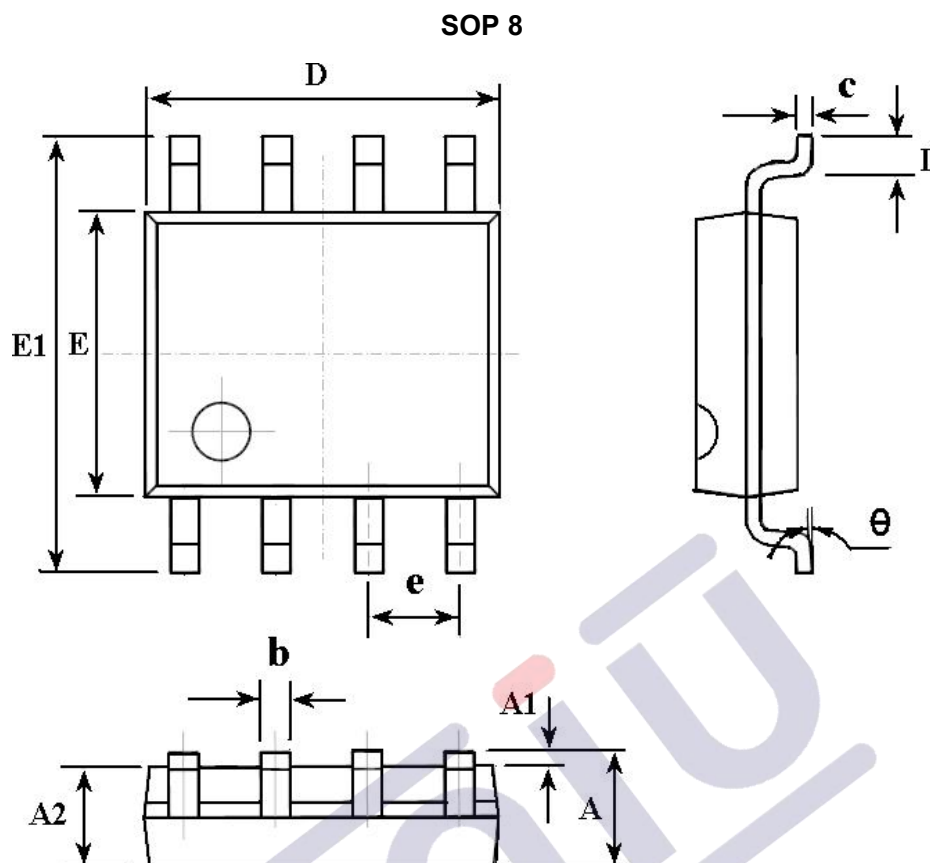

| Symbol   | Dimensions In Millimeters |       |
|----------|---------------------------|-------|
|          | Min                       | Max   |
| A        | 1.350                     | 1.750 |
| A1       | 0.100                     | 0.250 |
| A2       | 1.350                     | 1.550 |
| b        | 0.330                     | 0.510 |
| c        | 0.170                     | 0.250 |
| D        | 4.700                     | 5.100 |
| E        | 3.800                     | 4.000 |
| E1       | 5.800                     | 6.200 |
| e        | 1.270(BSC)                |       |
| L        | 0.400                     | 1.270 |
| $\theta$ | 0°                        | 8°    |

## 1、版本记录

| DATE       | REV. | DESCRIPTION |
|------------|------|-------------|
| 2018/04/19 | 1.0  | 首次发布        |
| 2019/05/21 | 2.0  | 变更封装        |
| 2021/10/18 | 3.0  | 布局调整        |
| 2023/8/26  | 4.0  | 优化电路        |

## 2、免责声明

浙江宇力微新能源科技有限公司保留对本文档的更改和解释权力，不另行通知！

客户在下单前应获取我司最新版本资料，并验证相关信息是否最新和完整。量产方案需使用方自行验证并自担所有批量风险责任。未经我司授权，该文件不得私自复制和修改。

产品不断提升，以追求高品质、稳定性强、可靠性高、环保、节能、高效为目标，我司将竭诚为客户提供性价比高的系统开发方案、技术支持等更优秀的服务。

版权所有 浙江宇力微新能源科技有限公司/绍兴宇力半导体有限公司

## 3、联系我们

浙江宇力微新能源科技有限公司

总部地址：绍兴市越城区斗门街道袍渚路25号中节能科创园45幢4/5楼

电话：0575-85087896（研发部）

传真：0575-88125157

E-mail:htw@uni-semic.com

无锡地址：无锡市锡山区先锋中路 6 号中国电子（无锡）数字芯城 1#综合楼 503室

电话:0510-85297939

E-mail:zh@uni-semic.com

深圳地址：深圳市宝安区西乡街道南昌社区宝源路泳辉国际商务大厦410

电话：0755-84510976

E-mail:htw@uni-semic.com