



ZHEJIANG UNI-NE Technology CO., LTD

浙江宇力微新能源科技有限公司



HT431AN Data Sheet

V 1.4

版权归浙江宇力微新能源科技有限公司

ADJUSTABLE PRECISION SHUNT REGULATORS

Description

The HT431AN is a three-terminal adjustable shunt regulator with guaranteed thermal stability over a full operation range. It features sharp turn-on characteristics, low temperature coefficient and low output impedance, which make it ideal substitute for Zener diode in applications such as switching power supply, charger and other adjustable regulators.

The output voltage of HT431AN can be set to any value between $V_{REF}(2.5V)$ and the corresponding maximum cathode voltage (36V).

The HT431AN precision reference is offered in two voltage tolerance: 0.3%, 0.5%.


Features

- Programmable Precise Output Voltage from 2.5V to 36V
- High Stability under Capacitive Load
- Low Temperature Deviation: 4.5mV Typical
- Low Equivalent Full-range Temperature
- Coefficient with 20PPM/°C Typical
- Sink Current Capacity from 1mA to 100mA
- Low Output Noise
- Wide Operating Range of -40 to +125°C
- Lead-Free Packages: SOT-23
- Totally Lead-Free & Fully RoHS Compliant

Applications

- Charger
- Voltage Adapter
- Switching Power Supply
- Graphic Card
- Precision Voltage Reference


Pin Configuration

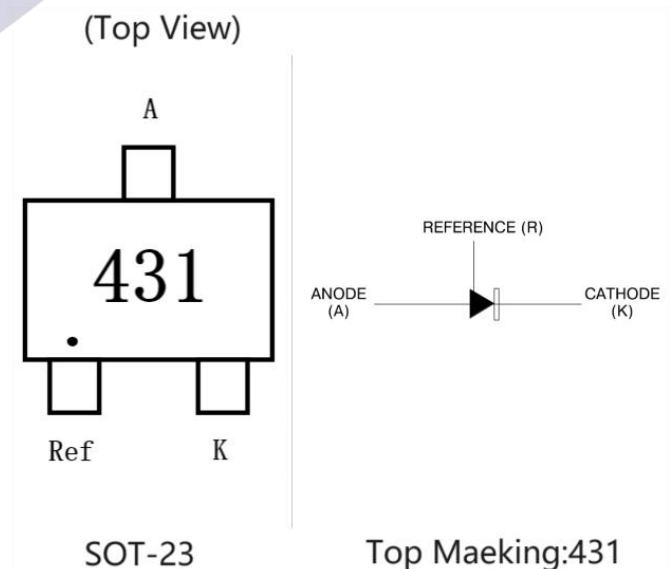


Ordering Information

Part Number	Description
HT431AN	SOT-23,halogern free,3000Pcs/Reel


Typical Applications Circuit

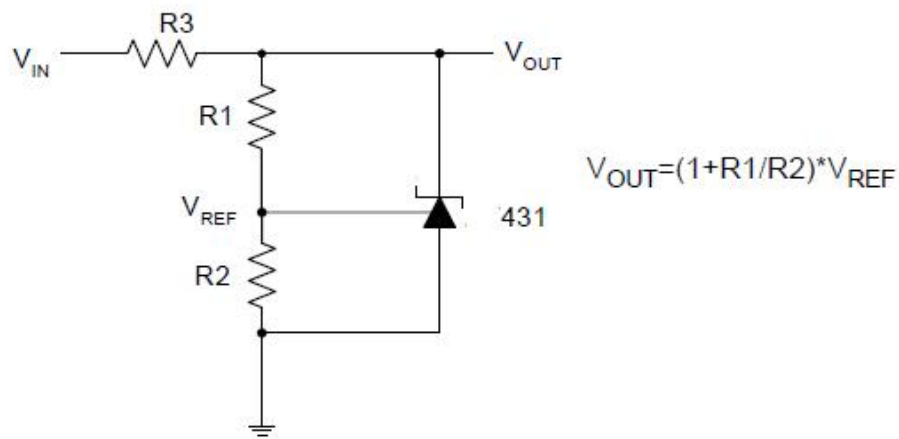

Shunt Regulator

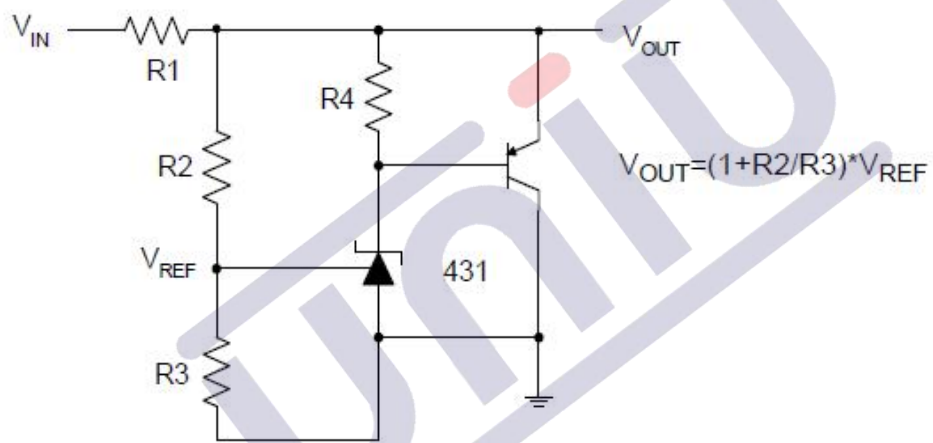


High Current Shunt Regulator

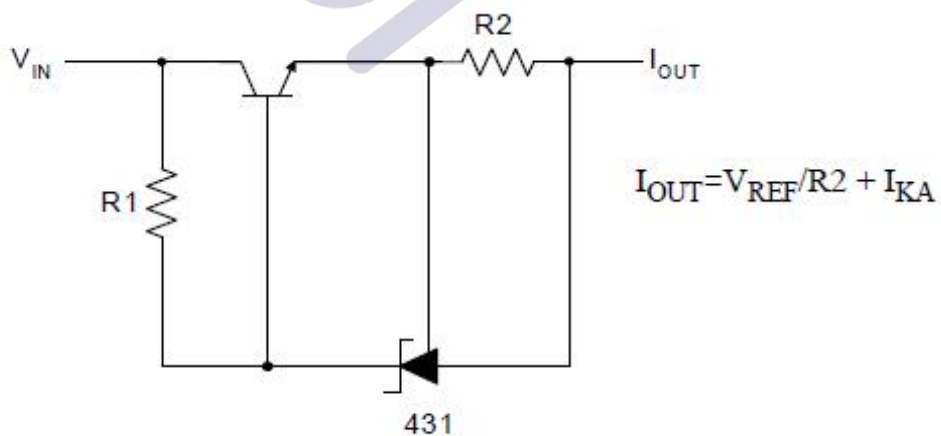

Current Source or Current Limit

Functional Block Diagram

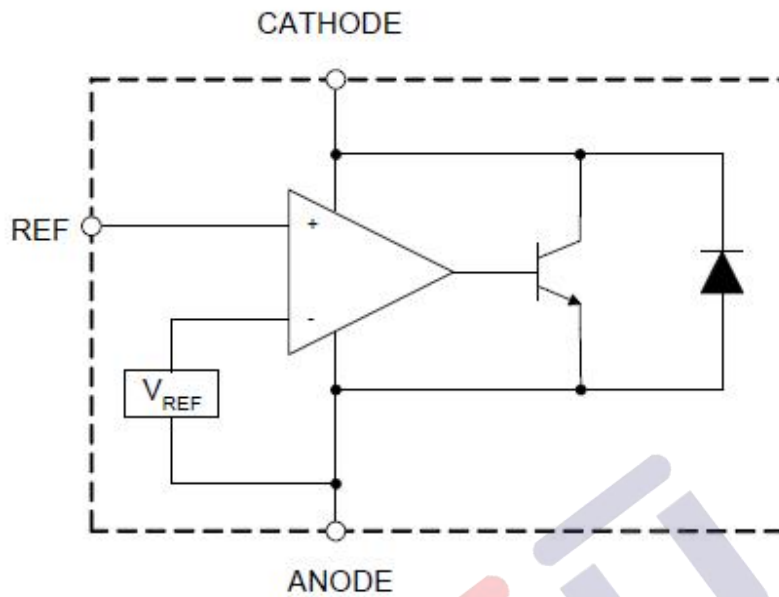

Absolute Maximum Ratings (Note 5)

Symbol	Parameter	Rating	Unit
V_{KA}	Cathode Voltage	40	V
I_{KA}	Cathode Current Range (Continuous)	-100 to 150	mA
I_{REF}	Reference Input Current Range	10	mA
T_J	Junction Temperature	+150	°C
T_{STG}	Storage Temperature Range	-65 to +150	°C
ESD	ESD (Human Body Model)	3000	V

Note5: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.


Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{KA}	Cathode Voltage	V_{REF}	36	V
I_{KA}	Cathode Current	1.0	100	mA
T_A	Operating Ambient Temperature Range	-40	+125	°C


Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Symbol	Test Circuit	Parameter		Conditions		Min	Typ	Max	Unit
V _{REF}	4	Reference Voltage	±0.3% ±0.5%	V _{KA} =V _{REF} , I _{KA} =10mA		2.4925 2.4875	2.500	2.5075 2.5125	V
ΔV _{REF}	4	Deviation of Reference Voltage Over Full Temperature Range		V _{KA} = V _{REF} I _{KA} =10mA	0 to +70℃ -40 to +85℃ -40 to +125℃	— — —	4.5 4.5 4.5	8 10 16	mV
$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	5	Ratio of Change in Reference Voltage to the Change in Cathode Voltage		I _{KA} =10mA	ΔV _{KA} = 10V to V _{REF} ΔV _{KA} = 36V to 10V	— —	-1.0 -0.5	-2.7 -2.0	mV/V
I _{REF}	5	Reference Current		I _{KA} =10mA, R1=10KΩ, R2=∞		—	0.8	4	μA
ΔI _{REF}	5	Deviation of Reference Current Over Full Temperature Range		I _{KA} =10mA, R1=10KΩ R2=∞, T _A =-40 to +125℃		—	0.4	1.1	μA
I _{KA} (Min)	4	Minimum Cathode Current for Regulation		V _{KA} =V _{REF}		—	0.4	1.0	mA
I _{KA} (Off)	6	Off-state Cathode Current		V _{KA} =36V, V _{REF} =0		—	0.05	1.0	μA
Z _{KA}	4	Dynamic Impedance		V _{KA} =V _{REF} , I _{KA} =1 to 100mA, f ≤ 1.0KHz		—	0.15	0.5	Ω
θ _{JC}	—	Thermal Resistance		SOT-23		—	130	—	℃/W


Electrical Characteristics

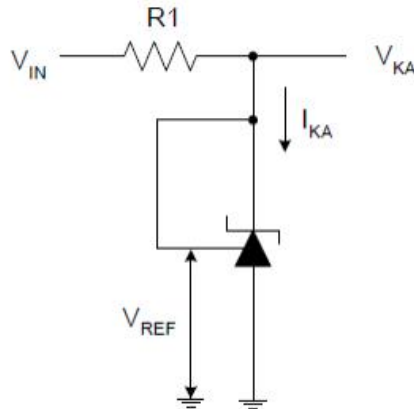

Test Circuit 4 for $V_{KA} = V_{REF}$

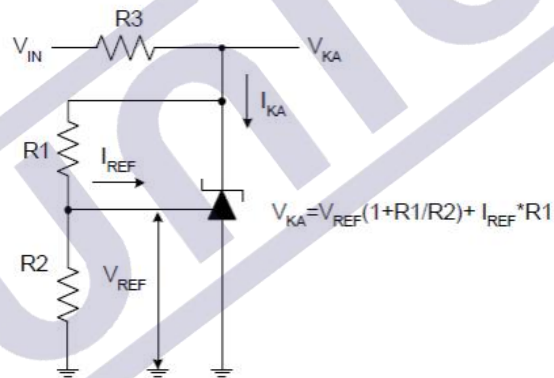


Test Circuit 5 for $V_{KA} > V_{REF}$

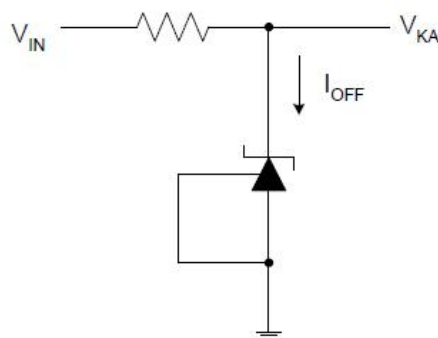


Test Circuit 6 for I_{OFF}

Performance Characteristics


Reference Voltage vs. Ambient Temperature

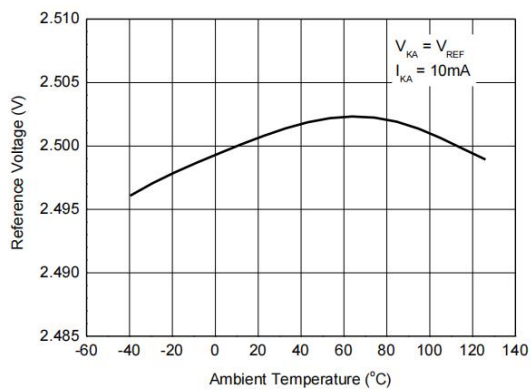


Reference Current vs. Ambient Temperature

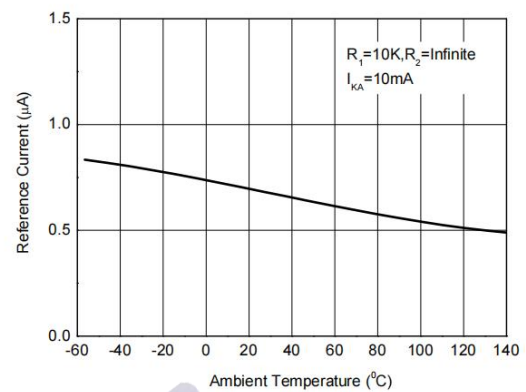


Cathode Current vs. Cathode Voltage

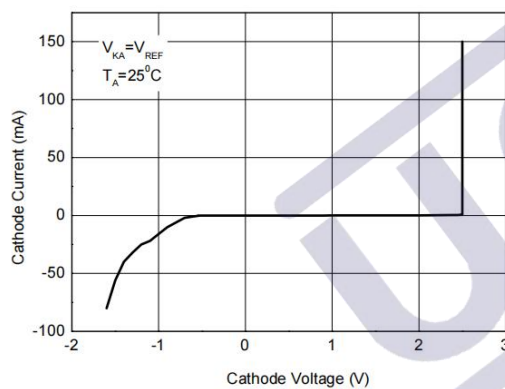


Cathode Current vs. Cathode Voltage

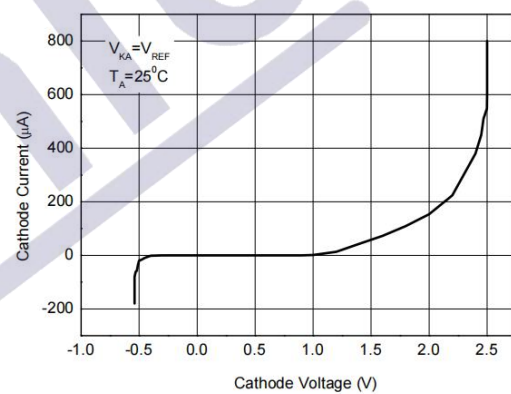

Off-State Cathode Current vs. Ambient Temperature


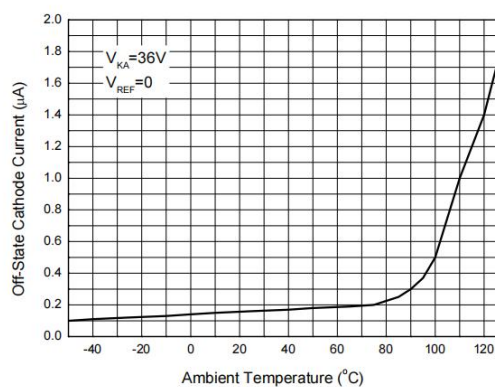


Ratio of Delta Reference Voltage to the Ratio of Delta Cathode Voltage


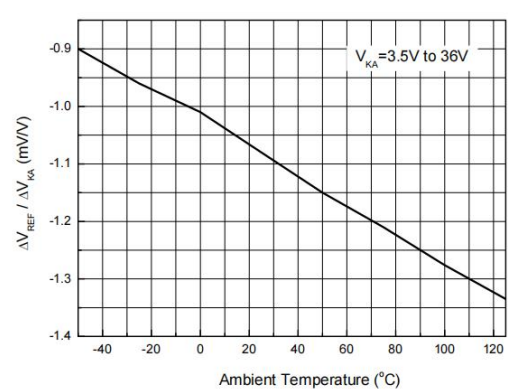


Performance Characteristics (Cont.)



Small Signal Voltage Gain vs. Frequency

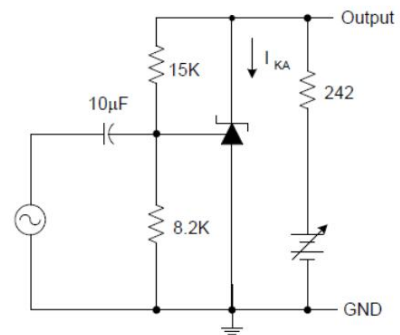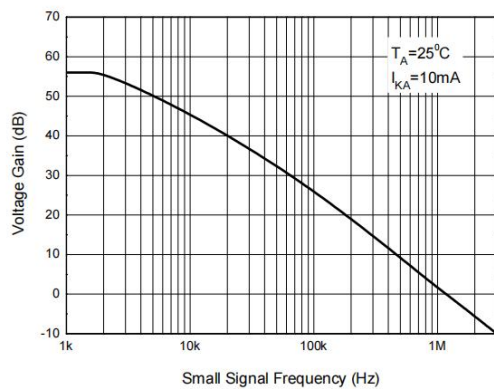

Reference Impedance vs. Frequency

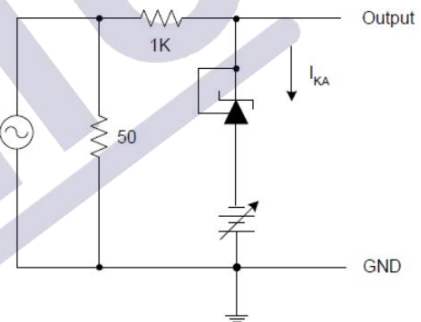
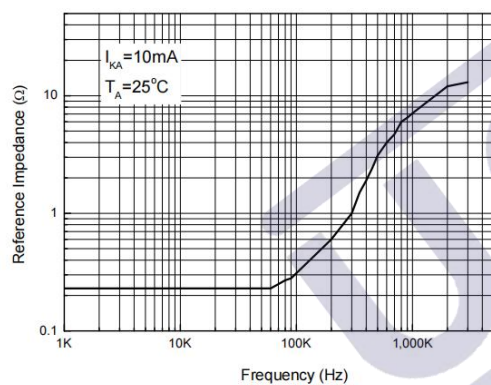


Stability Boundary Conditions vs. Load Capacitance

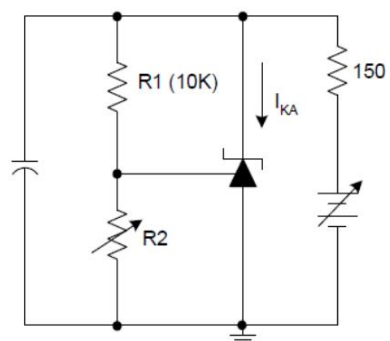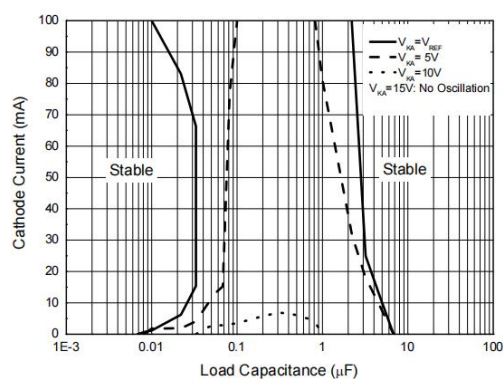


Performance Characteristics (Cont.)

Pulse Response of Input and Output Voltage

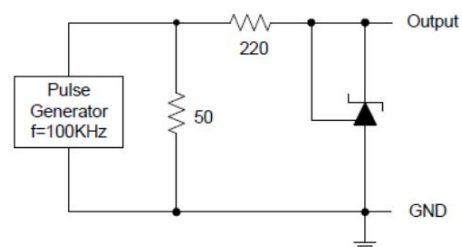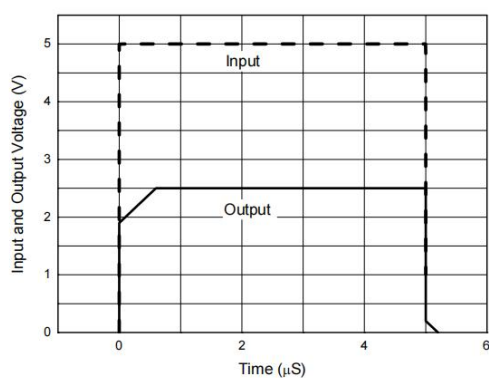

Package Outline Dimensions

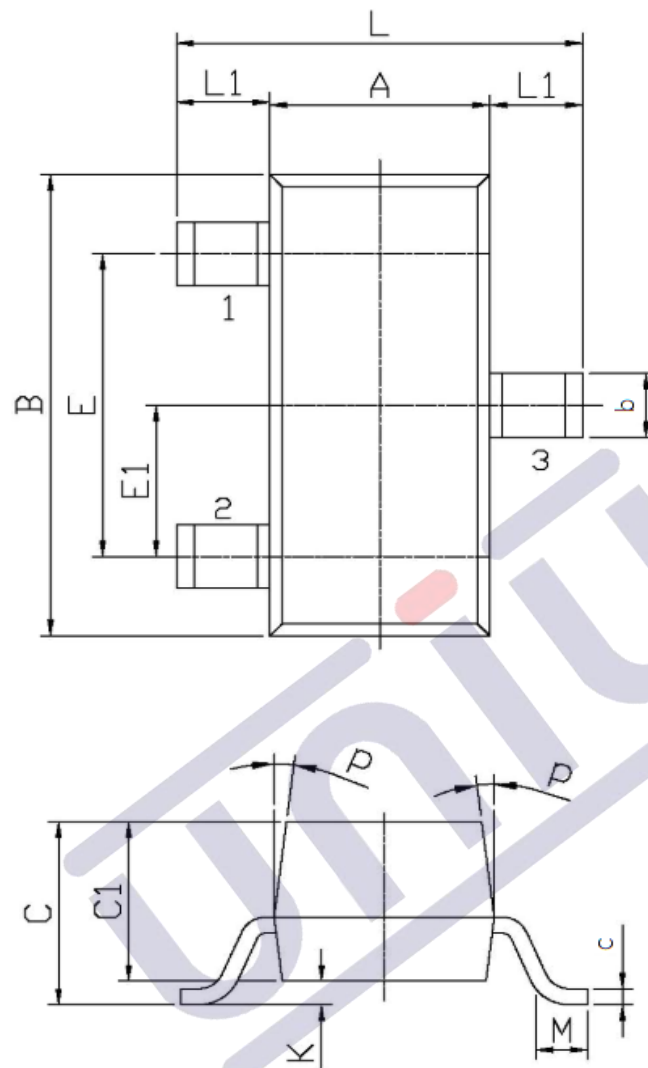

SOT-23

単位 : mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20MIN	
E1	0.85	1.05	P	7 °	
b	0.35	0.55			

1、版本记录

DATE	REV.	DESCRIPTION
2018/04/19	1.0	首次发布
2020/05/21	1.1	布局调整
2023/09/15	1.2	免责声明更新
2024/09/25	1.3	修正封装
2025/02/19	1.4	精度提升至0.3%

2、联系我们

浙江宇力微新能源科技有限公司

总部地址：绍兴市越城区斗门街道袍渎路25号中节能科创园45幢4/5楼

电话：0575-85087896（研发部）

传真：0575-88125157

E-mail:htw@uni-semic.com

无锡地址：江苏省无锡市锡山区先锋中路6号中国电子（无锡）数字芯城1#综合楼503室

电话:0510-85297939

E-mail:zh@uni-semic.com

深圳地址：深圳市宝安区西乡街道南昌社区宝源路泳辉国际商务大厦410

电话：0755-84510976

E-mail:htw@uni-semic.com

重要注意事项:

- 1、绍兴宇力半导体有限公司和浙江宇力微新能源科技有限公司，简称“宇力”，宇力保留说明书、应用指导书等的更改权，不另行通知。客户在采购时应获取我司最新版本资料，并验证相关信息是否最新和完整。产品使用前请仔细阅读本说明书、应用指导书等相关资料和其中的注意事项。
- 2、本产品属于消费类电子产品，宇力对宇力产品的任何特定用途的适用性不做任何保证。产品也不得应用在被任何适用法律或法规禁止制造、使用或销售的任何设备或系统中。如果宇力的产品被用禁止产品或系统中，此类应用产品的全部风险由客户自行承担，宇力对此不承担任何责任。
- 3、本文件和产品的应用指导书等相关资料所描述的产品的应用仅用于说明参考，本文件提供的参数在不同应用中可能而且确实会有所不同，实际性能可能会随之变化。使用时需要进一步评估、测试和验证。宇力对产品应用或客户产品设计等方面的任何协助不承担责任。
- 4、客户须在产品的有效存储期内使用完毕，客户如对宇力产品的有效存储期有任何疑问的，请即时联系宇力对接销售人员或宇力客户服务支持，对于超过存储期使用的，宇力不承担任何责任。
- 5、未经宇力事先书面同意，不得对文件和产品进行拆解、更改、修改或者复制。
- 6、购买产品时请认清宇力商标和物料名称，如有疑问请联系宇力。第三方购买请注意是否为宇力授权的资质，同时在采购之前联系我司，以确认产品为宇力原厂正品。
- 7、客户在应用和使用产品时请务必遵守相关法规，包括但不限于贸易管制法规等。本产品为民用电子产品，请勿应用于非民用领域。
- 8、产品提升永无止境，我公司将竭诚为客户提供更优秀的产品!