

## 1. Description

The AOZ8S303BLS-24(ES) is an ultra-low capacitance TVS (Transient Voltage Suppressor) designed to protect high speed data interfaces. It has been specifically designed to protect sensitive electronic components which are connected to data and transmission lines from over-stress caused by ESD (Electrostatic Discharge). The AOZ8S303BLS-24(ES) may be used to provide ESD protection up to  $\pm 10\text{kV}$  (contact discharge) according to IEC61000-4-2, and withstand peak pulse current up to 4.0A (8/20 $\mu\text{s}$ ) according to IEC61000-4-5.

---

## 2. Features

- IEC 61000-4-2 Level 4 ESD Protection
  - $\pm 10\text{kV}$  Contact Discharge
  - $\pm 10\text{kV}$  Air Discharge
- 30W Peak pulse Power (8/20 $\mu\text{s}$ )
- Low clamping voltage
- Working voltage: 24V
- Low leakage current
- RoHS compliant
- Protecting one bi-directional line
- Low Junction capacitance: 0.10pF Typ.

---

## 3. Applications

- High-speed interfaces
- HDMI and USB 3.2
- Cellular handsets and accessories
- Portable Electronics and Notebooks
- TVs and monitors
- Digital cameras

---

## 4. Ordering Information

| Part Number        | Package    | Marking | Material     | Packing     | Quantity per reel | Flammability Rating | Reel Size |
|--------------------|------------|---------|--------------|-------------|-------------------|---------------------|-----------|
| AOZ8S303BLS-24(ES) | DFN0603-2L | HBA     | Halogen free | Tape & Reel | 10,000 PCS        | UL 94V-0            | 7 inches  |

Table-1 Ordering information

## 5. Pin Configuration and Functions


| Pin | Name | Description   | Outline  | Circuit Diagram   |
|-----|------|---------------|--|---|
| 1   | IO   | Connect to IO |  |  |
| 2   | IO   | Connect to IO |  |   |

Table-2 Pin configuration

## 6. Specification

### 6.1. Absolute Maximum rating

Over operating free-air temperature range (unless otherwise noted)

| Parameters                                 | Symbol    | Min. | Max.     | Unit |
|--|-----------|------|----------|------|
| Peak pulse power (tp=8/20us)@25°C          | $P_{pk}$  | -    | 30       | W    |
| Peak pulse current (tp=8/20us)@25°C        | $I_{PP}$  |      | 4.0      | A    |
| ESD (IEC61000-4-2 air discharge) @25°C     | $V_{ESD}$ | -    | $\pm 10$ | kV   |
| ESD (IEC61000-4-2 contact discharge) @25°C | $V_{ESD}$ | -    | $\pm 10$ | kV   |
| Junction temperature                       | $T_J$     | -    | 150      | °C   |
| Operating temperature                      | $T_{OP}$  | -50  | 125      | °C   |
| Storage temperature                        | $T_{STG}$ | -55  | 150      | °C   |
| Lead temperature                           | $T_L$     | -    | 260      | °C   |

Table-3 Absolute Maximum rating


## 6.2. Electrical Characteristics

At  $T_A = 25^\circ C$  unless otherwise noted


| Parameter                 | Symbol    | Conditions   | Min. | Typ. | Max. | Units |
|---------------------------|-----------|--|------|------|------|-------|
| Reverse Stand-off Voltage | $V_{RWM}$ |  |      |      | 24   | V     |
| Reverse Breakdown Voltage | $V_{BR}$  | $I_T=1\text{mA}$   | 25   | 36   |      | V     |
| Reverse Leakage Current   | $I_R$     | $V_{RWM}=24.0\text{V}$                                     |      |      | 100  | nA    |
| Clamping Voltage          | $V_C$     | $I_{PP}=1.5\text{A}; tp=8/20\mu\text{s};$<br>内阻 $42\Omega$ |      | 4.0  |      | V     |
| Clamping Voltage          | $V_C$     | $I_{PP}=4.0\text{A}; tp=8/20\mu\text{s};$<br>内阻 $12\Omega$ |      | 5.6  |      | V     |
| Junction Capacitance      | $C_J$     | $V_R=0\text{V}; f=1\text{MHz}$                             |      | 0.10 | 0.20 | pF    |

Table-4 Electrical Characteristics


| Symbol     | Parameters                |
|------------|---------------------------|
| $V_{RWM}$  | Reverse stand-off voltage |
| $I_R$      | Reverse leakage current   |
| $V_{BR}$   | Reverse breakdown voltage |
| $I_{BR}$   | Reverse breakdown current |
| $V_{CL}$   | Clamping voltage          |
| $V_{TRIG}$ | Reverse trigger voltage   |
| $I_{TRIG}$ | Reverse trigger current   |
| $V_{HOLD}$ | Reverse holding voltage   |
| $I_{HOLD}$ | Reverse holding current   |
| $I_{PP}$   | Peak pulse current        |

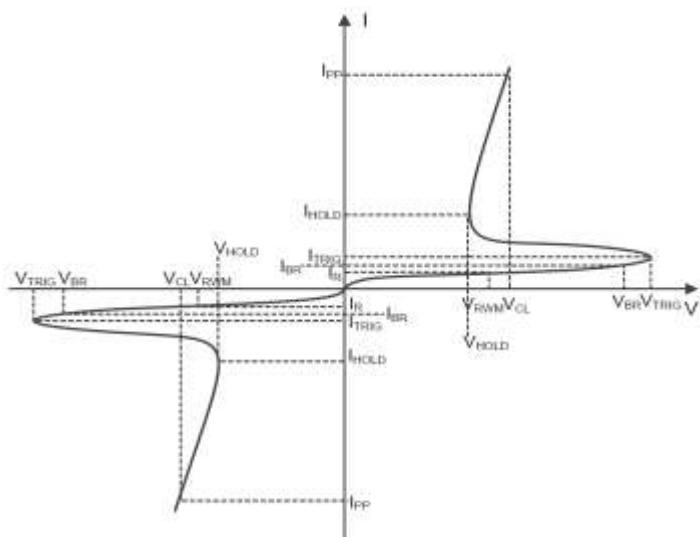




## 7. Typical Characteristic

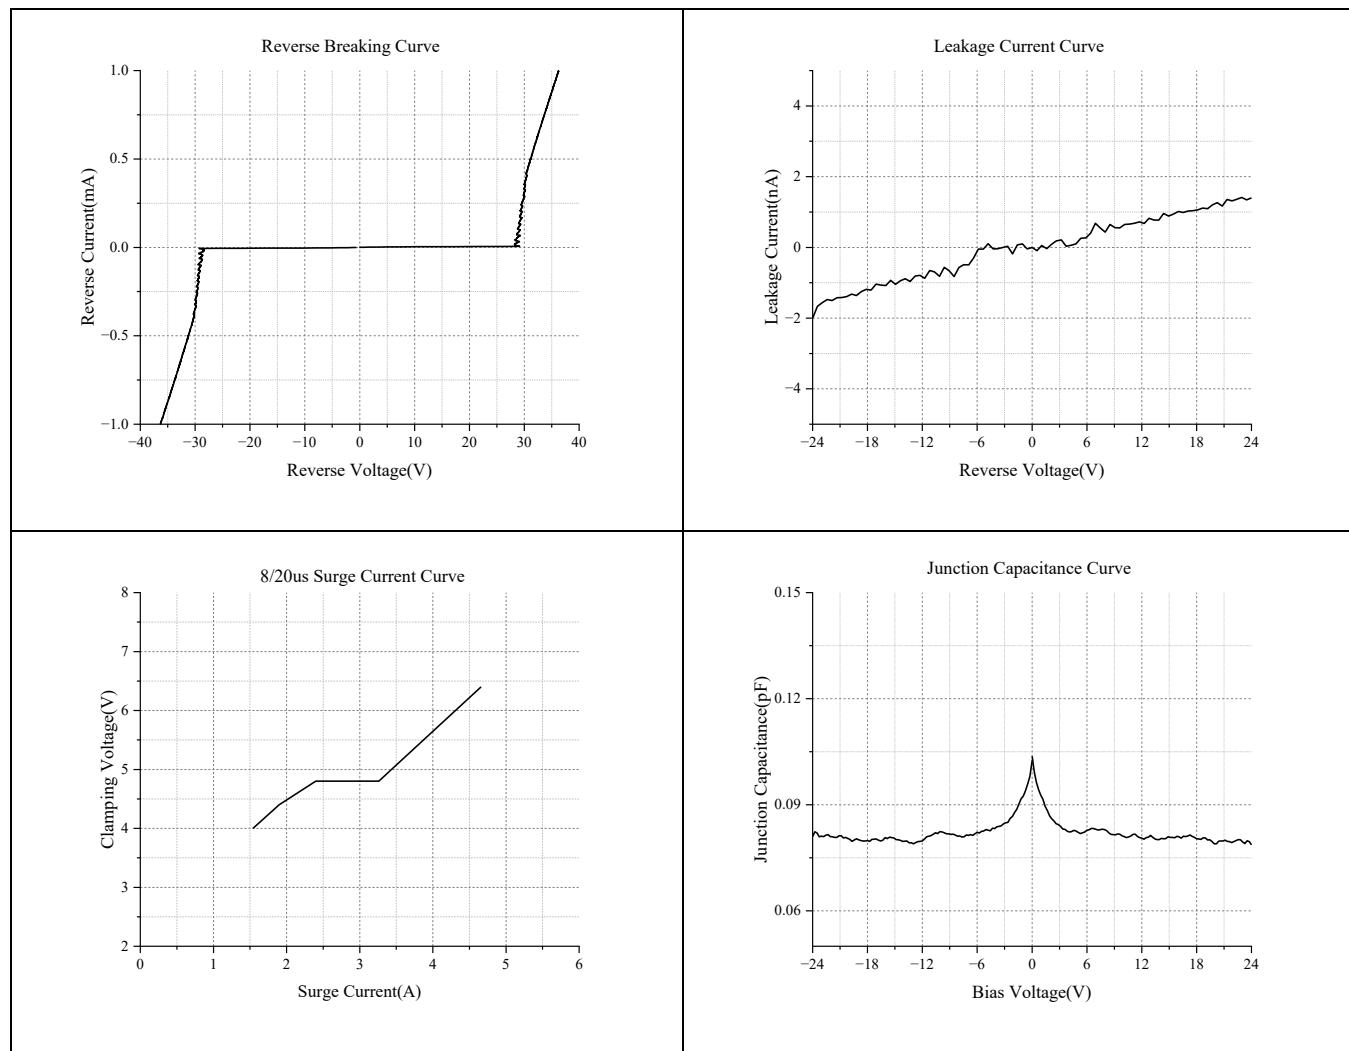

### Measurement Wave According to IEC Standard

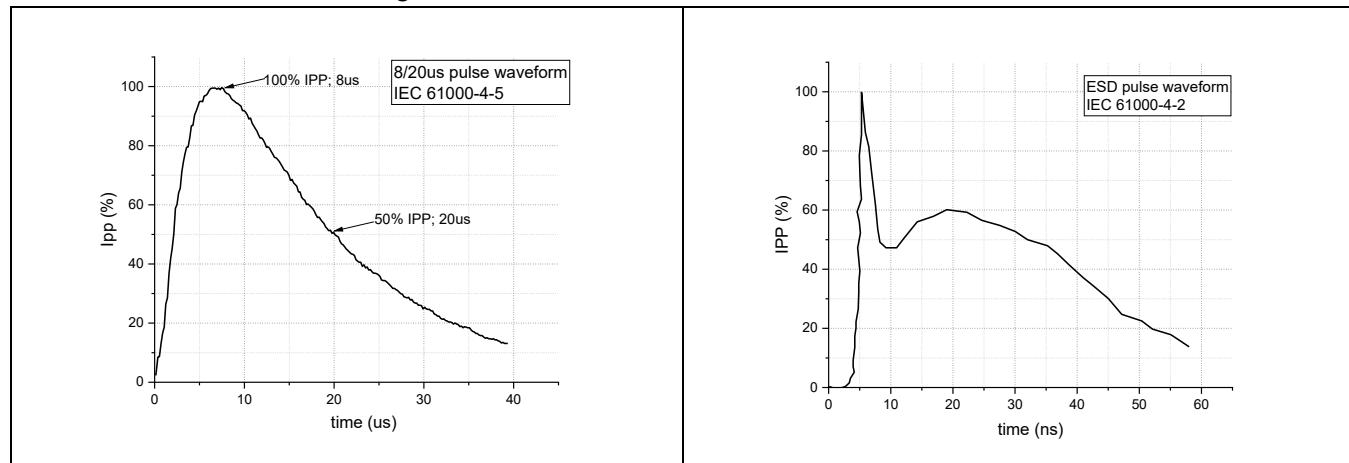


## 8. Dimension

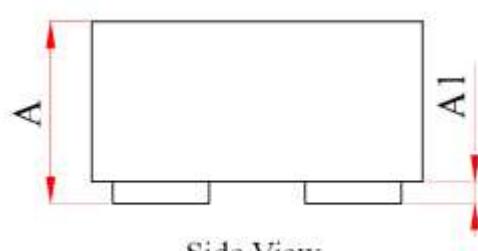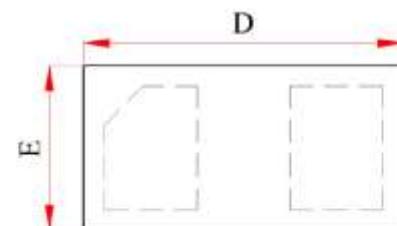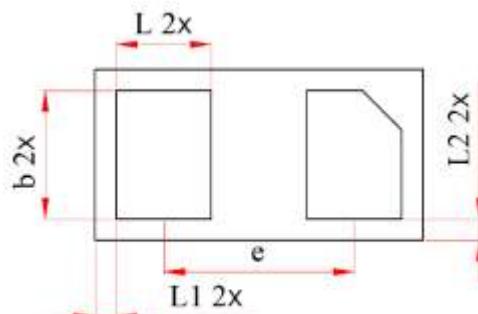

| Symbol | Dimension In Millimeters |       |       | Dimension In Inches |       |       |
|--------|--------------------------|-------|-------|---------------------|-------|-------|
|        | Normal                   | Min   | Max   | Normal              | Min   | Max   |
| A      | --                       | 0.280 | 0.340 | --                  | 0.011 | 0.013 |
| A1     | --                       | --    | 0.050 | --                  | --    | 0.002 |
| D      | 0.620                    | 0.590 | 0.640 | 0.024               | 0.023 | 0.025 |
| E      | 0.320                    | 0.290 | 0.340 | 0.013               | 0.011 | 0.013 |
| b      | 0.240                    | 0.215 | 0.265 | 0.009               | 0.008 | 0.010 |
| L      | 0.180                    | 0.155 | 0.205 | 0.007               | 0.006 | 0.008 |
| L1     | 0.040 REF                |       |       | 0.002 REF           |       |       |
| L2     | 0.040 REF                |       |       | 0.002 REF           |       |       |
| e      | 0.360 BSC                |       |       | 0.014 BSC           |       |       |

## 9. Recommended Soldering Footprint

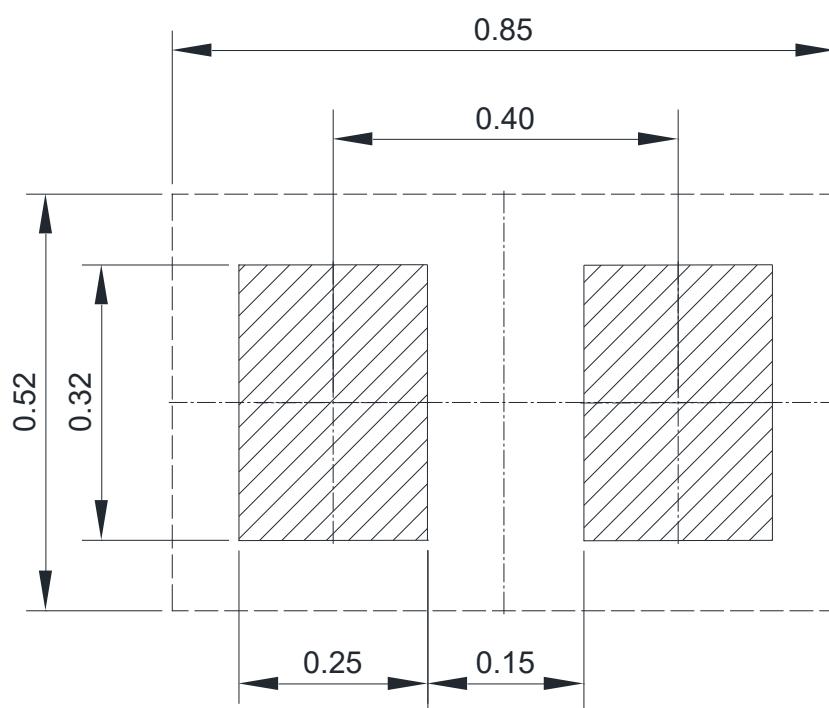

## **DISCLAIMER**

ELECSUPER PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with ElecSuper products. You are solely responsible for

- (1) selecting the appropriate ElecSuper products for your application;
- (2) designing, validating and testing your application;
- (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements.

These resources are subject to change without notice. ElecSuper grants you permission to use these resources only for development of an application that uses the ElecSuper products described in the resource. Other reproduction and display of these resources are prohibited. No license is granted to any other ElecSuper intellectual property right or to any third party intellectual property right. ElecSuper disclaims responsibility for, and you will fully indemnify ElecSuper and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources. ElecSuper's products are provided subject to ElecSuper's Terms of Sale or other applicable terms available either on [www.elecsuper.com](http://www.elecsuper.com) or provided in conjunction with such ElecSuper products. ElecSuper's provision of these resources does not expand or otherwise alter ElecSuper's applicable warranties or warranty disclaimers for ElecSuper products.