

SOT-363 Plastic-Encapsulate Transistors

MMBT5551DW DUAL TRANSISTOR (NPN+NPN)


FEATURES

- Complementary to MMBT5401DW
- Small Surface Mount Package
- Ideal for Medium Power Amplification and Switching

MARKING:G1

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	180	V
V_{CEO}	Collector-Emitter Voltage	160	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current	600	mA
P_C	Collector Power Dissipation	300	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	625	$^{\circ}\text{C/W}$
T_J	Junction Temperature	150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature	-55~+150	$^{\circ}\text{C}$

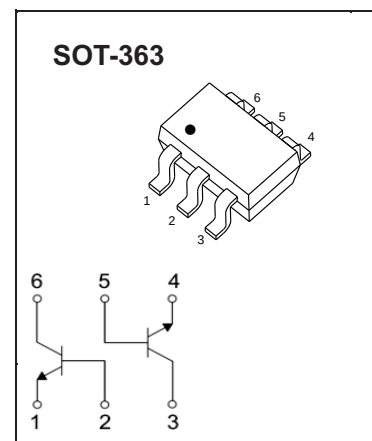

ELECTRICAL CHARACTERISTICS ($T_a=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}$, $I_E=0$	180			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C=1\text{mA}$, $I_B=0$	160			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu\text{A}$, $I_C=0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB}=120\text{V}$, $I_E=0$			50	nA
Emitter cut-off current	I_{EBO}	$V_{EB}=4\text{V}$, $I_C=0$			50	nA
DC current gain	h_{FE}	$V_{CE}=5\text{V}$, $I_C=1\text{mA}$	80			
		$V_{CE}=5\text{V}$, $I_C=10\text{mA}$	80		300	
		$V_{CE}=5\text{V}$, $I_C=50\text{mA}$	30			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=50\text{mA}$, $I_B=5\text{mA}$			0.2	V
		$I_C=10\text{mA}$, $I_B=1\text{mA}$			0.15	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=50\text{mA}$, $I_B=5\text{mA}$			1	V
		$I_C=10\text{mA}$, $I_B=1\text{mA}$			1	V
Transition frequency	f_T	$V_{CE}=10\text{V}$, $I_C=10\text{mA}$, $f=100\text{MHz}$	100		300	MHz
Collector output capacitance	C_{ob}	$V_{CB}=10\text{V}$, $I_E=0$, $f=1\text{MHz}$			6	pF

*Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycles $\leq 2.0\%$.

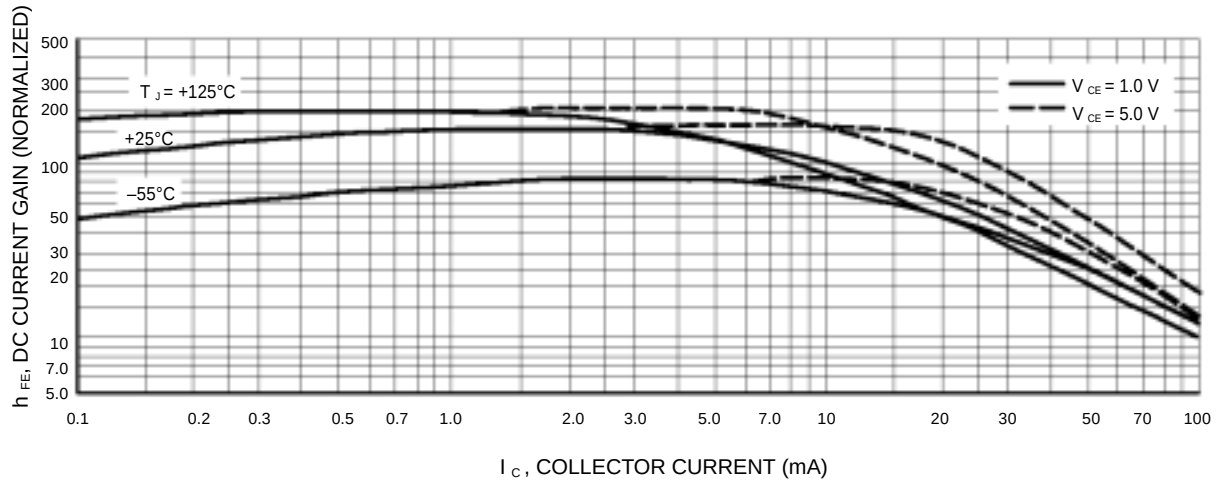


Figure 15. DC Current Gain

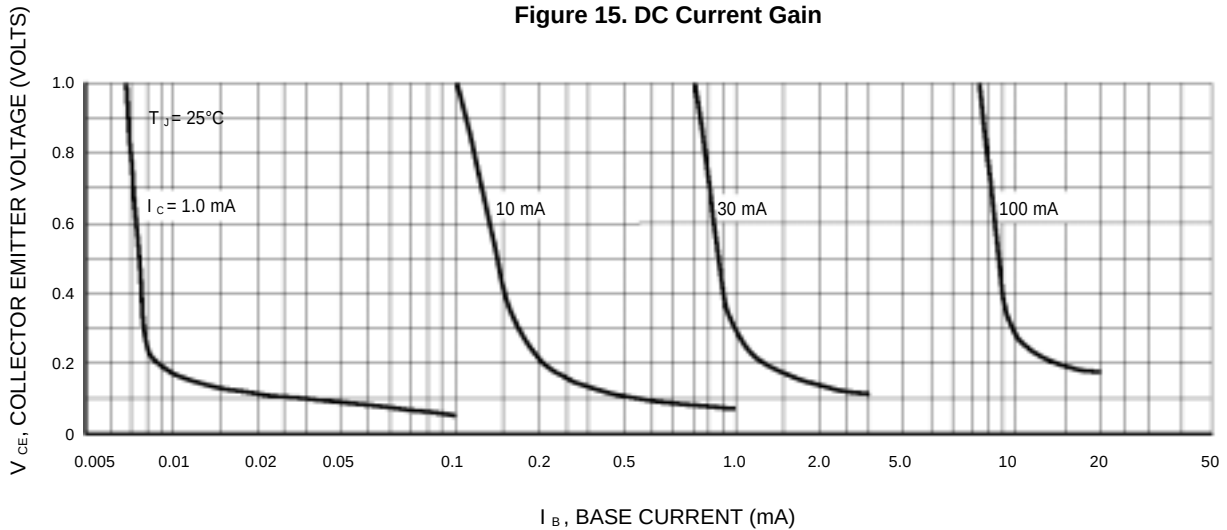


Figure 16. Collector Saturation Region

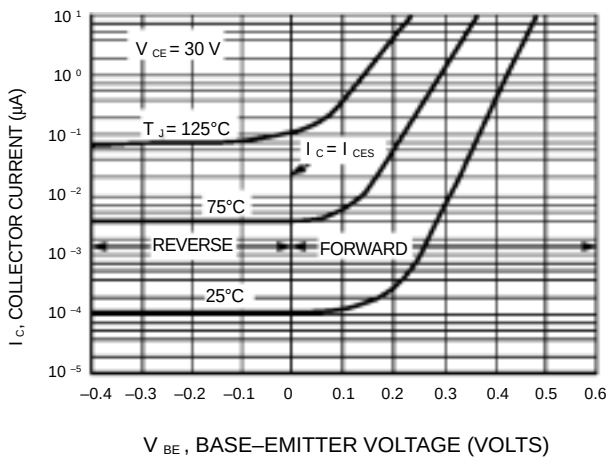


Figure 3. Collector Cut-Off Region

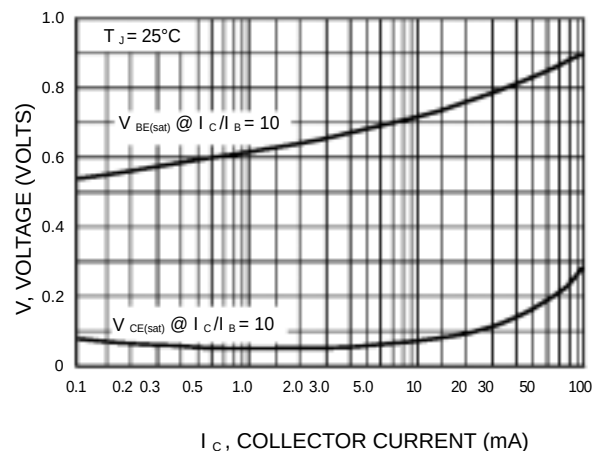


Figure 4. "On" Voltages


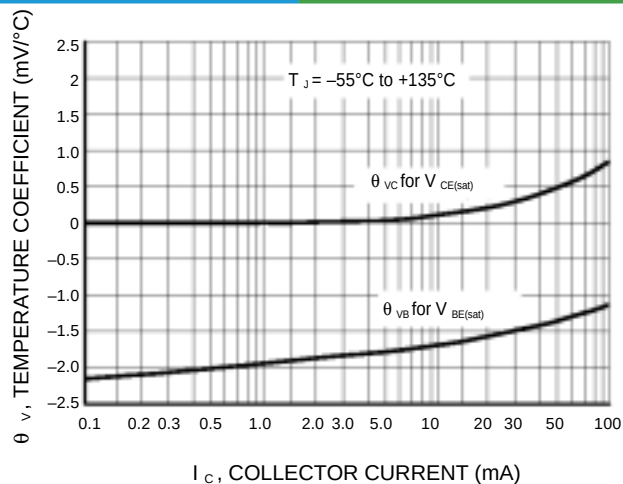


Figure 5. Temperature Coefficients

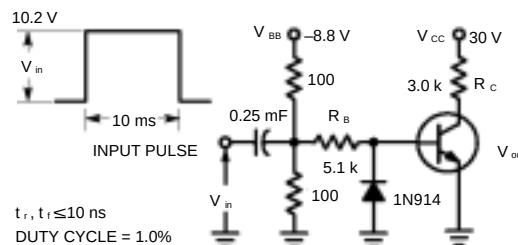

Values Shown are for $I_C @ 10 \text{ mA}$

Figure 6. Switching Time Test Circuit


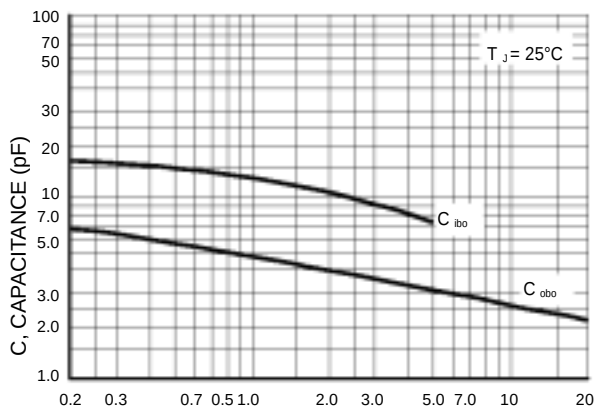


Figure 7. Capacitances

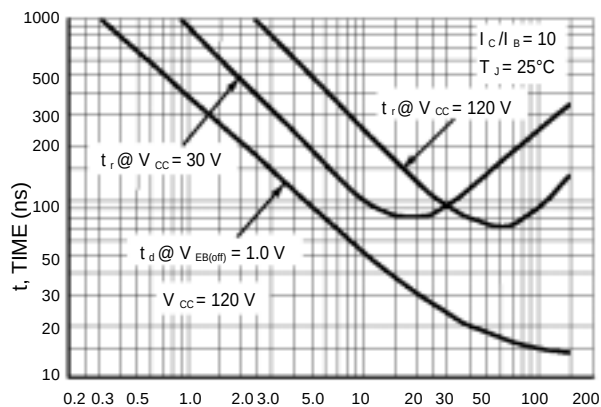

8. Turn-On Time

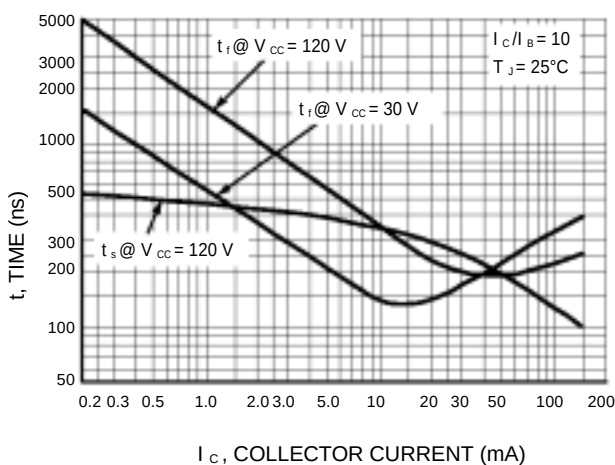


Figure 9. Turn-Off Time