

Features

- Wide supply voltage range from 0.8V to 3.6V
- Inputs accept voltages up to 3.6V
- I_{OFF} supports partial-power-down mode
- Low static power consumption; $I_{CC}=0.5\mu A$
- ESD Protection Exceeds JESD 22
 - 2000-V Human-Body Model (A114-A)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)


General Description

The 74AUP2G06DW-TP provides two inverting buffers with open-drain output. The output of the device is an open drain and can be connected to other open-drain outputs to implement active-LOW wired-OR or active-HIGH wired-AND functions.

Ordering Information

ORDER NUMBER	PACKAGE DESCRIPTION	PACKAGE OPTION
74AUP2G06DW-TP	SOT363	Tape and Reel, 3000

Pin Configuratio (TOP VIEW)

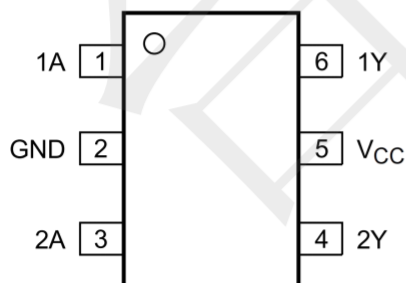


SOT363

Applications

- AV Receiver
- Audio Dock: Portable
- Blu-ray Player and Home Theater
- Embedded PC
- Personal Digital Assistant(PDA)
- Power: Telecom/Server AC/DC Supply: Single Controller: Analog and Digital
- Solid State Drive(SSD): Client and Enterprise
- Wireless Headset, Keyboard, and Mouse

Logic Diagram



Function Table (each gate)

Input	Output
nA	nY
L	Z
H	L

Note: H: HIGH voltage level; L: LOW voltage level;
Z: high impedance state.

Absolute Maximum Ratings

PARAMETER	SYMBOL	CONDITIONS	RATINGS	UNIT
Supply Voltage	V _{CC}		-0.5 ~ +4.6	V
Input Voltage	V _{IN}		-0.5 ~ +4.6	V
Output Voltage	V _{OUT}	Output in the high or low state	-0.5 ~ +V _{CC} +0.5V	V
		Output in the power-off state	-0.5 ~ +4.6	V
V _{CC} or GND Current	I _{CC}		±50	mA
Continuous Output Current	I _{OUT}	V _{OUT} =0~V _{CC}	±20	mA
Input Clamp Current	I _{IK}	V _{IN} <0	-50	mA
Output Clamp Current	I _{OK}	V _{OUT} <0	-50	mA
Storage Temperature Range	T _{STG}		-65 ~ +150	°C
Junction to Ambient	θ _{JA}	SOT363	280	°C/W

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Recommended Operating Conditions

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V _{CC}	Operating	0.8	--	3.6	V
Input Voltage	V _{IN}		0	--	3.6	V
Output Voltage	V _{OUT}	High or low state	0	--	3.6	V
Input Transition Rise or Fall Rate	Δt/Δv	V _{CC} =0.8V ~ 3.6V	--	--	200	ns/V
Operating Temperature	T _A		-40	--	+125	°C

Electrical Characteristics (T_A=25°C ,unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-level Input Voltage	V _{IH}	V _{CC} =0.8V	0.7×V _{CC}	--	--	V
		V _{CC} =0.9V ~ 1.95V	0.65×V _{CC}	--	--	V
		V _{CC} =2.3V ~ 2.7V	1.6	--	--	V
		V _{CC} =3V ~ 3.6V	2	--	--	V
Low-level Input Voltage	V _{IL}	V _{CC} =0.8V	--	--	0.3×V _{CC}	V
		V _{CC} =1.1V ~ 1.95V	--	--	0.35×V _{CC}	V
		V _{CC} =2.3V ~ 2.7V	--	--	0.7	V
		V _{CC} =3V ~ 3.6V	--	--	0.9	V
Low-Level Output Voltage	V _{OL}	V _{CC} =0.8 ~ 3.6V, I _{OL} =20μA	--	--	0.1	V
		V _{CC} =1.1V, I _{OL} =1.1mA	--	--	0.3×V _{CC}	V
		V _{CC} =1.4V, I _{OL} =1.7mA	--	--	0.31	V
		V _{CC} =1.65V, I _{OL} =1.9mA	--	--	0.31	V
		V _{CC} =2.3V	I _{OL} =2.3mA	--	0.31	V
		V _{CC} =3V	I _{OL} =2.7mA	--	0.31	V
Input Leakage Current	I _{I(LEAK)}	V _{CC} =0 ~ 3.6V, V _{IN} =GND ~ 3.6V	--	--	±0.1	μA
Power OFF Leakage Current	I _{off}	V _{CC} =0 V, V _{IN} or V _{OUT} =0 ~ 3.6V	--	--	±0.2	μA
Additional Power OFF Leakage Current	ΔI _{off}	V _{CC} =0 V~0.2V, V _{IN} or V _{OUT} =0 ~ 3.6V	--	--	±0.2	μA
Quiescent Supply Current	I _{CC}	V _{CC} =0.8 ~ 3.6V, V _{IN} =V _{CC} or GND, I _{OUT} =0	--	--	0.5	μA
Additional Quiescent Supply Current Per Input Pin	ΔI _{CC}	V _{CC} =3.3 V, V _{IN} =V _{CC} -0.6V, I _{OUT} =0	--	--	40	μA
Input Capacitance	C _I	V _{CC} =0V-3.6V, V _{IN} =V _{CC} or GND	--	0.8	--	pF
Output Capacitance	C _{OUT}	V _{CC} =0V, V _{OUT} =GND	--	1.7	--	pF


OPERATING CHARACTERISTICS (f=10MHz, TA =25°C , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C _{PD}	V _{CC} =0.8V	--	0.5	--	pF
		V _{CC} =1.2±0.1V	--	0.6	--	pF
		V _{CC} =1.5±0.1V	--	0.7	--	pF
		V _{CC} =1.8±0.15V	--	0.7	--	pF
		V _{CC} =2.5±0.2V	--	1.0	--	pF
		V _{CC} =3.3±0.3V	--	1.2	--	pF



SWITCHING CHARACTERISTICS (TA =25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Propagation delay from inputs (A) to output(Y)	t _{PD}	CL=5pF, RL=5KΩ	V _{CC} =0.8V	--	12.8	--	ns
			V _{CC} =1.2V±0.1V	2.3	4.3	--	ns
			V _{CC} =1.5V±0.1V	1.8	3.6	--	ns
			V _{CC} =1.8V±0.15V	1.5	3.1	--	ns
			V _{CC} =2.5V±0.2V	1.2	2.2	--	ns
			V _{CC} =3.3V±0.3V	1.1	2.2	--	ns
		CL=10pF, RL=5KΩ	V _{CC} =0.8V	--	15.8	--	ns
			V _{CC} =1.2V±0.1V	2.7	6.2	--	ns
			V _{CC} =1.5V±0.1V	2.2	4.4	--	ns
			V _{CC} =1.8V±0.15V	1.9	3.9	--	ns
			V _{CC} =2.5V±0.2V	1.7	2.8	--	ns
			V _{CC} =3.3V±0.3V	1.6	3.2	--	ns
		CL=15pF, RL=5KΩ	V _{CC} =0.8V	--	18.8	--	ns
			V _{CC} =1.2V±0.1V	3.2	7.3	--	ns
			V _{CC} =1.5V±0.1V	2.6	5.2	--	ns
			V _{CC} =1.8V±0.15V	2.3	4.8	--	ns
			V _{CC} =2.5V±0.2V	2.1	3.4	--	ns
			V _{CC} =3.3V±0.3V	2.0	4.0	--	ns
		CL=30pF, RL=5KΩ	V _{CC} =0.8V	--	27.8	--	ns
			V _{CC} =1.2V±0.1V	4.4	10.7	--	ns
			V _{CC} =1.5V±0.1V	3.6	7.7	--	ns
			V _{CC} =1.8V±0.15V	3.2	7.5	--	ns
			V _{CC} =2.5V±0.2V	2.9	5.3	--	ns
			V _{CC} =3.3V±0.3V	2.9	6.5	--	ns

TEST CIRCUIT AND WAVEFORMS

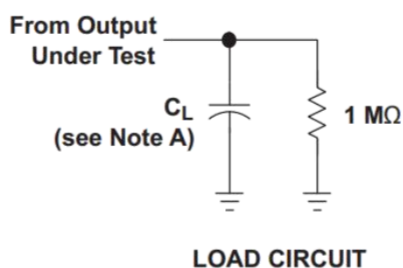


	$V_{CC} = 0.8 \text{ V}$	$V_{CC} = 1.2 \text{ V}$ $\pm 0.1 \text{ V}$	$V_{CC} = 1.5 \text{ V}$ $\pm 0.1 \text{ V}$	$V_{CC} = 1.8 \text{ V}$ $\pm 0.15 \text{ V}$	$V_{CC} = 2.5 \text{ V}$ $\pm 0.2 \text{ V}$	$V_{CC} = 3.3 \text{ V}$ $\pm 0.3 \text{ V}$
C_L	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF	5, 10, 15, 30 pF
V_M	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$	$V_{CC}/2$
V_I	V_{CC}	V_{CC}	V_{CC}	V_{CC}	V_{CC}	V_{CC}

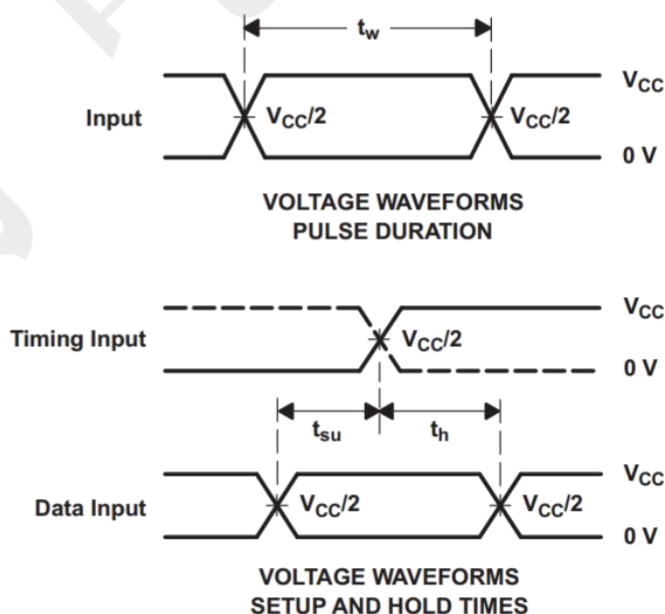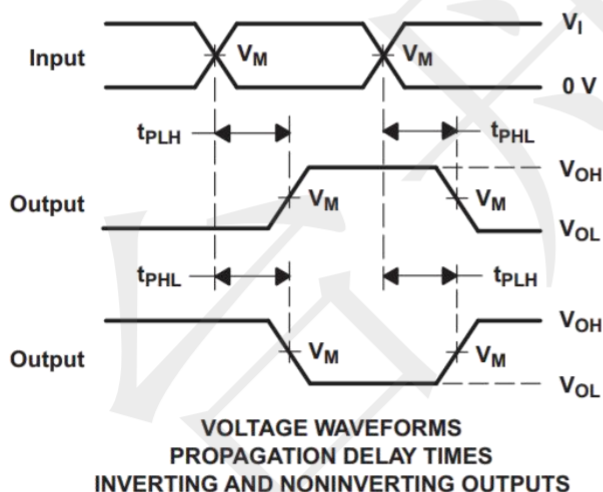

- C_L includes probe and jig capacitance.
- Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, for propagation delays $t_r/t_f = 3 \text{ ns}$, for setup and hold times and pulse width $t_r/t_f = 1.2 \text{ ns}$.
- The outputs are measured one at a time, with one transition per measurement.
- t_{PLH} and t_{PHL} are the same as t_{pd} .
- All parameters and waveforms are not applicable to all devices.

Package information (unit: mm)

SOT363

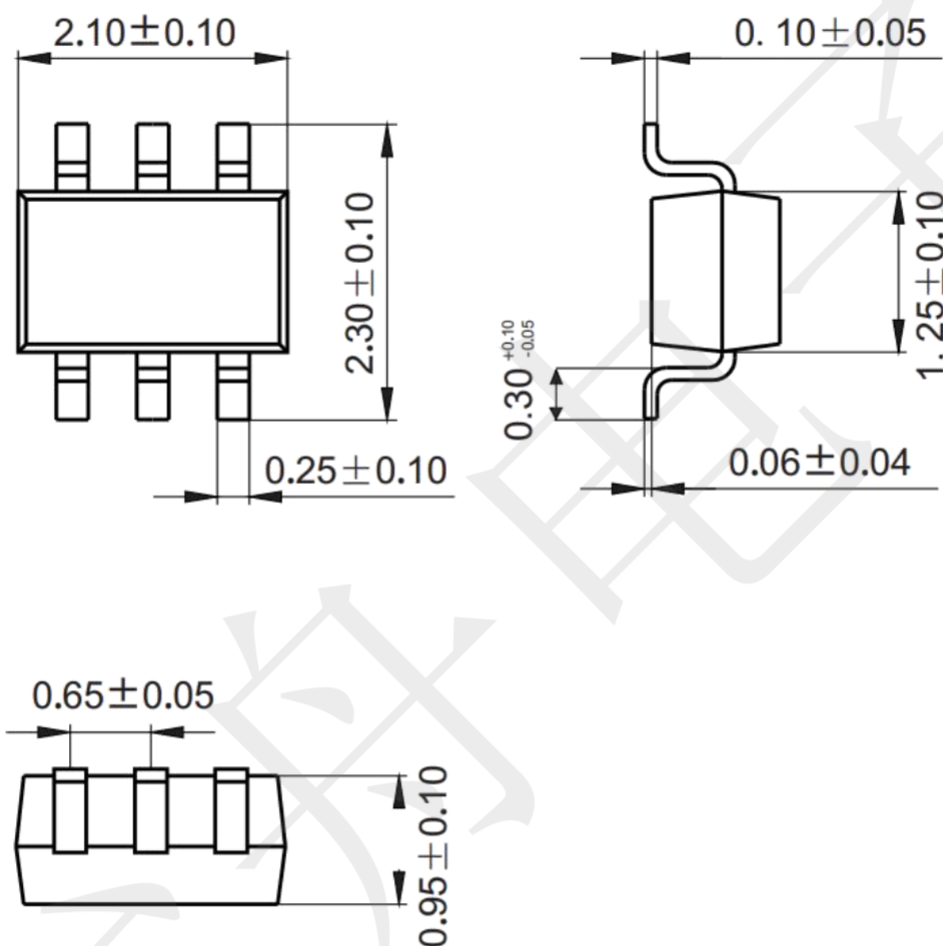

Mounting Pad Layout (unit: mm)

