


Differential Probe DP-235

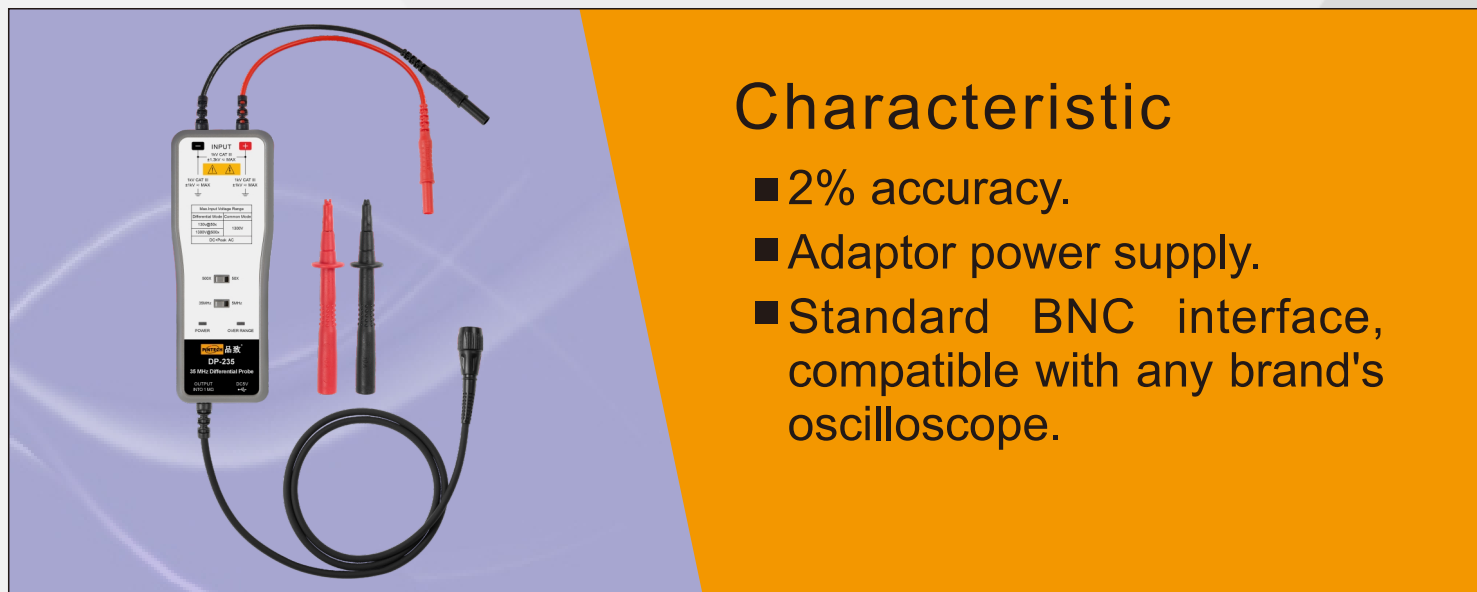

Characteristic

- 2% accuracy.
- Adaptor power supply.
- Standard BNC interface, compatible with any brand's oscilloscope.

Model	DP-235
Bandwidth(-3dB)	DC-35MHz
Attenuation Ratio	50X,500X
Accuracy	±2%
Rise Time	≥10ns
Input differential Vp-p	50X:260V; 500X:2600V
Input differential V AC RMS	919V
Input differential V DC	50X:130V; 500X:1300V
Common mode voltage(rms)	919V
Input Impedance	5MΩ//2pF(Single-ended); 10MΩ//1pF(Both ends)
Noise RMS	50X:≤100mV rms; 500X:≤350mV rms
5MHz Bandwidth limited	Switchable:Full/5MHz
Oscilloscope input impedance	1MΩ
Power adaptor	External 5V DC power supply
CMRR(Tyical)	60Hz:>80dB; 100Hz:>60dB; 1MHz:>50dB
Temperature	0~50°C
Humidity	10~85%RH
Weight	285g
Dimension(L*W*H)	175×68×28mm

● ACCESSORIES



Adapter



USB



BP-256N



BP-276N



BP-366A



BP-286N



Plug Adaptor

GUANGZHOU PINTECH CO.,LTD

Web:www.pintech.com.cn

Tel:020-82510899

E-mail:sales@pintech.com.cn

Main Products

Optical Isolated Voltage Probe, Differential probe, Oscilloscope probe, High voltage probe, High frequency current probe, Current probe, Digital high voltage meter, High voltage amplifier, Power amplifier, ESD generator, Function generator, Oscilloscope, Spectrum analyzer, multimeter, High voltage power supply, AC power supply, DC power supply and Power equipment instrument.