

SCHOTTKY BARRIER RECTIFIERS

Reverse Voltage - 30V Forward Current - 0.2A

FEATURES


- Low Forward Voltage Drop
- Fast Switching Time
- Surface Mount Package Ideally Suited for Automated Insertion
- Lead, Halogen and Antimony Free, RoHS Compliant "Green" Device

MECHANICAL DATA

- Case: SOD-123
 - Terminals: Solderable per MIL-STD-750, Method 2026
 - Approx. Weight: 16mg/0.00056oz
- Maximum Ratings and Electrical characteristics
Ratings at 25 °C ambient temperature unless otherwise specified.

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

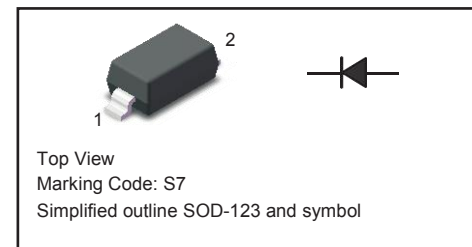

Parameter	Symbols	BAT42W	Units
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	30	V
RMS Reverse Voltage	$V_{R(RMS)}$	21	V
Forward Continuous Current (NOTE 1)	I_{FM}	0.2	A
Repetitive Peak Forward Current @t < 1.0s	I_{FRM}	500	mA
Non-Repetitive Peak Forward Surge Current @t < 10ms	I_{FSM}	4	A
Power dissipation	P_D	200	mW
Reverse Breakdown Voltage $I_R = 100\mu A$	V_{BR}	30	V
Forward Voltage (NOTE 2) $I_F = 10\text{ mA}$ $I_F = 50\text{ mA}$ $I_F = 200\text{ mA}$	V_F	0.40 0.65 1.0	V
Peak Reverse Current $V_{R1} = 25\text{ V}, T_j = 25^\circ\text{C}$ $V_{R2} = 25\text{ V}, T_j = 100^\circ\text{C}$	I_R	10 100	μA
Typical Junction Capacitance $V_R = 1\text{ V}, f = 1\text{ MHz}$	C_T	10	pF
Reverse Recovery Time $I_F = I_R = 10\text{ mA}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	t_{rr}	5	ns
Thermal Resistance, Junction to Ambient Air (NOTE 1)	$R_{\theta JA}$	500	$^\circ\text{C/W}$
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Part mounted on FR-4 board with recommended pad layout.
2. Short duration pulse test used to minimize self-heating effect.

Fig.1 Forward Current Derating Curve

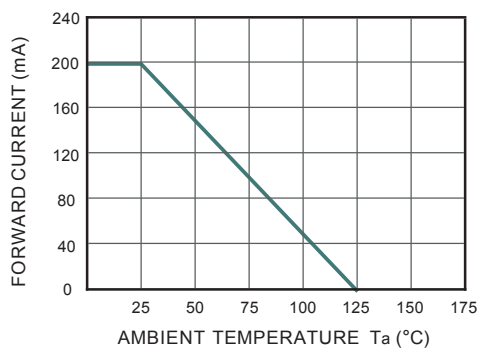


Fig.2 Typical Instaneous Reverse Characteristics

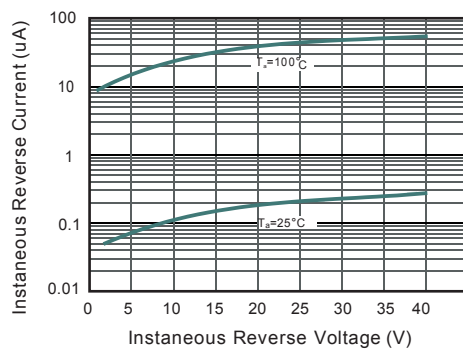


Fig.3 Typical Forward Characteristic


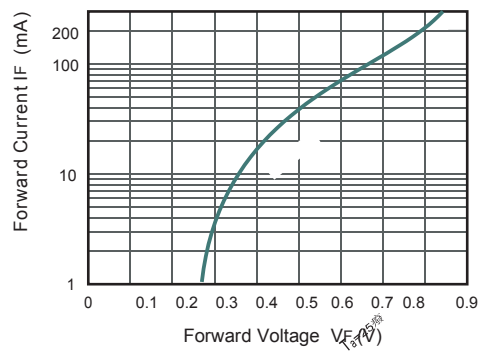



Fig.4 Typical Junction Capacitance

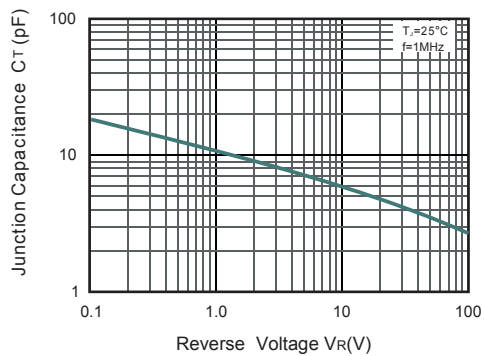

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads


SOD-123

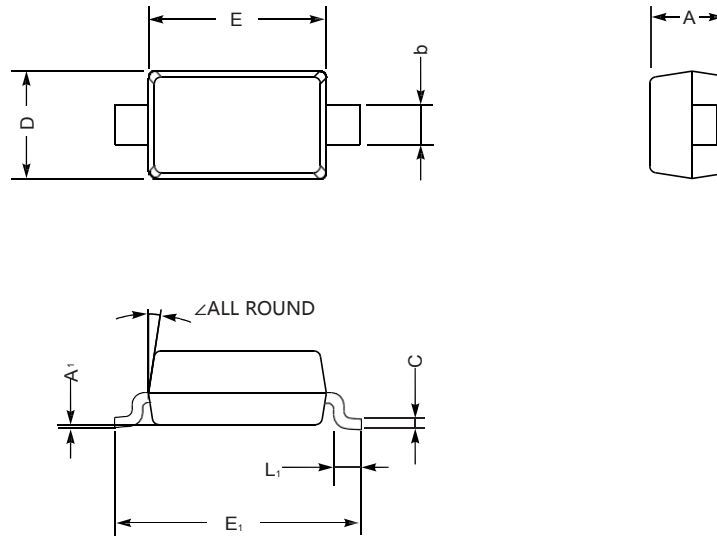

SOD-123 mechanical data

UNIT		A	C	D	E	E ₁	L ₁	b	A ₁	∠
mm	max	1.3	0.22	1.8	2.8	3.9	0.45	0.7	0.2	9°
	min	0.9	0.09	1.5	2.5	3.6	0.25	0.5	—	
mil	max	51	8.7	71	110	154	18	28	8	
	min	35	3.5	59	98	142	10	20	—	

The recommended mounting pad size

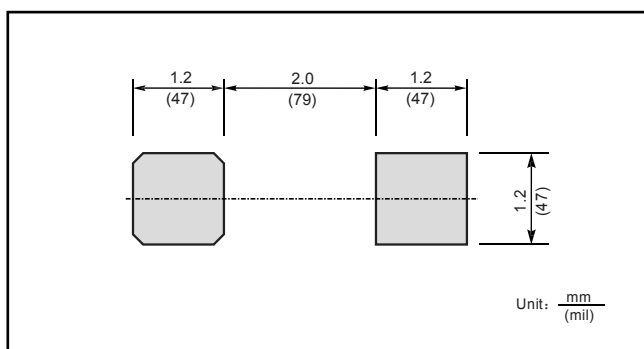

Marking

Type number	Marking code
BAT42W	S7