


SOT-23

FEATURES

- Epitaxial planar die construction
- Complementary PNP Type available(MMBT2907A)

1. BASE
2.EMITTER
3.COLLECTOR



MARKING: 1P




MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	75	V
V_{CEO}	Collector-Emitter Voltage	40	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	600	mA
P_C	Collector Dissipation	250	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	500	°C/W
T_J	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55to+150	°C

ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 10\mu A, I_E = 0$	75			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C = 10mA, I_B = 0$	40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu A, I_C = 0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB} = 60V, I_E = 0$			0.01	μA
Collector cut-off current	I_{CEX}	$V_{CE} = 30V, V_{BE(off)} = 3V$			0.01	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 3V, I_C = 0$			0.1	μA
DC current gain	$h_{FE(1)}^*$	$V_{CE} = 10V, I_C = 150mA$	100		300	
	$h_{FE(2)}^*$	$V_{CE} = 10V, I_C = 0.1mA$	40			
	$h_{FE(3)}^*$	$V_{CE} = 10V, I_C = 500mA$	42			
Collector-emitter saturation voltage	$V_{CE(sat)}^*$	$I_C = 500mA, I_B = 50mA$ $I_C = 150mA, I_B = 15mA$			1 0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}^*$	$I_C = 500mA, I_B = 50mA$ $I_C = 150mA, I_B = 15mA$			2.0 1.2	V
Transition frequency	f_T	$V_{CE} = 20V, I_C = 20mA,$ $f = 100MHz$	300			MHz
Delay time	t_d	$V_{CC} = 30V, V_{BE(off)} = -0.5V$ $I_C = 150mA, I_{B1} = 15mA$			10	nS
Rise time	t_r				25	nS
Storage time	t_s	$V_{CC} = 30V, I_C = 150mA$ $I_{B1} = -I_{B2} = 15mA$			225	nS
Fall time	t_f				60	nS

*pulse test: Pulse Width $\leq 300\mu s$, Duty Cycles $\leq 2.0\%$.

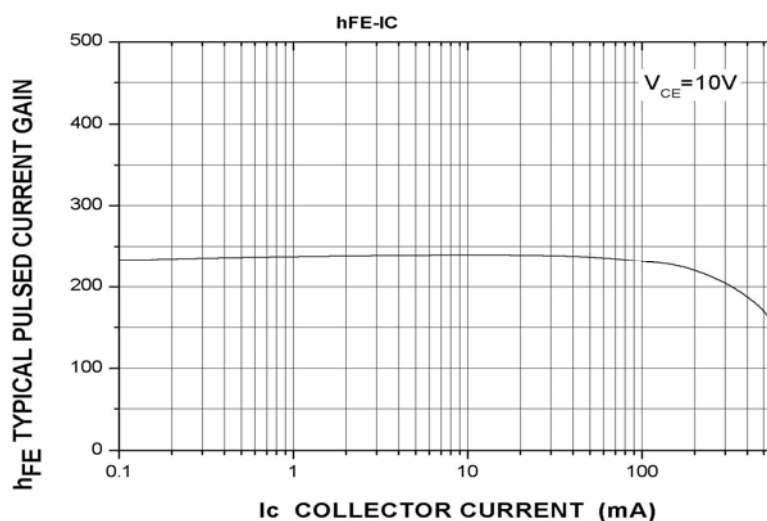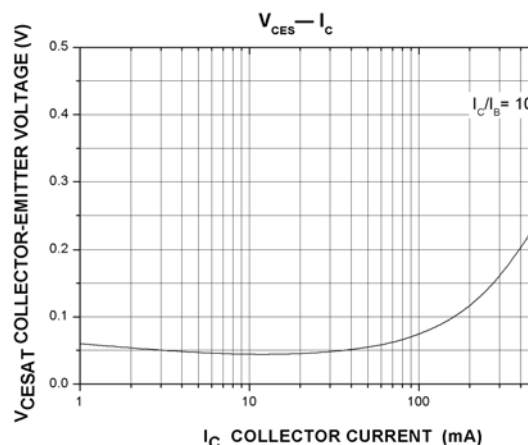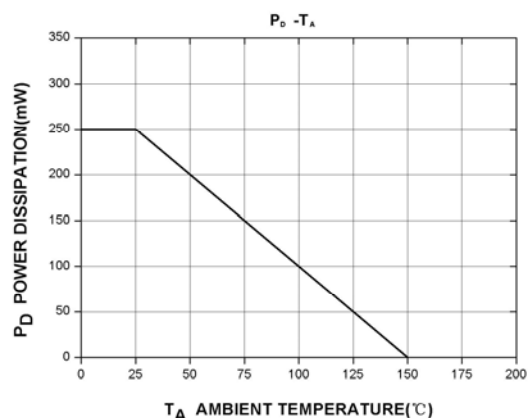

WPMtek reserves the right to make changes to the product specification and data in this document without notice. WPMtek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does WPMtek assume any liability arising from the application or use of any products or circuits, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Any enquiry, please write to sales@wpmtek.com for further information.