


FEATURE

- Planar Die Construction
- 0.5W Power Dissipation on Ceramic PCB
- General Purpose, Medium Current
- Ideally Suited for Automated Assembly Processes
- Available in Lead Free Version

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode




Please contact WPM sales for marking code.

Maximum Ratings($T_a=25^{\circ}\text{C}$ unless otherwise specified)

Characteristic	Symbol	Value	Unit
Forward Voltage @ $I_F = 10\text{mA}$	V_F	0.9	V
Power Dissipation	P_d	500	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	250	$^{\circ}\text{C/W}$
Junction Temperature (Note 1)	T_j	150	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55 ~ +150	$^{\circ}\text{C}$

Notes: 1. Valid provided that electrodes are kept at ambient temperature

Zener I vs. V Characteristics

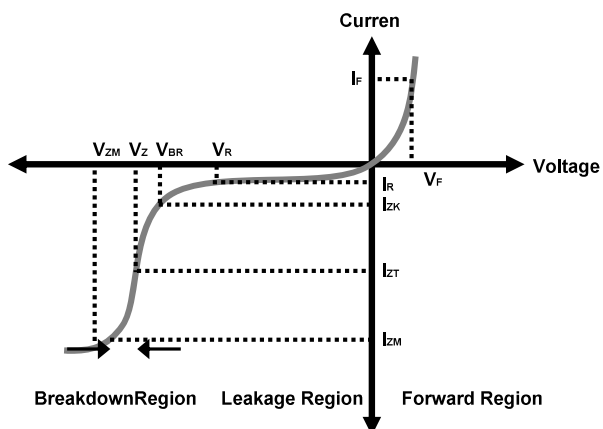

- V_{BR} : Voltage at I_{ZK}
- I_{ZK} : Test current for voltage V_{BR}
- Z_{ZK} : Dynamic impedance at I_{ZK}
- I_{ZT} : Test current for voltage V_Z
- V_Z : Voltage at current I_{ZT}
- Z_{ZT} : Dynamic impedance at I_{ZT}
- I_{ZM} : Maximum steady state current
- V_{ZM} : Voltage at I_{ZM}

Electrical Characteristics(T a = 25°C unless otherwise specified)

Type Number	Zener Voltage Range				Maximum Zener Impedance			Maximum Reverse Current	
	V _Z @I _{ZT}			I _{ZT}	Z _{ZT} @I _{ZT}	Z _{ZK} @I _{ZK}	I _{ZK}	I _R	V _R
	Nom.(V)	Min.	Max.	mA	Ω		mA	μA	V
BZT52B2V4	2.4	2.35	2.45	5	100	600	1.0	50	1.0
BZT52B2V7	2.7	2.65	2.75	5	100	600	1.0	20	1.0
BZT52B3V0	3.0	2.94	3.06	5	95	600	1.0	10	1.0
BZT52B3V3	3.3	3.23	3.37	5	95	600	1.0	5	1.0
BZT52B3V6	3.6	3.53	3.67	5	90	600	1.0	5	1.0
BZT52B3V9	3.9	3.82	3.98	5	90	600	1.0	3	1.0
BZT52B4V3	4.3	4.21	4.39	5	90	600	1.0	3	1.0
BZT52B4V7	4.7	4.61	4.79	5	80	500	1.0	3	2.0
BZT52B5V1	5.1	5.00	5.20	5	60	480	1.0	2	2.0
BZT52B5V6	5.6	5.49	5.71	5	40	400	1.0	1	2.0
BZT52B6V2	6.2	6.08	6.32	5	10	150	1.0	3	4.0
BZT52B6V8	6.8	6.66	6.94	5	15	80	1.0	2	4.0
BZT52B7V5	7.5	7.35	7.65	5	15	80	1.0	1	5.0
BZT52B8V2	8.2	8.04	8.36	5	15	80	1.0	0.7	5.0
BZT52B9V1	9.1	8.92	9.28	5	15	100	1.0	0.5	6.0
BZT52B10	10	9.8	10.20	5	20	150	1.0	0.2	7.0
BZT52B11	11	10.78	11.22	5	20	150	1.0	0.1	8.0
BZT52B12	12	11.76	12.24	5	25	150	1.0	0.1	8.0
BZT52B13	13	12.74	13.26	5	30	170	1.0	0.1	8.0
BZT52B15	15	14.70	15.30	5	30	200	1.0	0.1	10.5
BZT52B16	16	15.68	16.32	5	40	200	1.0	0.1	11.2
BZT52B18	18	17.64	18.36	5	45	225	1.0	0.1	12.6
BZT52B20	20	19.60	20.40	5	55	225	1.0	0.1	14.0
BZT52B22	22	21.56	22.44	5	55	250	1.0	0.1	15.4
BZT52B24	24	23.52	24.48	5	70	250	1.0	0.1	16.8
BZT52B27	27	26.46	27.54	2	80	300	0.5	0.1	18.9
BZT52B30	30	29.40	30.60	2	80	300	0.5	0.1	21.0
BZT52B33	33	32.34	33.66	2	80	325	0.5	0.1	23.1
BZT52B36	36	35.28	36.72	2	90	350	0.5	0.1	25.2
BZT52B39	39	38.22	39.78	2	130	350	0.5	0.1	27.3
BZT52B43	43	41.16	42.84	2	150	353	0.5	0.1	30.1
BZT52B47	47	46.06	47.94	2	170	353	0.5	0.1	33.0
BZT52B51	51	49.98	52.02	2	180	376	0.5	0.1	35.7
BZT52B56	56	54.88	57.12	2	200	400	0.5	0.1	39.2
BZT52B62	62	60.76	63.24	2	215	423	0.5	0.1	43.4
BZT52B68	68	66.64	69.36	2	240	447	0.5	0.1	47.6
BZT52B75	75	73.05	76.50	2	255	470	0.5	0.1	52.5

Notes:

1. The Zener Voltage (V_Z) is tested under pulse condition of 10ms.
2. The device numbers listed have a standard tolerance on the nominal zener voltage of $\pm 2\%$
3. The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the DC zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK}.

Typical Characteristics

FIG 1 Typical Forward Characteristics

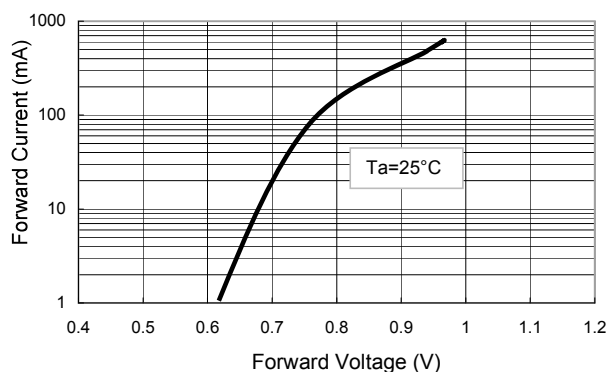


FIG 2 Zener Breakdown Characteristics

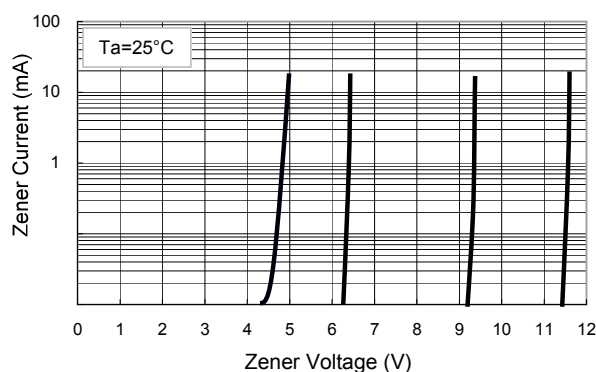


FIG 3 Zener Breakdown Characteristics

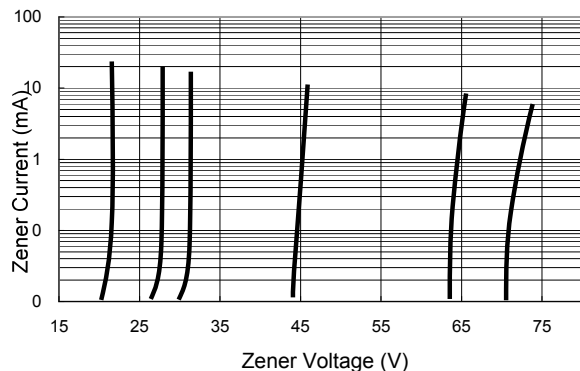


FIG 4 Admissible Power Dissipation Curve

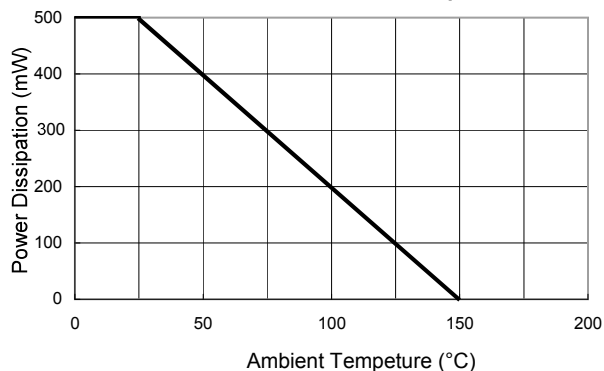


FIG 5 Typical Capacitance


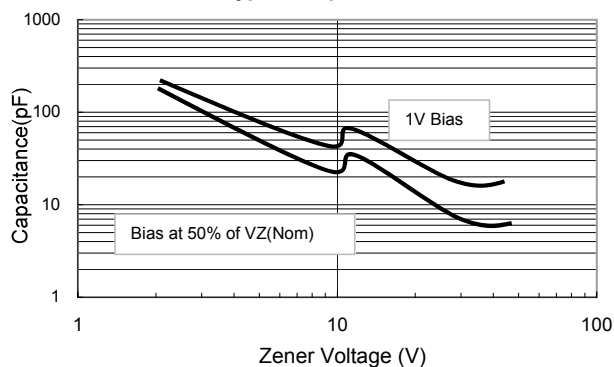



FIG 6 Effect of Zener Voltage on Impedance

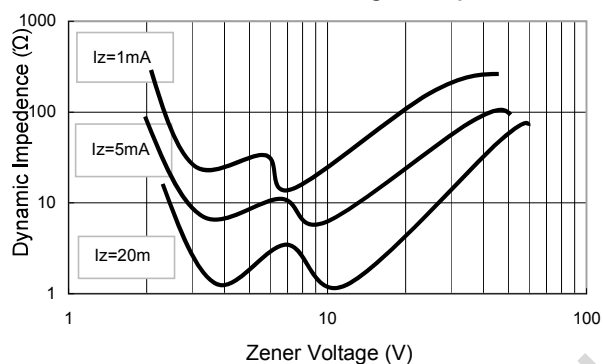

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-123

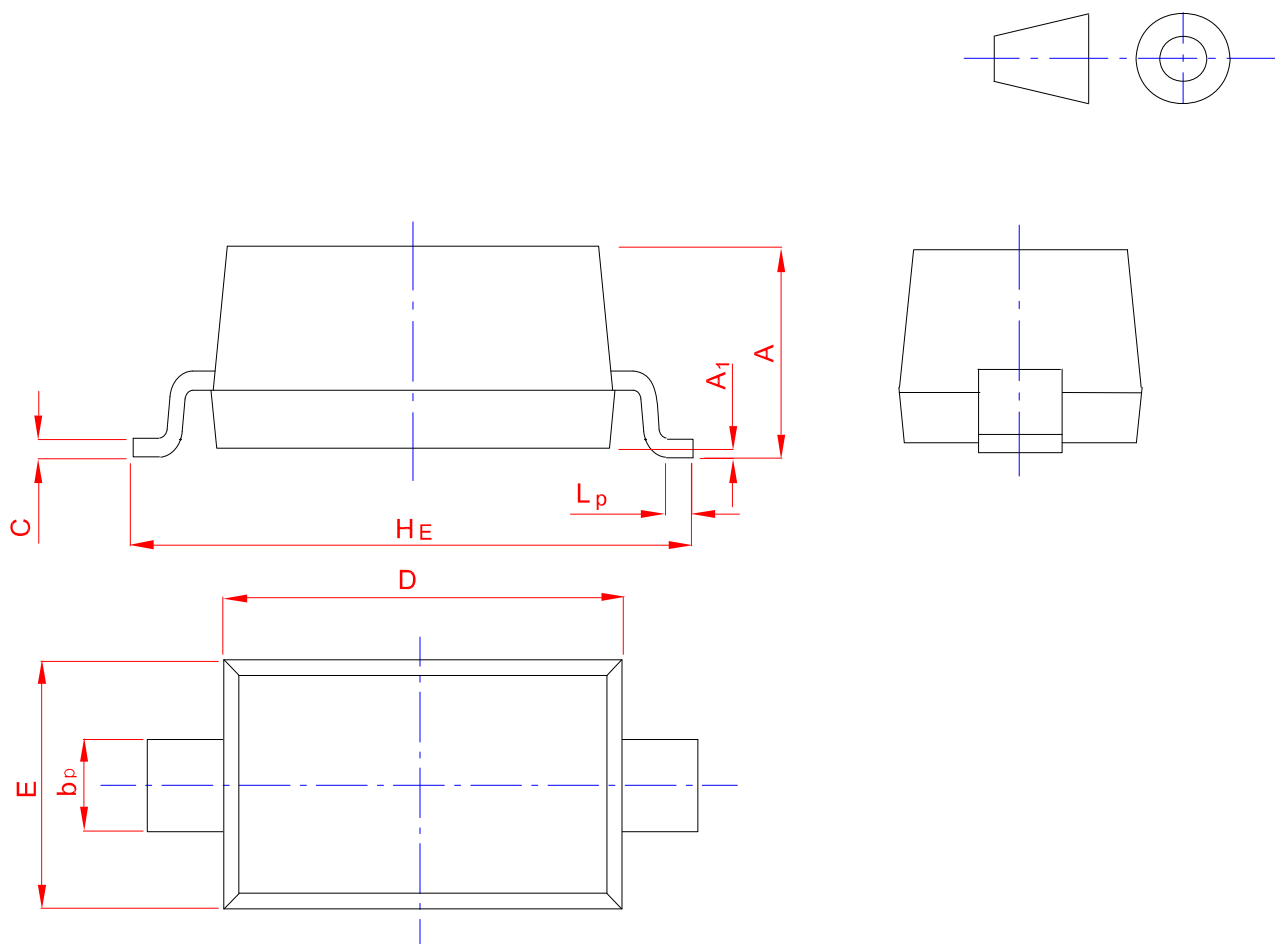

UNIT	A	bp	C	D	E	HE	A1	Lp
mm	1.20 0.90	0.60 0.50	0.135 0.100	2.75 2.55	1.65 1.55	3.85 3.55	0.10 0.01	0.50 0.20

WPMtek reserves the right to make changes to the product specification and data in this document without notice. WPMtek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does WPMtek assume any liability arising from the application or use of any products or circuits, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Any enquiry, please write to sales@wpmtek.com for further information.