

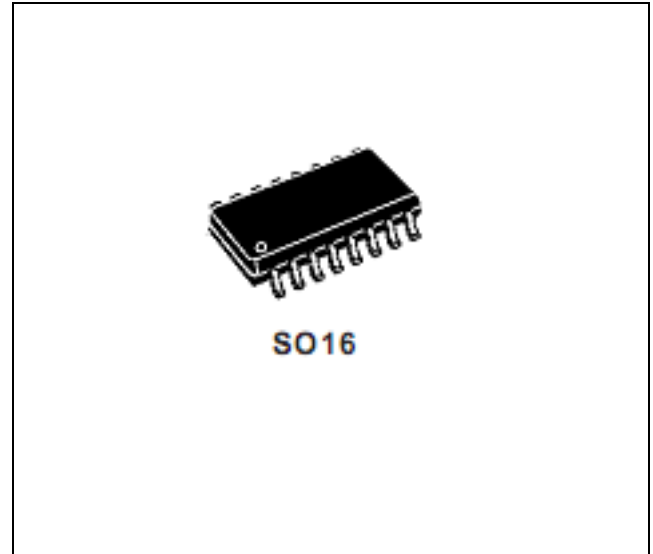
MAX3232CSE-IDC 3V to 5.5v Dual channel RS-232 Drivers/Receivers

FEATURES

- Output voltage levels are compatible with input levels of CMOS and TTL integrated circuits
- Meets All EIA/TIA-232E and V.28/V.24 Specifications
- Supply voltage range from 3V to 5.5V
- Low input current: 1.0μA at 25°C
- Available in SOP-16 Package

APPLICATIONS

- Portable Computers
- Battery-Powered RS-232 Systems
- Interface Translation
- Low-Power Modems
- Terminals



ORDERING INFORMATION

Device	Package
MAX3232CSE-IDC	SOP-16

* Refer to the ordering information for the details.

DESCRIPTION

The MAX3232CSE is a dual driver/receiver of RS-232 standard with a single supply voltage and bipolar output voltage of the transmitter formed by a built-in voltage multiplying generator on four 1.0μF external capacitors, designed for use in state-of-the-art high performance computing systems, high-speed electronic devices with high reliability of information exchange between remote objects.

Input voltage levels are compatible with standard CMOS and TTL levels.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Supply Voltage	V_{CC}	-0.3	5.5	V
Transmitter High Output Voltage	V_+	$V_{CC}-0.3$	7	V
Transmitter Low Output Voltage	V_-	-7.0	0.3	V
Transmitter Input Voltage	V_{TIN}	-0.3	$V_++0.3$	V
Receiver Input Voltage	V_{RIN}	-12	12	V
Voltage Applied to Transmitter Output	V_{TOUT}	$V_- - 0.3$	$V_++0.3$	V
Voltage Applied to Receiver Output	V_{ROUT}	-0.3	$V_{CC}+0.3$	V
Storage Temperature Range	T_{STG}	-65	150	°C



RECOMMENDED OPERATING CONDITIONS

ORDERING INFORMATION

The diagram illustrates the pinout of the MAX3232 component. It shows a vertical line representing the pinout, with labels on the left and right. On the left, the labels are **MAX** and **3232**. On the right, the labels are **Level**, **Package Type**, **Temperature**, **Root Name**, and **Product Code**. Arrows point from the labels on the right to the corresponding pins on the vertical line. The **Level** pin is connected to the **MAX** label. The **Package Type** pin is connected to the **3232** label. The **Temperature** pin is connected to the **MAX** label. The **Root Name** pin is connected to the **3232** label. The **Product Code** pin is connected to the **MAX** label.

MAX 3232

Level

Package Type

Temperature

Root Name

Product Code

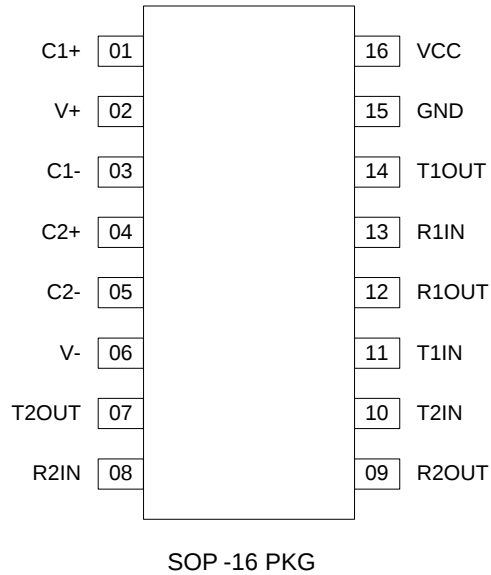
A :

S : SOP-16

E : -40°C ~ 85°C

MAX3232CSE-IDC 3V to 5.5v Dual channel RS-232 Drivers/Receivers

PIN CONFIGURATION




PIN DESCRIPTION

Pin No.	Pin Name	Pin Description
1	C1+	Terminal for Positive Charge-Pump C1 Capacitor
2	V+	Positive Voltage Generated by the Charge-Pump
3	C1-	Terminal for Negative Charge-Pump C1 Capacitor
4	C2+	Terminal for Positive Charge-Pump C2 Capacitor
5	C2-	Terminal for Negative Charge-Pump C2 Capacitor
6	V-	Negative Voltage Generated by the Charge-Pump
7	T2OUT	RS-232 Driver Output (Levels RS-232)
8	R2IN	RS-232 Receiver Input (Levels RS-232)
9	R2OUT	RS-232 Receiver Output (Levels TTL/CMOS)
10	T2IN	RS-232 Driver Input (Levels TTL/CMOS)
11	T1IN	RS-232 Driver Input (Levels TTL/CMOS)
12	R1OUT	RS-232 Receiver Output (Levels TTL/CMOS)
13	R1IN	RS-232 Receiver Input (Levels RS-232)
14	T1OUT	RS-232 Driver Output (Levels RS-232)
15	GND	Ground
16	VCC	Supply Voltage Input

MAX3232CSE-IDC 3V to 5.5v Dual channel RS-232 Drivers/Receivers

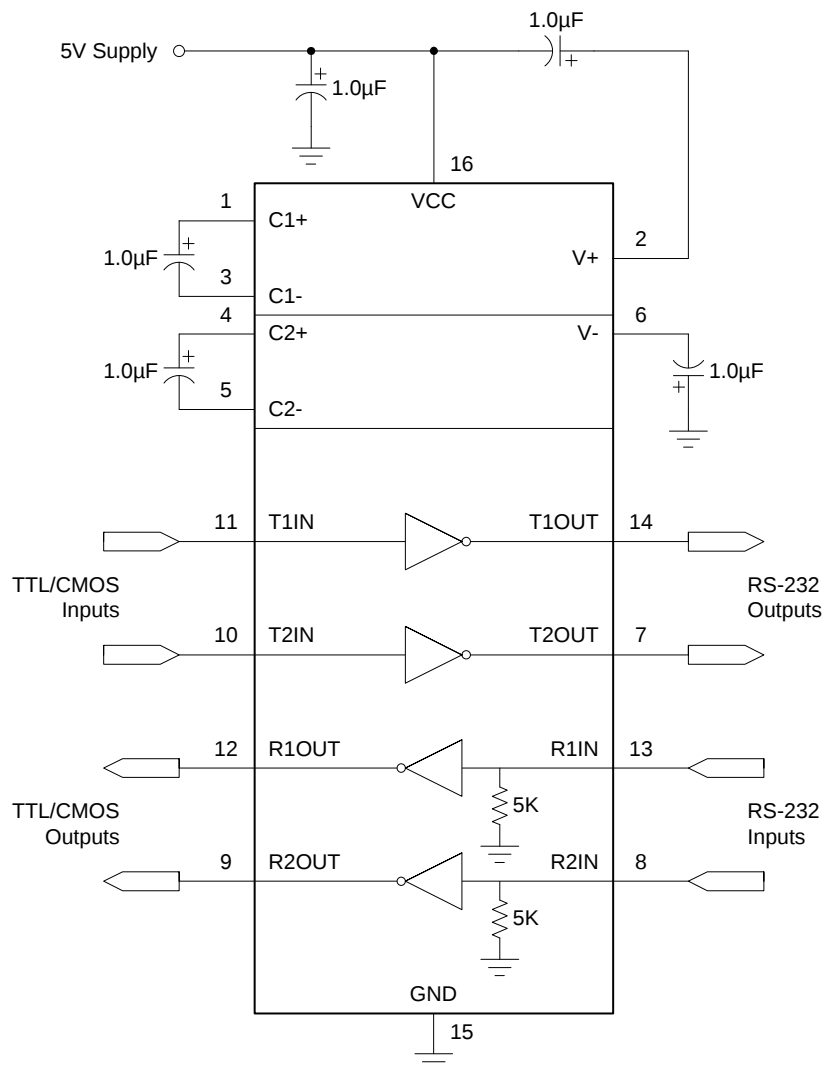TYPICAL APPLICATION CIRCUIT



FUNCTION TABLE



INPUT (RIN, TIN)	OUTPUT (ROUT, TOUT)
L (Low Level)	H (High Level)
H (High Level)	L (Low Level)

MAX3232CSE-IDC 3V to 5.5v Dual channel RS-232 Drivers/Receivers

ELECTRICAL CHARACTERISTICS

(Limits in standard typeface are for $T_A=25^{\circ}\text{C}$, and the limits in boldface type apply over full operating temperature range.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Supply Current	I _{CC}	V _{CC} = 5.5V V _{IL} = 0V		-	-	8 10.0	mA
Receiver Parameters							
Hysteresis Voltage	V _h	V _{CC} = 5.0V		0.2 0.2	-	0.9 1.0	V
On (Operation) Voltage	V _{on}	V _O ≤ 0.1V, I _{OL} ≤ 20μA		-	-	2.4 2.3	V
Off (Dropout) Voltage	V _{off}	V _O ≥ V _{CC} - 0.1V I _{OH} ≤ -20μA		0.8 0.9	-	-	V
Output Low Voltage	V _{OL}	I _L = 3.2mA, V _{CC} = 4.5V, V _{IH} = 2.4V		-	-	0.3 0.4	V
Output High Voltage	V _{OH}	I _{OH} = -1.0mA, V _{CC} = 4.5V, V _{IL} = 0.8V		3.6 3.5	-	-	V
Input Resistance	R _I	V _{CC} = 5.0V		3.0 3.0	-	7.0 7.0	kΩ
Transmitter Parameters							
Output Low Voltage	V _{OL}	V _{CC} = 4.5V, V _{IH} = 2.0V, R _L = 3.0kΩ		-	-	-5.2 -5.0	V
Output High Voltage	V _{OH}	V _{CC} = 4.5V, V _{IL} = 0.8V, R _L = 3.0kΩ		5.2 5.0	-	-	V
Input Low Current	I _{IL}	V _{CC} = 5.5V, V _{IL} = 0V		-	-	-1.0 -10.0	μA
Input High Current	I _{IH}	V _{CC} = 5.5V, V _{IH} = V _{CC}		-	-	1.0 10.0	μA
Speed Of Output Front Charge	SR	V _{CC} = 5.0V, C _L = 50 - 1000pF, R _L = 3.0 - 7.0kΩ		3.0 2.7	-	30 27	V/μs
Output Resistance	R _O	V _{CC} = V ₊ = V ₋ = 0V V _O = ±2V		350 300	-	-	Ω
Short Circuit Output Current	I _{SC}	V _{CC} = 5.5V V _O = 0V	V _I = V _{CC}	-	-	-50 -60	mA
			V _I = 0	-	-	50 60	
Speed Of Information Transmission	ST	V _{CC} = 4.5V, C _L = 1000pF, R _L = 3.0kΩ, t _w = 7μs (for extreme, t _w = 8μs)		250 300	-	-	kbit/s
Dynamic Parameters							
Signal Propagation Delay Time When Switching On (Off)	t _{PHLR} (t _{PLHR})	V _{CC} = 4.5V, C _L = 150pF, V _{IL} = 0V, V _{IH} = 3.0V, t _{LH} = t _{HL} ≤ 10ns		-	-	9.7 10.0	μs
Signal Propagation Delay Time When Switching On (Off)	t _{PHLT} (t _{PLHT})	V _{CC} = 4.5V, C _L = 2500pF, V _{IL} = 0V, V _{IH} = 3.0V, R _L = 3kΩ, t _{LH} = t _{HL} ≤ 10ns		-	-	5.0 6.0	μs

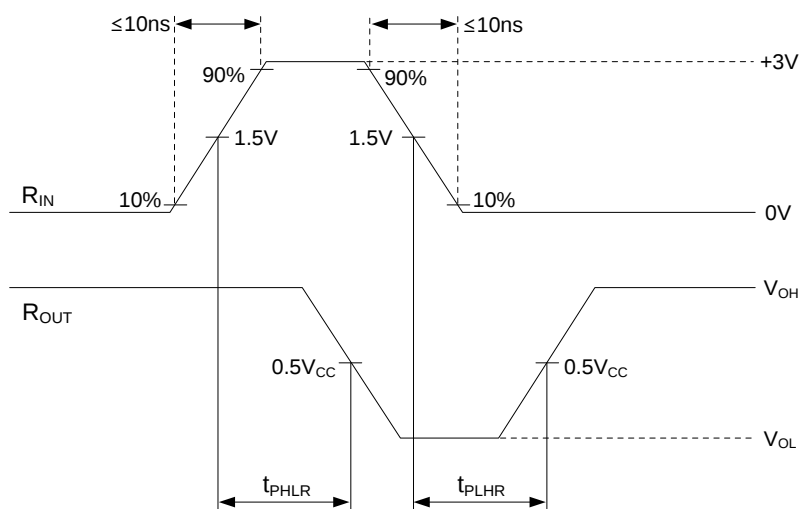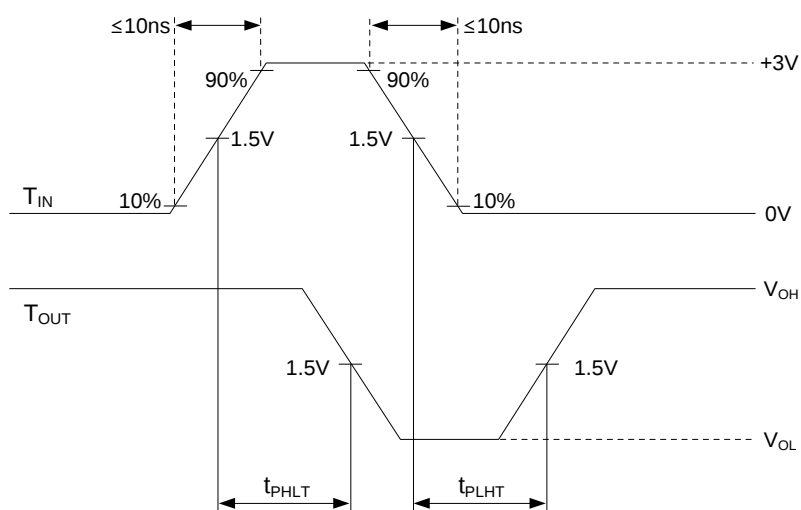MAX3232CSE-IDC 3V to 5.5v Dual channel RS-232 Drivers/Receivers
TIMING DIAGRAM

Figure 1. t_{PHL} and t_{PLH} waveforms of Receiver

Figure 2. t_{PHL} and t_{PLH} waveforms of Transmitter

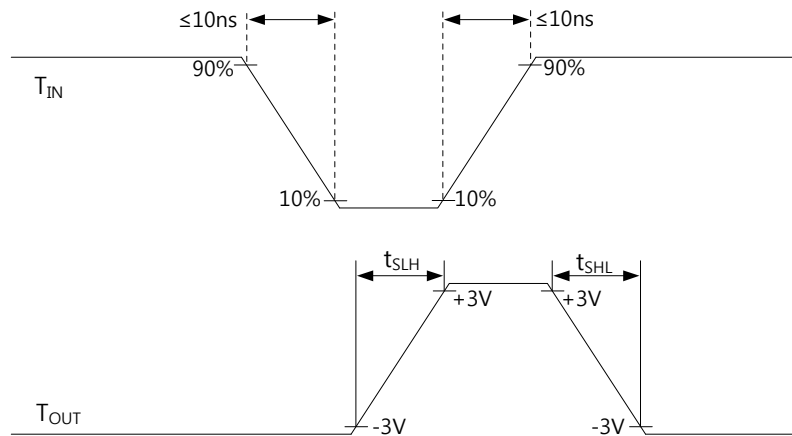


Figure 3. t_{SLH} and t_{SHL} waveforms of Transmitter



ShenzhenInDreamChipTechnologyCo.,LTD

MAX3232CSE-IDC 3V to 5.5v Dual channel RS-232 Drivers/Receivers

REVISION NOTICE

The description in this datasheet is subject to change without any notice to describe its electrical characteristics properly.