



产品编码 P/N	PDMTAT1575S-100MWU	测试设备 TEST INSTRUMENT	Chroma: 3302 16502
产品系列 Series	磁环电感 Magnet	测试频率 TEST FREQUENCY	1KHZ / 0.3V

客户名称

Customer

:

客户编码

Customer P/N

:

产品系列

Series

:

磁环电感

Magnet

产品编码

Supply P/N

:

PDMTAT1575S-100MWU

发版号

Version

:

A4.0

承认日期

Endorsement Date

:

2025-11-6

备注

Note

:

谱罗德电子科技（深圳）有限公司

PuLuoDe Electronic Technology (Shenzhen) Co. LTD

制作

APPROVED

Ben

审查

CHECKED

Yuki

确认

PREPARED

Peter

客户承认

Customer Approval

烦请贵司在正式订单下达前确认回签本承诺书，否则敝司默认贵司认可本承诺书内的参数与条款，并以此参数生产交货

Please confirm and sign this acknowledgement letter before placing the formal order, otherwise PROD will acquiesce that your company recognizes the parameters and terms in this acknowledgement letter, and will produce and deliver according to these parameters.

客户签章



修订记录
REVISION RECORD



产品编码 P/N	PDMTAT1575S-100MWU	测试设备 TEST INSTRUMENT	Chroma: 3302 16502
产品系列 Series	磁环电感 Magnet	测试频率 TEST FREQUENCY	1KHZ / 0.3V

Version	REVISION ITEM	BEFORE REVISION	AFTER REVISION	DATE
A4.0	First Version			2025-11-6



电气特性


A4.0

ELECTRICAL CHARACTERISTICS



产品编码 P/N	PDMTAT1575S-100MWU	测试设备 TEST INSTRUMENT	Chroma: 3302 16502
产品系列 Series	磁环电感 Magnet	测试频率 TEST FREQUENCY	1KHZ / 0.3V

封装尺寸 (mm) Dimension

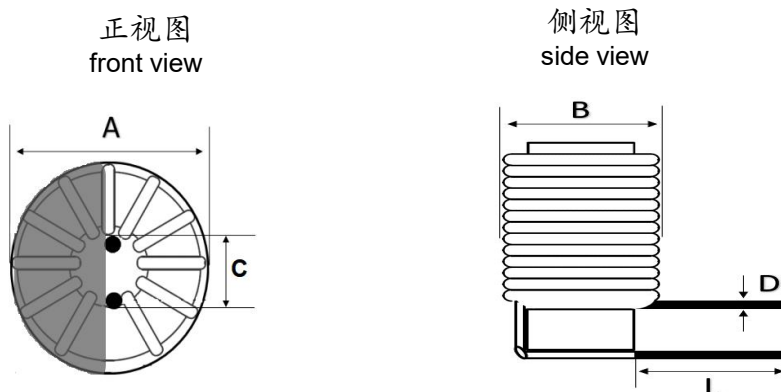

系列 Series	封装尺寸 Dimension					MPQ
	A	B	C	D	L	
1575	15 Max	7.5 Max	8.0 Ref	0.8±0.1	4 Min	400pcs/盒装

编码解释

Code interpretation

P D M T A T	XXXX	-	XXX	M	W	U
類別碼	尺寸系列		感值	精度	卧式	熱縮套管
Category code	Dimension		Inductance	Tolerance	Horizontal type	Drivepipe

电气参数

Electrical Characteristics

產品編碼 P/N	Ambient Temperture				
	感值 Inductance	精度 Tolerance	DCR	额定电流 rated current	耐壓 HI-POT
	N1/N2	N1/N2	mΩ	A	PIN1~C/PIN2~C
	μH	±	Max	ΔT≈40℃	AC 600V
PDMTAT1575S-100MWU	10	20%	10	10.0	AC/60Hz 1mA 3Sec

- ◎ 规格参数基于环境温度25℃所得
All test Data is referenced to 25℃ ambient
- ◎ 电感工作环境温度：-40℃ ~ +105℃
Operating temperature range -40 °C to +105 °C
- ◎ 务必考虑最终产品设计，元器件布局，线路板走线，以及使用环境等过程中，电感本体最高温度不得超过105℃
The operating temperature of inductance do not exceed 105℃
- ◎ 部分规格尺寸标识符“Ref”则代表该尺寸为参考值，无明确的正负公差
Ref=It is merely a reference value and does not have positive or negative tolerance.
- ◎ 产品注意事项请参阅规格书第7页
The announcements is on page 7

Page 3 / 7



谱罗德电子科技（深圳）有限公司

PuLuoDe Electronic Technology (Shenzhen) Co., LTD

深圳市宝安区石岩三联工业区B栋311

更多规格请访问谱罗德官方网站下载或
者扫描二维码通过微信小程序获取


<http://www.prodtech.cn/>



产品编码 P/N	PDMTAT1575S-100MWU	测试设备 TEST INSTRUMENT	Chroma: 3302 16502
产品系列 Series	磁环电感 Magnet	测试频率 TEST FREQUENCY	1KHZ / 0.3V

电路图

Schematic



• START

◎ 电感内置一组线圈

Inductor Contents Two (1) Set(s) of Coil

图示参考

Diagram reference



材料清單

Material List

NO	材料 ITEM	材質規格 Material	製造商 Manufacturer	UL NO.
1	磁芯 / Core	T1575	YUZHENG (或等同廠商規格)	N.A
2	漆包線 / Wire	2UEW+F 155℃	ELKTRISOLA (或等同廠商規格)	E258243
3	锡条 / Sn	LEAD FREE SOLDER	CITY (或等同廠商規格)	N.A
4	套管/Drivepipe	φ12mm	CY(或等同廠商規格)	E180908


*组件的材料不限制于清单内的制造商/The material of the part is not limited to the listed manufacturer



产品编码 P/N	PDMTAT1575S-100MWU	测试设备 TEST INSTRUMENT	Chroma: 3302 16502
产品系列 Series	磁环电感 Magnet	测试频率 TEST FREQUENCY	1KHZ / 0.3V

焊接温度（推荐）

Recommended Soldering Temperature Graph

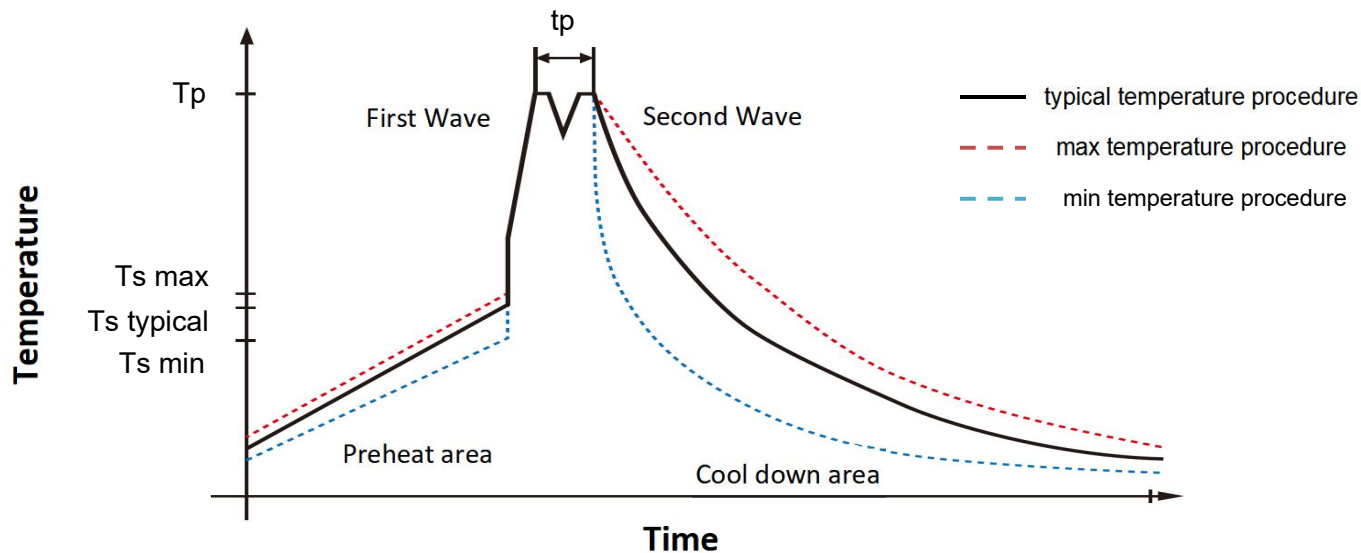

Profile Feature	Item	Pb-Free Assembly	Sn-Pb Assembly
Preheat Temperature Min	Ts min	100 °C	
Preheat Temperature Typical	Ts typical	120 °C	
Preheat Temperature Max	Ts max	130 °C	
Preheat Time ts from Ts min to Ts max	ts	70 seconds	
Ramp-up Rate	ΔT	150 °C max.	
Peak Temperature	Tp	250 °C - 260 °C	235 °C - 260 °C
Time of actual peak temperature	tp	max. 10 secondsmax. 5 seconds each wave	
Ramp-down Rate, Min		~ 2 K/ second	
Ramp-down Rate, Typical		~ 3.5 K/ second	
Ramp-down Rate, Max		~ 5 K/ second	
Time 25 °C to 25 °C		4 minutes	

* 参考标准: EN61760-1:2006 refer standard to: EN61760-1:2006



测试数据

TEST REPORT



产品编码 P/N	PDMTAT1575S-100MWU	测试设备 TEST INSTRUMENT	Chroma: 3302 16502
产品系列 Series	磁环电感 Magnet	测试频率 TEST FREQUENCY	1KHZ / 0.3V

测试数据

Test Date

序号	尺寸测试数据				特性测试数据		
	Dimension Test Date				Characteristics Test Date		
	A	B	C	D	DCR	Lo	Judge
	mm	mm	mm	mm	mΩ Max	μH ±20%	
	15 Max	7.5 Max	8.0 Ref	0.8±0.1	10	10.0	
1	14.28	6.97	8.49	0.76	7.68	9.84	PASS
2	14.32	7.02	8.76	0.75	7.49	9.96	PASS
3	14.28	6.90	7.74	0.78	7.95	9.27	PASS
4	14.32	6.88	8.43	0.77	7.29	9.59	PASS
5	14.29	6.98	8.75	0.81	7.38	9.44	PASS
6							
7							
8							
9							
10							
X	14.30	6.95	8.43	0.77	7.558	9.62	

◎ 所有测试数据基于环境温度25℃取得

All test Data is referenced to 25℃ ambient





注意事项

使用本产品时，请注意以下事项

- © 产品保存期限为12个月，保存条件：温度5~40℃，湿度10~75%RH以内，超过保存期限可能会使元器件电极发生氧化，存储标准可参照：IEC_61760-2-2021
This components storage life is 12 months, Storage Temperature: TEMP.5~40℃; RH10~75%. Please use this components within the warranty period. refer standard to: IEC_61760-2-2021
- © 请勿在极端环境下使用和保存（高盐，强酸，强碱，强辐射等）。
Do not use this component in special environments, such as high salt content, strong acid, strong alkali, strong corrosion and other special environments.
- © 元器件焊接前,请进行预热,预热与焊接温度之间温差建议控制在150℃以内;焊接标准参考：EN61760-1:2006
Please preheat the product before welding; it is recommended to control the preheating temperature and welding temperature within 150℃. refer standard to: EN61760-1:2006
- © 元器件焊接后需重新拆卸焊接修正时，请遵循规格书规定的条件范围；过高的加热温度以及反复的拆卸可能会导致元器件失效。
When repairing this component, the temperature used for disassembly should not exceed the datasheet limit and do not disassemble it frequently to prevent damage to the component.
- © 请勿用清洗剂、丙酮等腐蚀性液体接触该元器件，这可能会侵蚀元器件本体以至于失效。
Do not use acetone or other corrosive liquids to contact this component or it will cause it to fail.
- © 元器件焊接到线路板后，请注意不可因线路板整体变形或局部变形而施加给电感剩余应力，这可能会导致元器件脱落、破损失效。
When this component is soldered to the circuit board, you need to pay attention to the stress applied to it by the PCB, which may cause it to fall off or damaged fail.
- © 元器件通电后温度会随电流的增大而上升，设计时请务必考虑留有余量。
Self heating (Rated Current or Irms) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- © 过高的静电会损坏该元器件，请注意静电防护。
Too high static electricity will cause permanent damage to the product, please pay attention to electrostatic protection.
- © 本元器件作为磁性产品，设计时请务必考虑周边元器件与本产品可能产生的耦合效应影响。
This magnetic component needs to be considered for coupling effects in the application.
- © 谱罗德并不能完全掌握或熟悉客户的特定应用以及要求，贵司有责任和义务验证此元器件以及元器件规格书中的描述是否满足于贵司的设计要求；需要指出是：即使按照现有的技术标准操作，该元器件依然有几率在典型寿命结束前发生故障，谱罗德强烈建议贵司对于该元器件在一些典型的严苛应用中，例如安规产品，工业产品、医疗产品、车载产品、航空/航天等产品应用，对于该元器件可能存在的失效情况做适当的冗余设计，以此避免该元器件在失效时造成严重后果；特别提醒：对于特定的应用对象谱罗德强烈要求贵司同谱罗德取得书面的许可，否则谱罗德不予承担元器件失效带来的任何责任，特定对象包括且不限于：车用，航空航天，安规产品，军用以及贵司对元器件有严苛要求的产品。

PROD cannot fully understand and be familiar with customers' specific applications and requirements. Your company has the responsibility and obligation to verify whether the components and the description in the component specification meet your design requirements. Special reminder: Even if operated in accordance with existing technical standards, this component still has a chance of failure before the end of its typical life. PROD strongly recommends that your company make appropriate redundant designs for possible failure situations of this component in some typical harsh applications, such as safety products, industrial products, medical products, automotive products, aviation/aerospace products, etc., so as to avoid serious consequences when the component fails.

PROD Requirements: For specific application item, PROD strongly requires your (or company) to obtain written permission from PROD, otherwise PROD will not bear any responsibility for component failure. Specific item list include but are not limited to: automotive, aerospace, safety products, military and products that your company has strict requirements on components.

