

1.Description

The UMW TL431 is a three-terminal adjustable regulator series with a guaranteed thermal stability over applicable temperature ranges. The output voltage may be set to any value between V_{ref} and 36 volts with two external resistors. These device have a typical dynamic output impedance of 0.27Ω , Active output circuitry provides a very sharp turn-on characteristic, making these devices excellent replacement for zener diodes in many applications.


2.Features

- Programmable Output Voltage to 36V.
- Low Dynamic Output Impedance :
TL431xx: 0.27Ω (Typical).
- Sink Current Capability of 0.1mA to 100mA.
- Equivalent Full-Range Temperature Coefficient of 50 ppm/°C
- Temperature Compensated for Operation over Full Rated Operating Temperature Range.
- Low Output Noise Voltage.
- Fast Turn on Responds.
- SOT-23, TO-92, SOT-89, SOP-8, packages


3.Applications

- Precision Voltage Reference
- Linear Regulator
- Adjustable Power Supply
- Switching Power Supply
- Graphic Card
- Adapter


4.Pinning Information




SOT-23



TO-92



SOT-89



SOP-8



5. Absolute Maximum Ratings

Parameter		Symbol	Value	Units
Cathode Voltage	UMW TL431x	V_{KA}	40	V
Cathode Current Range (Continuous)		I_K	-100 to 150	mA
Reference Input Current Range		I_{REF}	0.05 to 10	mA
Operating Temperature Range	UMW TL431x	$T_{oper.}$	-40 to 85	°C
Junction Temperature Range		T_J	150	°C
Storage Temperature Range		T_{STG}	-65 to 150	°C

6. Thermal Characteristics

Parameter	Package	Symbol	Value	Units
Thermal Resistance From Junction to Ambient in Free Air. (Measured with the component mounted on a high effective thermal conductivity test board in free air.)	SOT-23	θ_{JA}	400	°C/W
	TO-92		400	°C/W
	SOT-89		400	°C/W
	SOP-8		450	°C/W

7. Recommended Operating Conditions

Characteristic		Symbol	Min	Typ	Max	Units
Cathode Voltage	UMW TL431x	V_{KA}	V_{REF}		36	V
Cathode Current	UMW TL431x	I_K	0.5		100	mA



8. Electrical Characteristics

$T_A=25^{\circ}\text{C}$, $V_{KA}=V_{REF}$, $I_K=10\text{mA}$ unless otherwise noted.

Parameter	Symbol	Conditions		Min	Typ	Max	Units
Reference input Voltage	V _{REF}	V _{KA} =V _{REF} , I _K =10mA	0.5%	2.483	2.495	2.508	V
Deviation of Reference Input Voltage Over Full Temperature Range	V _{REF(dev)}	T _{min} ≤T _a ≤T _{max}			3	17	mV
Ratio of change in Reference input Voltage to the Change in Cathode Voltage	ΔV _{REF} /ΔV _{KA}	ΔV _{KA} =10V-V _{REF}		-0.4		2.7	mV/V
		ΔV _{KA} =36V-10V		-0.4		2	mV/V
Reference Input Current	I _{REF}	R ₁ =10KΩ, R ₂ =∞			1.8	4	μA
Deviation of Reference Input Current Over Full Temperature Range	I _{REF(dev)}	R ₁ =10KΩ, R ₂ =∞			0.4	1.2	μA
Minimum Cathode Current for Regulation	I _{K(min)}				0.25	0.5	mA
Off-State Cathode Current	I _{K(off)}	V _{KA} =40V, V _{REF} =0			0.17	0.9	μA
Dynamic Impedance	Z _{KA}	I _K =1mA to 100mA, f≤1.0KHz			0.27	0.5	Ω



9. Test Circuit

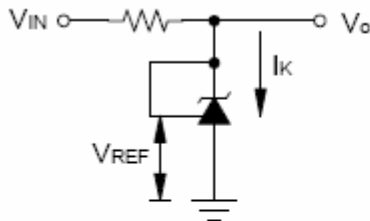


Figure 1. Test Circuit for
 $V_{KA} = V_{REF}$, $V_O = V_{KA} = V_{REF}$

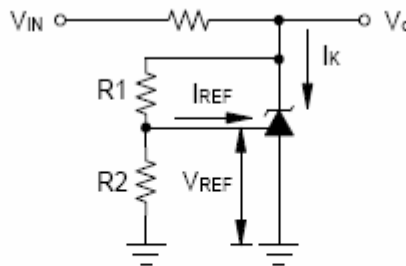


Figure 2. Test Circuit for $V_{KA} > V_{REF}$,
 $V_O = V_{KA} = V_{REF} \times (1 + R_1/R_2) + I_{REF} \times R_1$



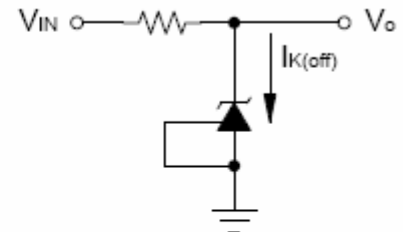


Figure 3. Test Circuit for $I_{K(off)}$

10. Typical Application Circuits

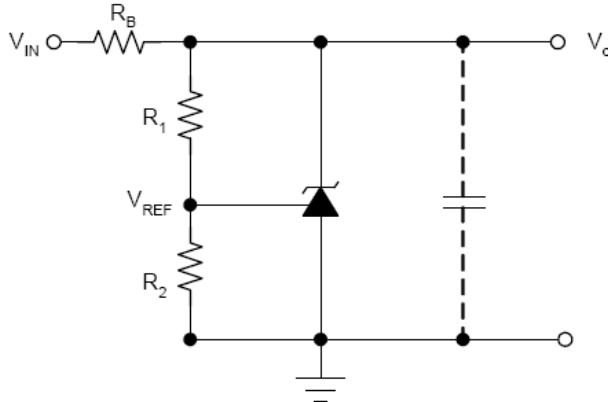

Precision Voltage Reference

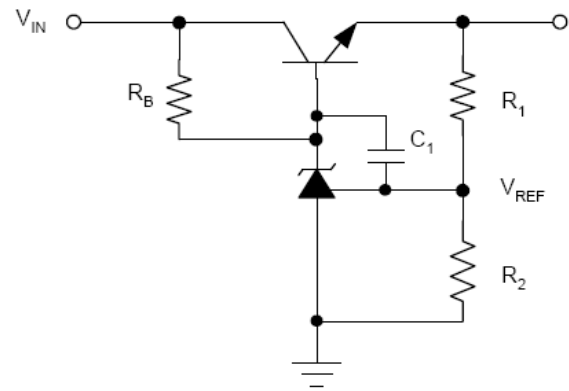







Precision High-Current Series Regulator

Notes for Typical Application Circuits:

- For the series regulator applications, add a compensation capacitor C_1 between CATHODE and REF is strongly recommended to improve the stability of output voltage.
- Set V_O according to the following equation: $V_O = V_{REF} \times (1 + R_1/R_2) + I_{REF} \times R_1$.
- Choose the Value for R_B as below:
 - The maximum limit for R_B should be such that the cathode current (I_K) is greater than the minimum operating current (0.5mA) at $V_{IN(MIN)}$.
 - The minimum limit for R_B should be such that the cathode current (I_K) does not exceed 100mA under all load conditions, and the instantaneous turn-on value for I_K does not exceed 120mA.



11.1 Typical Characteristic

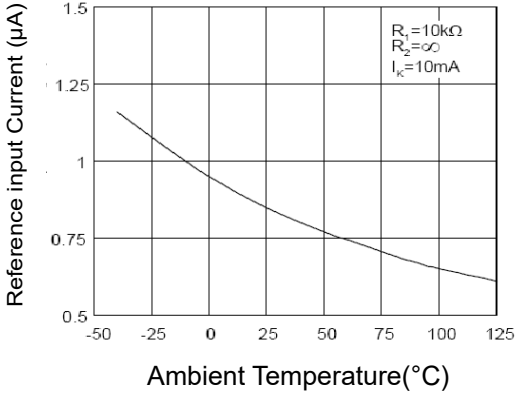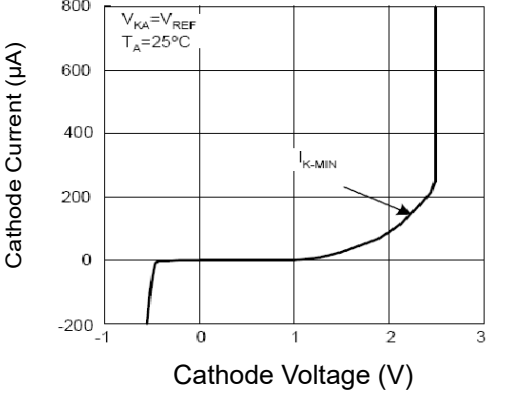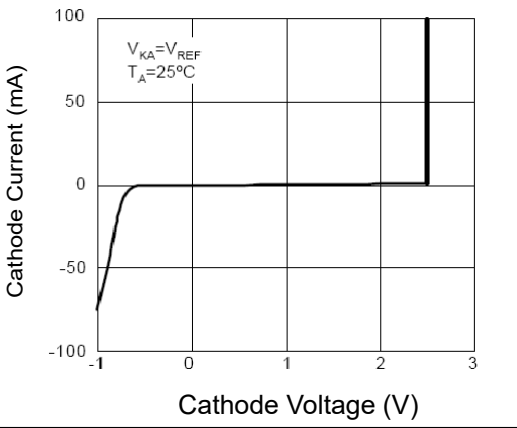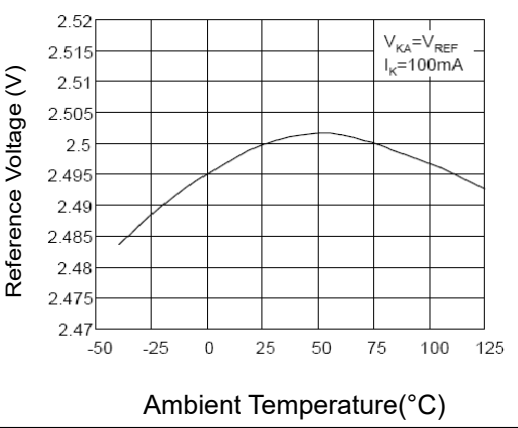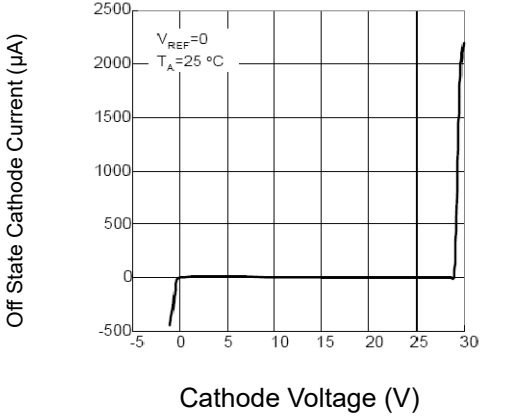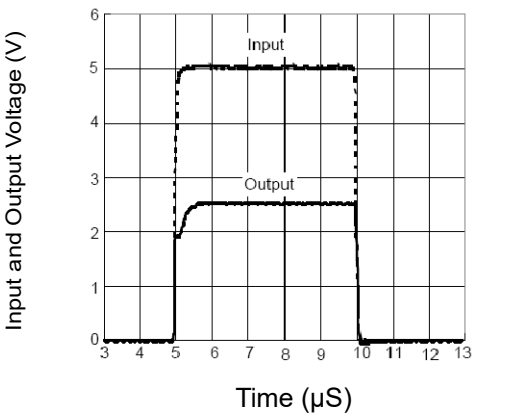	
Figure 1: Reference Input Current vs. Ambient Temperature	Figure 2: Cathode Current vs.Cathode Voltage
	
Figure 3: Cathode Current vs. Cathode Voltage	Figure 4: Reference Voltage vs. Ambient Temperature
	
Figure 5: Off State Cathode Current vs. Cathode Voltage	Figure 6: Pulse Response



11.2 Typical Characteristic

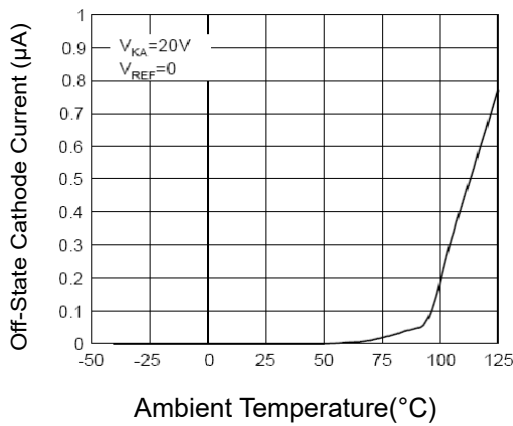


Figure 7: Off-State Cathode Current vs. Ambient Temperature

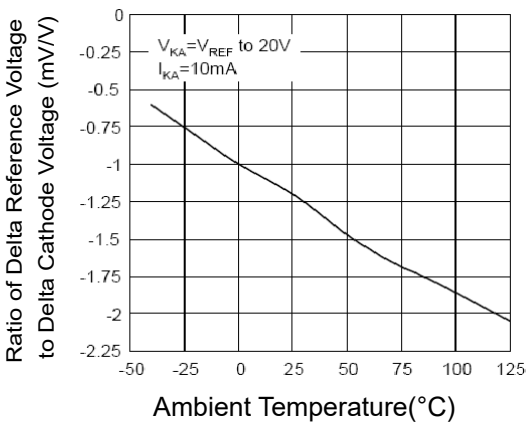


Figure 8: Ratio of Delta Reference Voltage to Delta Cathode Voltage vs. Ambient Temperature

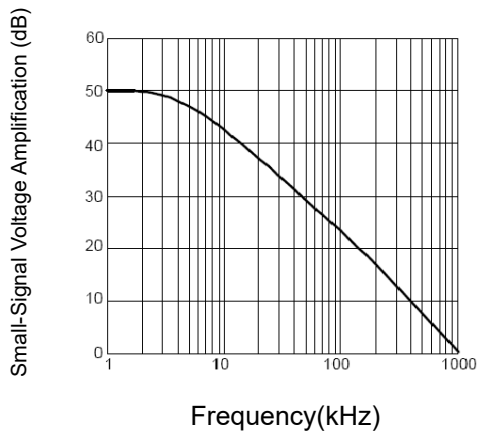


Figure 9: small-signal Voltage Amplification vs. Frequency

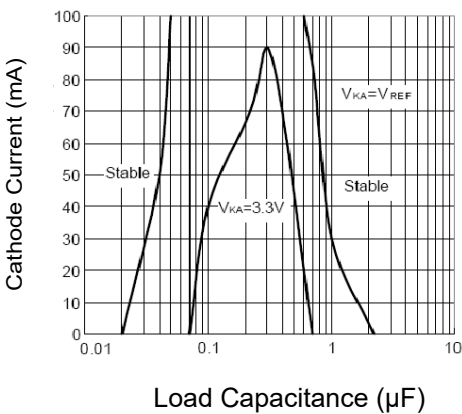


Figure 10: Stability Boundary Conditions

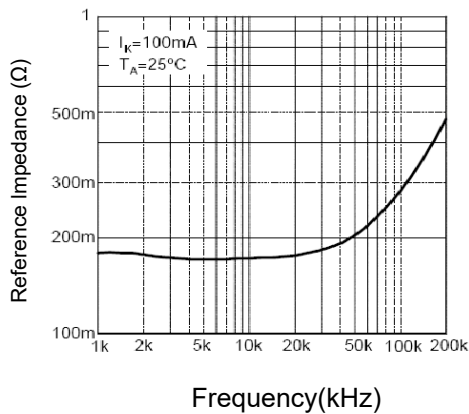


Figure 11: Reference Impedance vs. Frequency


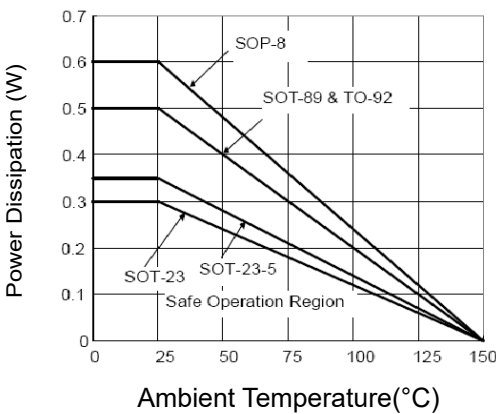


Figure 12: Power Dissipation vs. Ambient Temperature



12.1 SOT-23 Package Outline Dimensions

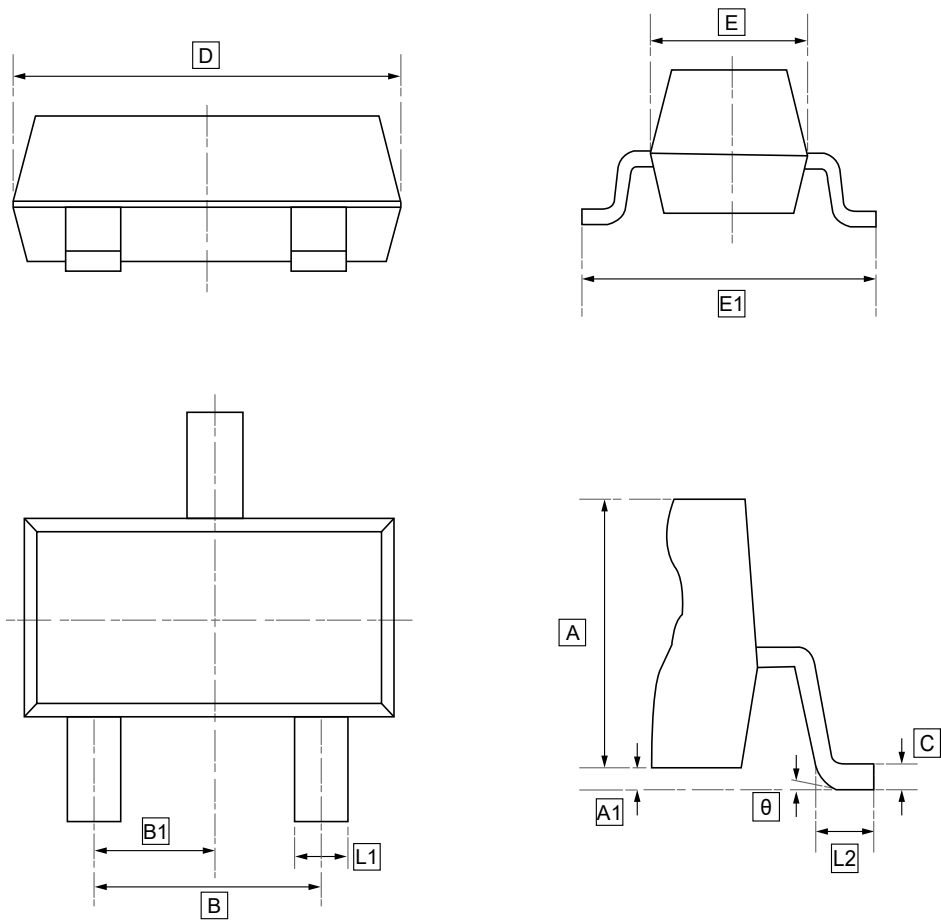


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	L1	L2	C	D	E	E1	B	B1	θ
Min	1.050	0.000	0.300	0.350	0.100	2.820	1.500	2.700	1.800	0.950	0°
Max	1.150	0.100	0.500	0.550	0.200	3.020	1.700	2.900	2.000	TYP	8°



12.2 SOT-89 Package Outline Dimensions

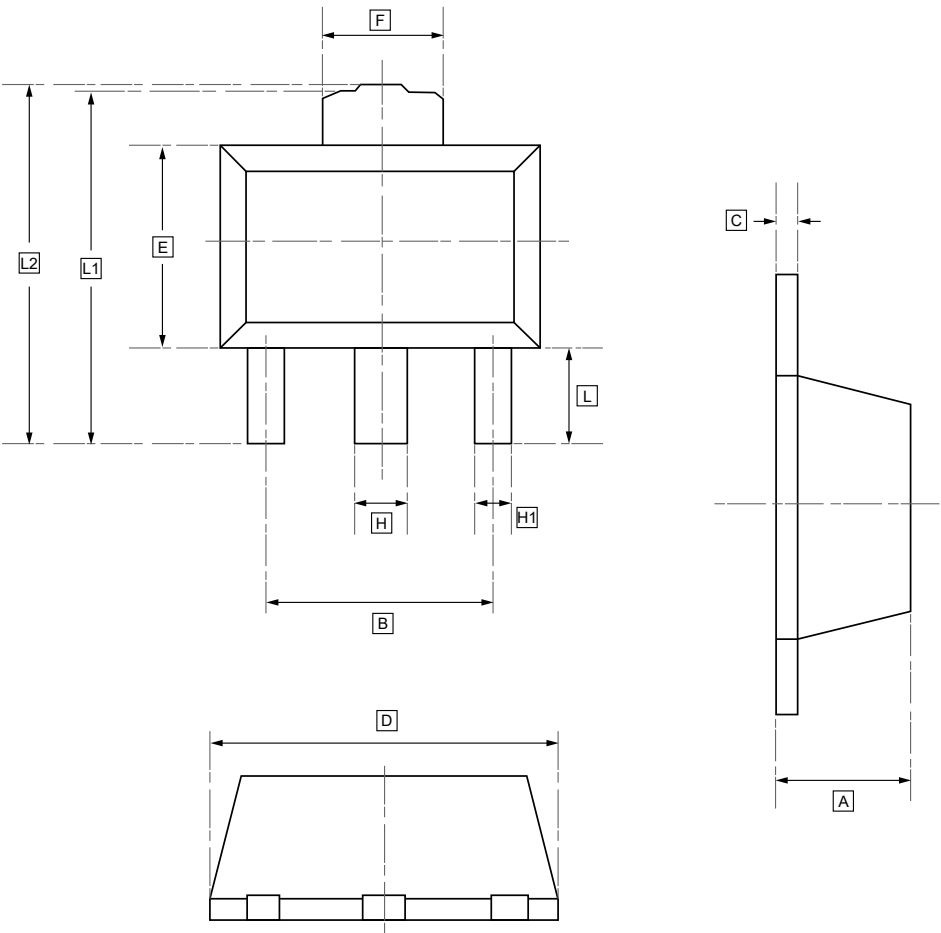


DIMENSIONS (mm are the original dimensions)

Symbol	A	B	C	D	E	F	H	H1	L	L1	L2
Min	1.450	2.950	0.330	4.450	2.450	1.650	0.450	0.370	0.900	4.100	4.100
Max	1.550	3.050	0.430	4.550	2.550	1.750	0.580	0.480	1.000	4.300	4.350



12.3 SOP-8 Package Outline Dimensions

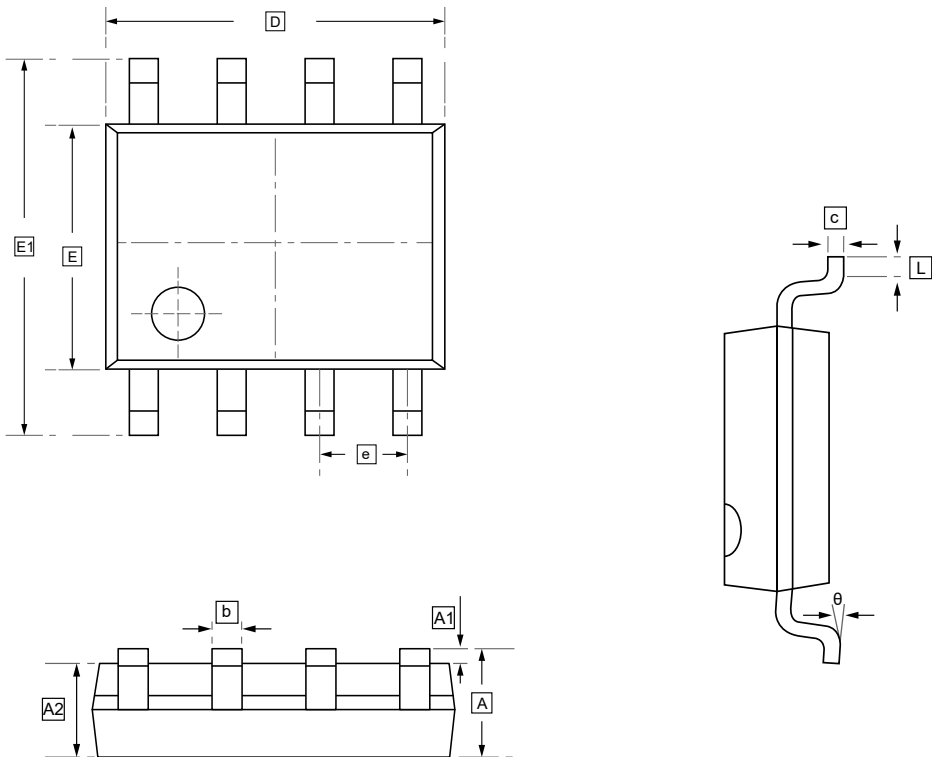


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0.000	1.350	0.330	0.170	4.700	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	5.100	4.000	6.200	BSC	1.270	8°



12.4 TO-92 Package Outline Dimensions

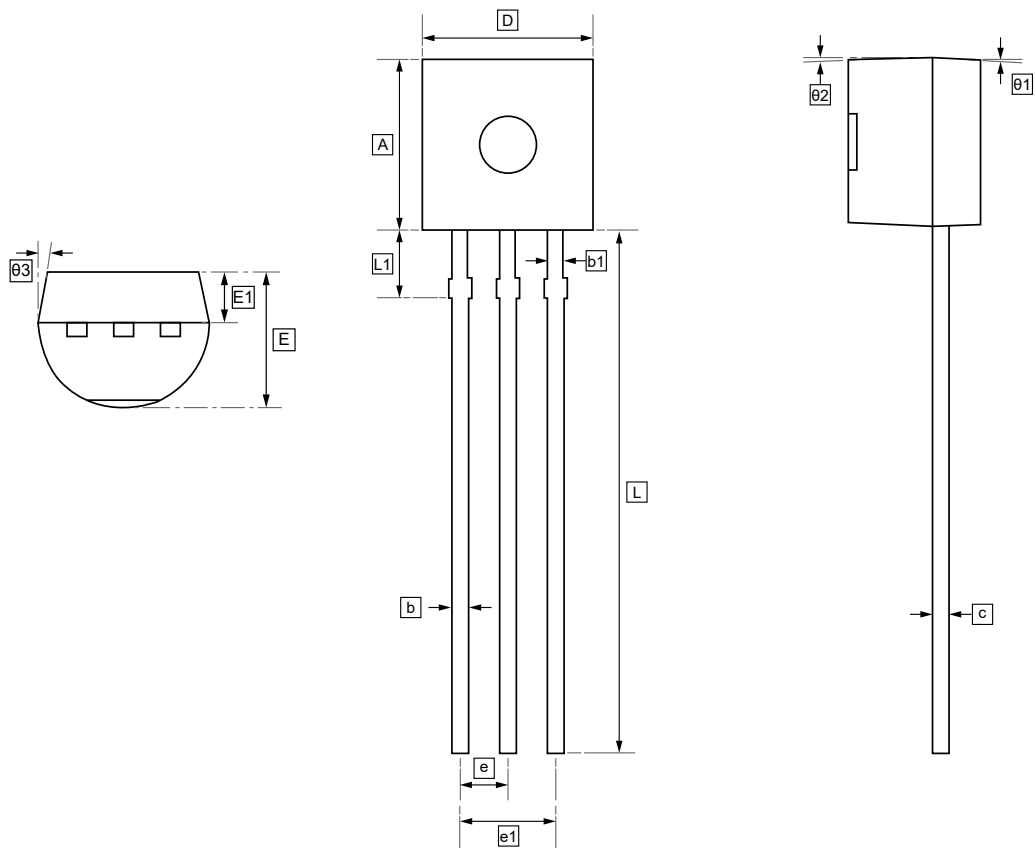


DIMENSIONS (mm are the original dimensions)

Symbol	A	b	b1	c	D	E	E1	e	e1	L	L1	θ1
Min	4.5	0.38	0.46	0.36	4.5	3.45	1.2	1.27	2.54	13.5	1.96	2°
Max	4.7	0.56		0.51	4.7	3.75	1.4			15.3		

Symbol	θ2	θ3
Min	2°	5°
Max		



13.Ordering information



yy: Year Code
ww: Week Code

Order Code	Marking	Package	Base QTY	Delivery Mode	Accuracy
UMW TL431 0.5%	TL431	TO-92	2000	Ammo outfit	0.5%
UMW TL431(0.5%)	TL431A	TO-92	1000	Bulk Bag	0.5%
UMW TL431	431	SOT-23	3000	Tape and reel	0.5%
UMW TL431 1%	431	SOT-23	3000	Tape and reel	1%
UMW TL431S	TL431	SOT-89	1000	Tape and reel	0.5%
UMW TL431AIPK	TL431	SOT-89	1000	Tape and reel	1%
UMW TL431AIDR	TL431A	SOP-8	2500	Tape and reel	1%
UMW TL431BIDR	TL431B	SOP-8	2500	Tape and reel	0.5%



14.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.