



### Features

- Epitaxial planar die construction
- Built-in biasing resistors ( $R_1$ : 4.7k $\Omega$ ,  $R_2$ : 4.7k $\Omega$ )
- Also available in lead free version
- RoHS compliant with Halogen-free



### Mechanical Data

- Case: SOT-23
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

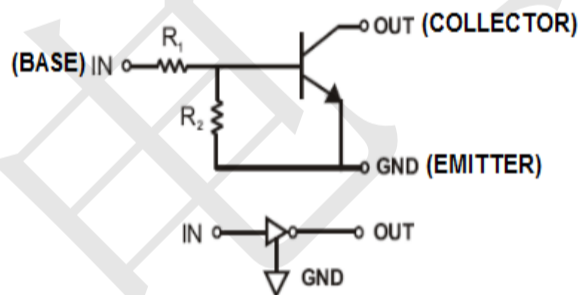

### Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

| Parameter                  | Symbol              | Value      | Unit             |
|----------------------------|---------------------|------------|------------------|
|                            |                     | SOT-23     |                  |
| Supply Voltage             | $V_{CC}$            | 50         | V                |
| Input Voltage              | $V_i$               | -10 to +30 | V                |
| Output Current             | $I_o$               | 100        | mA               |
| Collector Current          | $I_{C(\text{Max})}$ | 100        | mA               |
| Power Dissipation          | $P_D$               | 200        | mW               |
| Junction Temperature Range | $T_J$               | -55 ~ +150 | $^\circ\text{C}$ |
| Storage Temperature Range  | $T_{STG}$           | -55 ~ +150 | $^\circ\text{C}$ |

### Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

| Parameter              | Symbol              | Test Condition                                                 | Min. | Typ. | Max. | Unit          |
|------------------------|---------------------|----------------------------------------------------------------|------|------|------|---------------|
| Input Voltage          | $V_{I(\text{OFF})}$ | $V_{CC} = 5\text{V}, I_O = 100\mu\text{A}$                     | 0.5  | -    | -    | V             |
| Input Voltage          | $V_{I(\text{ON})}$  | $V_O = 0.3\text{V}, I_O = 20\text{mA}$                         | -    | -    | 3    | V             |
| Output Voltage         | $V_{O(\text{on})}$  | $I_O = 10\text{mA}, I_I = 0.5\text{mA}$                        | -    | -    | 0.3  | V             |
| Input Current          | $I_I$               | $V_I = 5\text{V}$                                              | -    | -    | 1.8  | mA            |
| Output Current         | $I_{O(\text{off})}$ | $V_{CC} = 50\text{V}, V_I = 0\text{V}$                         | -    | -    | 0.5  | $\mu\text{A}$ |
| DC Current Gain        | $G_I$               | $V_O = 5\text{V}, I_O = 10\text{mA}$                           | 20   | -    | -    | -             |
| Input Resistor         | $R_1$               |                                                                | 3.29 | 4.7  | 6.11 | k $\Omega$    |
| Resistance ratio       | $R_2/R_1$           |                                                                | 0.8  | 1.0  | 1.2  | -             |
| Gain-Bandwidth Product | $f_T$               | $V_{CE} = 10\text{V}, I_E = 5\text{mA}$<br>$f = 100\text{MHz}$ | -    | 250  | -    | MHz           |

## Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

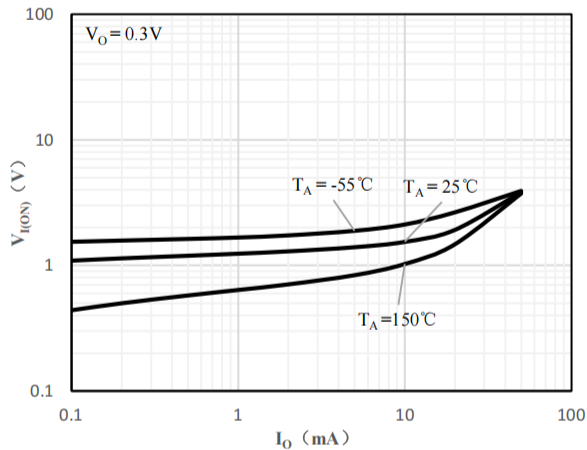


Fig 1 Input Voltage vs Output Current

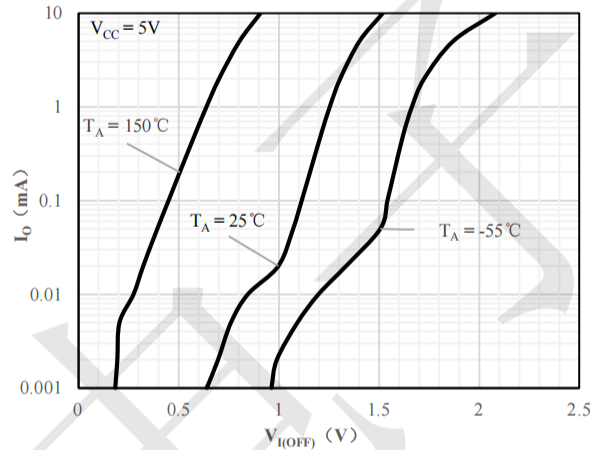


Fig 2 Output Current vs Input Voltage

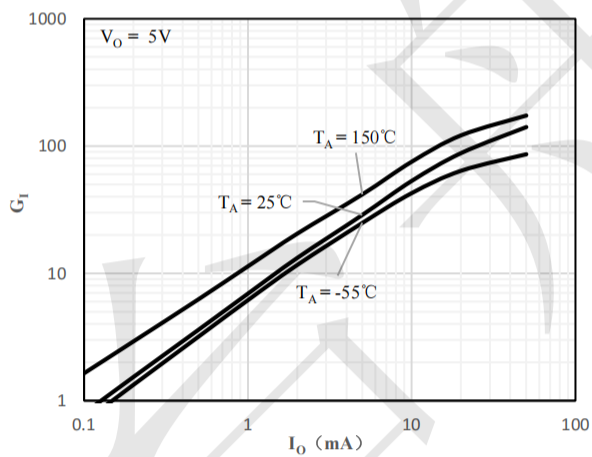


Fig 3 DC Current Gain vs Output Current


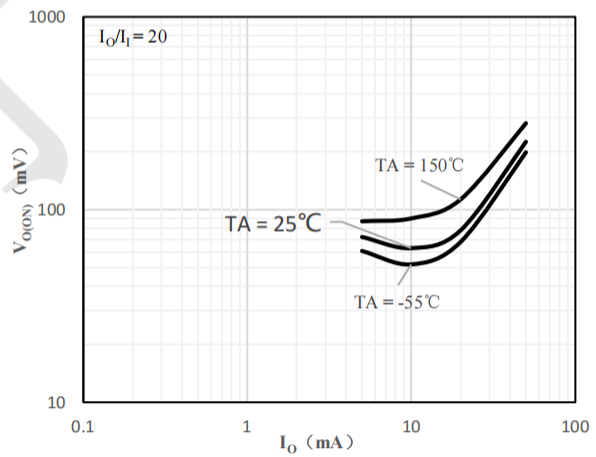


Fig 4 Output Voltage vs Output Current


### PACKAGE OUTLINE

#### SOT-23

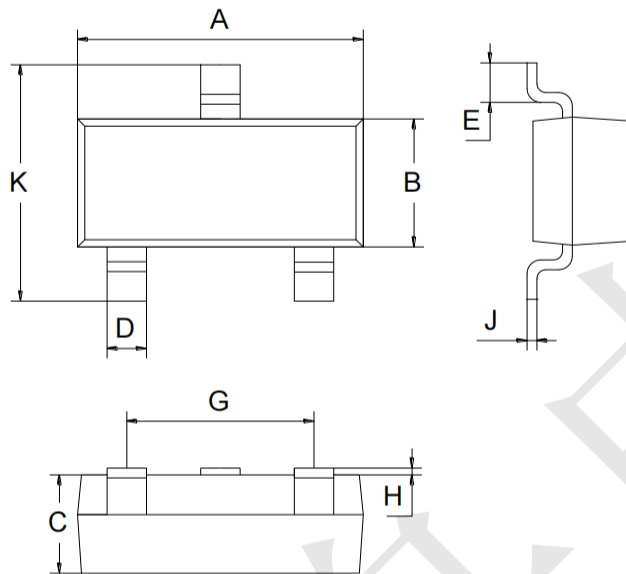

| SOT-23               |      |      |
|----------------------|------|------|
| Dim                  | Min  | Max  |
| A                    | 2.70 | 3.10 |
| B                    | 1.10 | 1.50 |
| C                    | 0.90 | 1.10 |
| D                    | 0.30 | 0.50 |
| E                    | 0.35 | 0.48 |
| G                    | 1.80 | 2.00 |
| H                    | 0.02 | 0.10 |
| J                    | 0.05 | 0.15 |
| K                    | 2.20 | 2.60 |
| All Dimensions in mm |      |      |

### SOLDERING FOOTPRINT

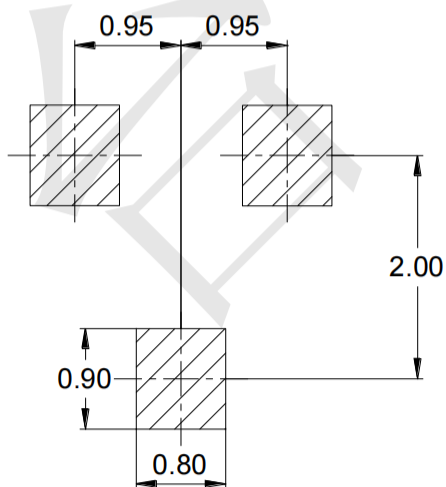

Unit : mm