

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

REVERSE VOLTAGE - **20** to **200** Volts


FORWARD CURRENT - **3.0** Amperes

FEATURES

- Metal-Semiconductor junction with gard ring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low vlotage, high frequency inverters, free wheeling, and polarity protection applications

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

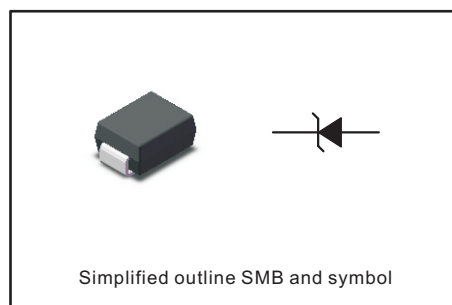







MECHANICAL DATA

- Case: Molded Plastic
- Polarity:Color band denotes cathode

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


	SYMBOLS	SS32	SS33	SS34	SS35	SS36	SS38	SS310B	SS315	SS320	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	VOLTS
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	VOLTS
Maximum average forward rectified current at T _L (see fig.1)	I _{AV}	3.0									Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	100.0									Amps
Maximum instantaneous forward voltage at 3.0A	V _F	0.45	0.55		0.70		0.85				Volts
Maximum DC reverse current T _A =25°C	I _R	0.5									mA
at rated DC blocking voltage T _A =100°C		20			10						
Typical junction capacitance (NOTE 1)	C _J	500			300					pF	
Typical thermal resistance (NOTE 2)	R _{qJA}	55.0									°C/W
Operating junction temperature range	T _J	-65 to +125			-65 to +150					°C	
Storage temperature range	T _{STG}	-65 to +150									°C

Note:1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2.P.C.B. mounted with 0.4x0.4"(10x10mm) copper pad areas

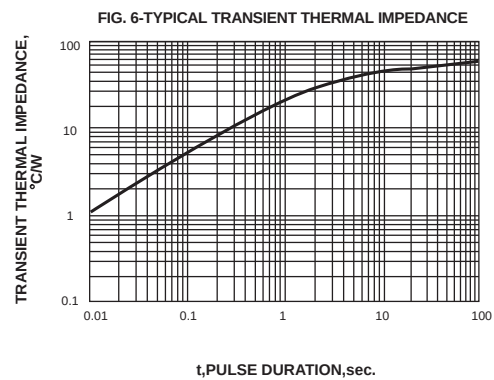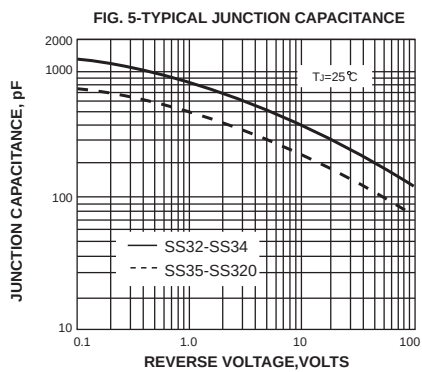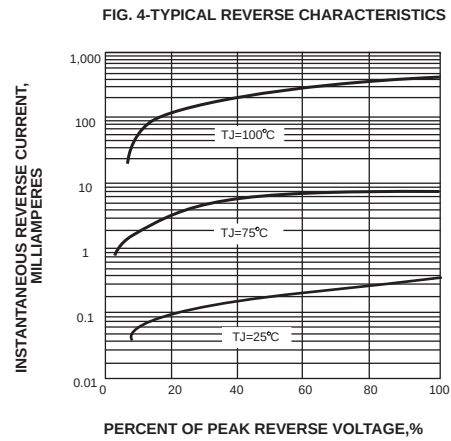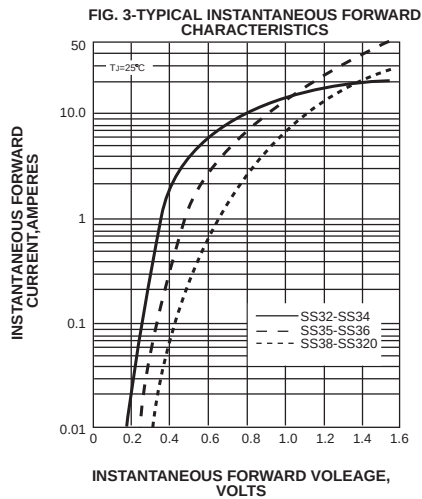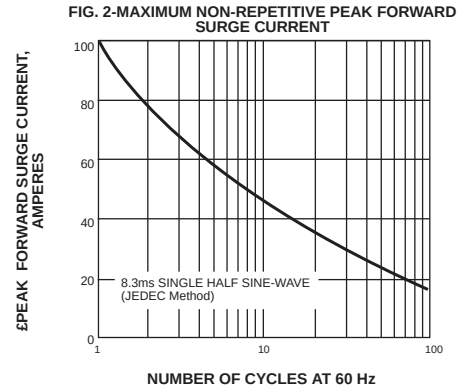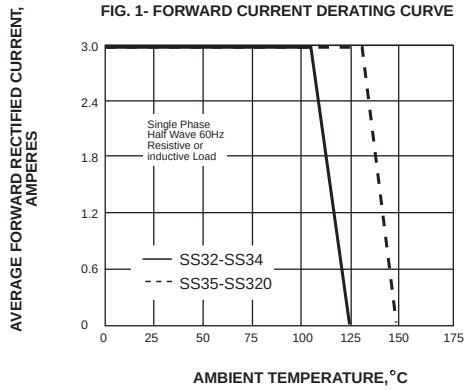

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

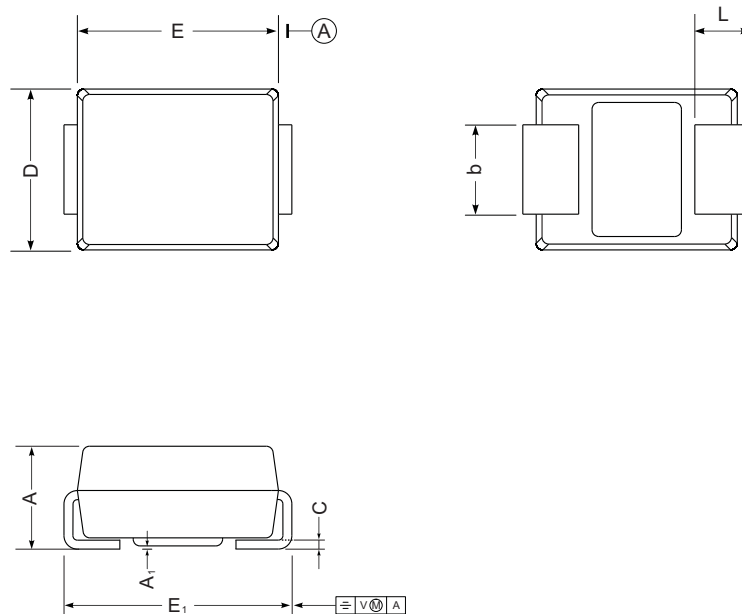

SMB mechanical data

UNIT		A	E	D	E ₁	A ₁	L	C	b
mm	max	2.44	4.70	3.94	5.59	0.20	1.5	0.305	2.11
	min	2.13	4.06	3.3	5.08	0.05	0.8	0.152	1.91
mil	max	96	185	155	220	7.9	59	12	83
	min	84	160	130	200	2.0	32	6	75

The recommended mounting pad size

