


**PRODUCT  
DATASHEET**

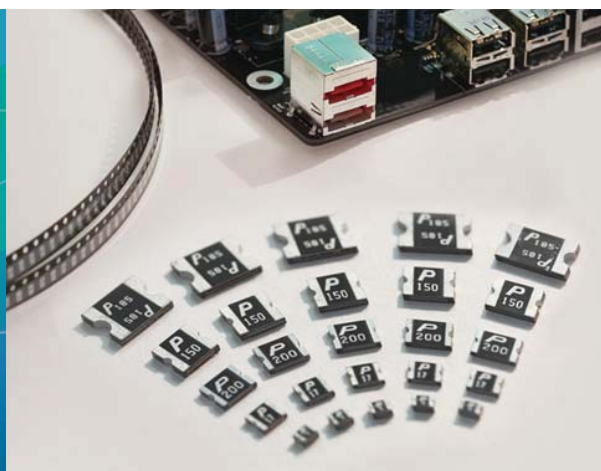

**SPR-P Series Surface Mount PTC Devices**

## SPR-P Series Surface Mount PTC Devices

### Description

The SPR-P series provides miniature surface mount resettable overcurrent protection with holding current from 0.75A to 2.60A. This series is suitable for ultra portable applications where space is at a premium and the device current is low.

### Features





- RoHS compliant and lead-free
- Low profile
- Halogen-free
- Fast response to fault current
- Compact design saves board space
- Compatible with high temperature solders

### Applications



- Motherboard USB
- IC VCC protection
- Mobile Internet Device (MID)
- Set-top-box and HDMI
- Portable MP3 and media player
- Game console port protection
- USB hubs, ports and peripherals



### Agency Approval and Environmental Compliance

Agency	File Number	Regulation	Standard
	E201431		2011/65/EU
	R50099121		IEC 61249-2-21:2003

### Electrical Characteristics

Part Number	I <sub>hold</sub> (A)	I <sub>trip</sub> (A)	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	P <sub>d typ</sub> (W)	Maximum Time To Trip		Resistance		Agency Approval	
						Current (A)	Time (Sec.)	R <sub>min</sub> (Ω)	R <sub>1max</sub> (Ω)		
SPR-P075	0.75	1.50	6	50	0.6	8.00	0.20	0.050	0.150	✓	✓
SPR-P110	1.10	1.80	6	50	0.6	8.00	0.30	0.040	0.120	✓	✓
SPR-P150	1.50	3.00	6	50	0.6	8.00	0.50	0.024	0.085	✓	✓
SPR-P175	1.75	3.50	6	50	0.6	8.00	0.60	0.018	0.063	✓	✓
SPR-P200T	2.00	4.00	6	50	0.6	8.00	1.00	0.014	0.049	✓	✓
SPR-P260T	2.60	5.20	6	50	0.6	8.00	4.00	0.010	0.035	✓	✓

## SPR-P Series Surface Mount PTC Devices

### Note on Electrical Characteristics

#### ■ Vocabulary

- $I_{hold}$  = Hold current: maximum current device will pass without tripping in 23°C still air.
- $I_{trip}$  = Trip current: minimum current at which the device will trip in 23 °C still air.
- $V_{max}$  = Maximum voltage device can withstand without damage at rated current ( $I_{max}$ )
- $I_{max}$  = Maximum fault current device can withstand without damage at rated voltage ( $V_{max}$ )
- $P_{d\ typ}$  = Typical power dissipated from device when in the tripped state at 23 °C still air.
- $R_{min}$  = Minimum resistance of device in initial (un-soldered) state.
- $R_{1max}$  = Maximum resistance of device at 23 °C measured one hour after tripping or reflow soldering of 260 °C for 20 sec.

- Value specified is determined by using the PWB with 0.030"\*1.5oz copper traces.
- Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.
- Specifications are subject to change without notice.

### Polymeric PTC Selecting Guide

- Determine the following operating parameters for the circuits:
  - Normal operating current ( $I_{hold}$ )
  - Maximum interrupt current ( $I_{max}$ )
  - Maximum circuit voltage ( $V_{max}$ )
  - Normal operating temperature surrounding device (min°C/max°C)
- Select the device form factor and dimension suitable for the application:
  - Surface Mount Device (SMD)
  - Axial Leaded Device (ALD)
  - Other Customized Form Factors
  - Radial Leaded Device (RLD)
  - DISC Device
- Compare the maximum rating for  $V_{max}$  and  $I_{max}$  of the PPTC device with the circuit in application and make sure the circuit's requirement does not exceed the device rating.
- Check that PPTC device's trip time (time-to-trip) will protect the circuit.
- Verify that the circuit operating temperature is within the PPTC device's normal operating temperature range.
- Verify the performance and suitability of the chosen PPTC device in the application.

### **⚠ WARNING**

#### ■ Mechanical Stress

- PPTC devices will undergo a thermal expansion during fault condition. If PPTC devices are installed or placed in an application where the space between PPTC devices and the surrounding materials (e.g., covering materials, packaging materials, encapsulate materials and the like) is insufficient, it will cause an inhibiting effect upon the thermal expansion. Pressing, twisting, bending and other kinds of mechanical stress will also adversely affect the performance of the PPTC devices, and shall not be used or applied.

#### ■ Chemical Pollutants

- Silicone-based oils, oils, solvents, gels, electrolytes, fuels, acids, and the like will adversely affect the properties of PPTC devices, and shall not be used or applied.

#### ■ Electronic and Thermal Effect


- PPTC devices are secondary protection devices and are used solely for sporadic, accidental over-current or over-temperature error condition, and shall NOT be used if or when constant or repeated fault conditions (such fault conditions may be caused by, among others, incorrect pin-connection of a connector) or over-extensive trip events may occur.
- PPTC devices are different from fuses and, when a fault condition occurs, will go into high-resistance state and do not open circuit, in which case the voltage at such PPTC devices may reach a hazardous level.
- Operation over the maximum rating or other forms of improper use may cause failure, arcing, flame and/or other damage to the PPTC devices.
- Conductive material contamination, such as metal particle, may induce shortage, flame or arcing.
- Due to the inductance, the operation circuits may generate a circuit voltage ( $L di/dt$ ) above the rated voltage of PPTC devices, which shall not be used under such circumstances.

#### ■ General

- Customers shall evaluate and test the properties of PPTC devices independently to verify and ensure that their individual applications will be met.
- The performance of PPTC devices will be adversely affected if they are improperly used under electronic, thermal and/or mechanical procedures and/or conditions non-conformant to those recommended by manufacturer.
- Customers shall be responsible for determining whether it is necessary to have back-up, failsafe and/or fool-proof protection to avoid or minimize damage that may result from extra-ordinary, irregular function or failure of PPTC devices.
- Any and all responsibilities and liabilities are disclaimed if any item under this notice of warning is not complied with.
- Polytronics shall not be liable for any claims or damages arising out of products used in automotive applications, unless otherwise agreed by Polytronics.

## SPR-P Series Surface Mount PTC Devices

### Thermal Derating Curve

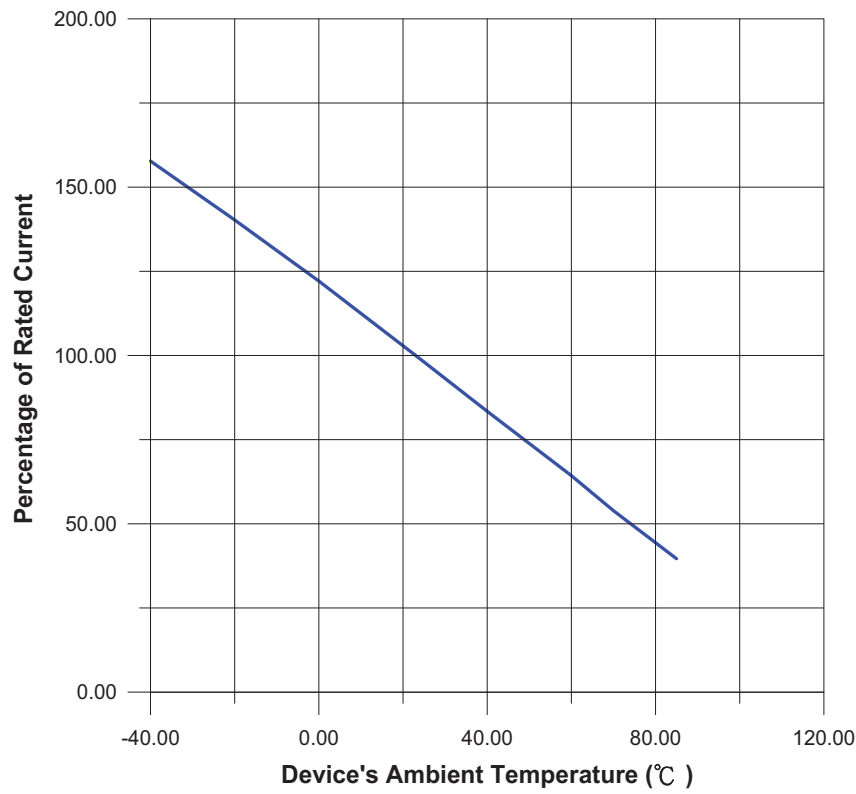


### Thermal Derating Chart

#### Recommended Hold Current (A) at Ambient Temperature (°C)

Part Number	Ambient Operation Temperature								
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C
SPR-P075	1.15	1.00	0.85	0.75	0.55	0.45	0.40	0.30	0.20
SPR-P110	1.70	1.50	1.30	1.10	0.85	0.70	0.60	0.50	0.30
SPR-P150	2.25	2.00	1.75	1.50	1.15	1.00	0.85	0.65	0.45
SPR-P175	2.60	2.30	2.00	1.75	1.30	1.15	0.95	0.75	0.50
SPR-P200T	3.10	2.75	2.40	2.00	1.65	1.40	1.15	0.95	0.65
SPR-P260T	3.80	3.30	2.90	2.60	2.20	1.95	1.75	1.50	1.05


## SPR-P Series Surface Mount PTC Devices

**Average Time-Current Curve**

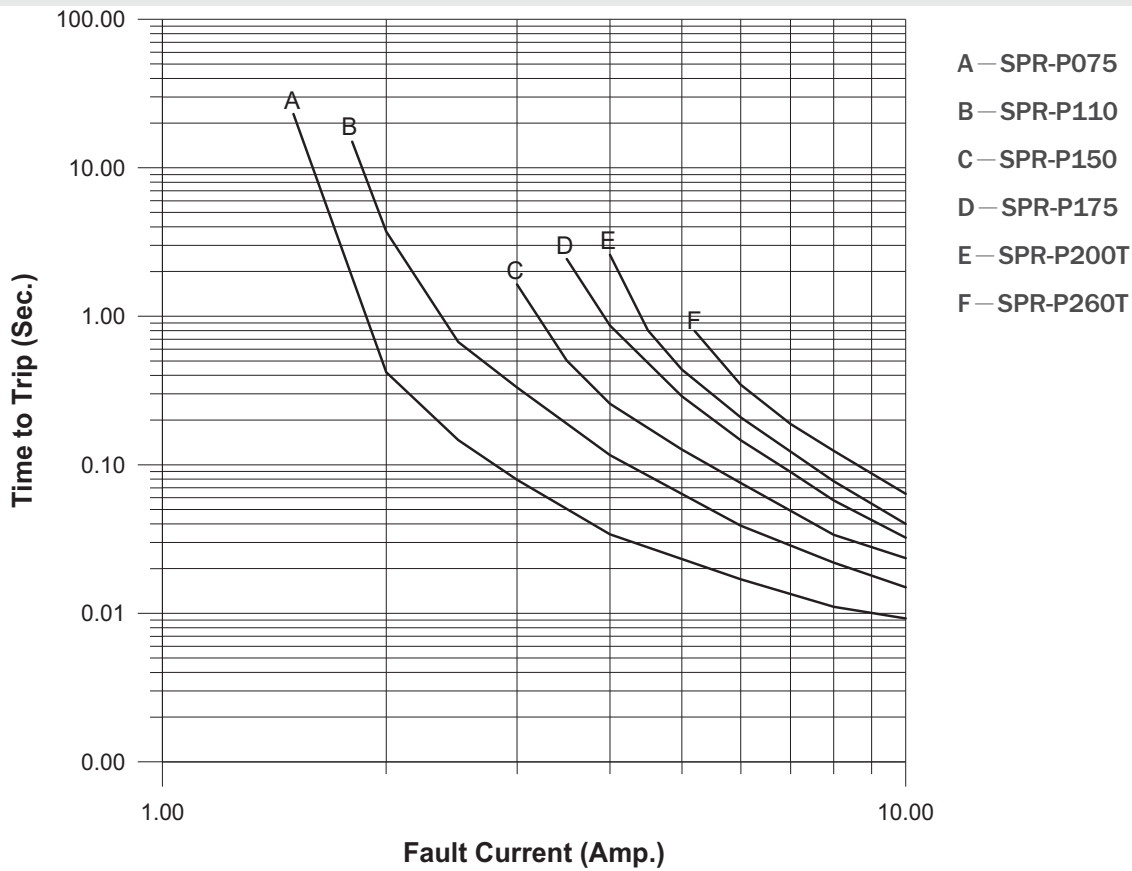

## SPR-P Series Surface Mount PTC Devices

### Soldering Parameters

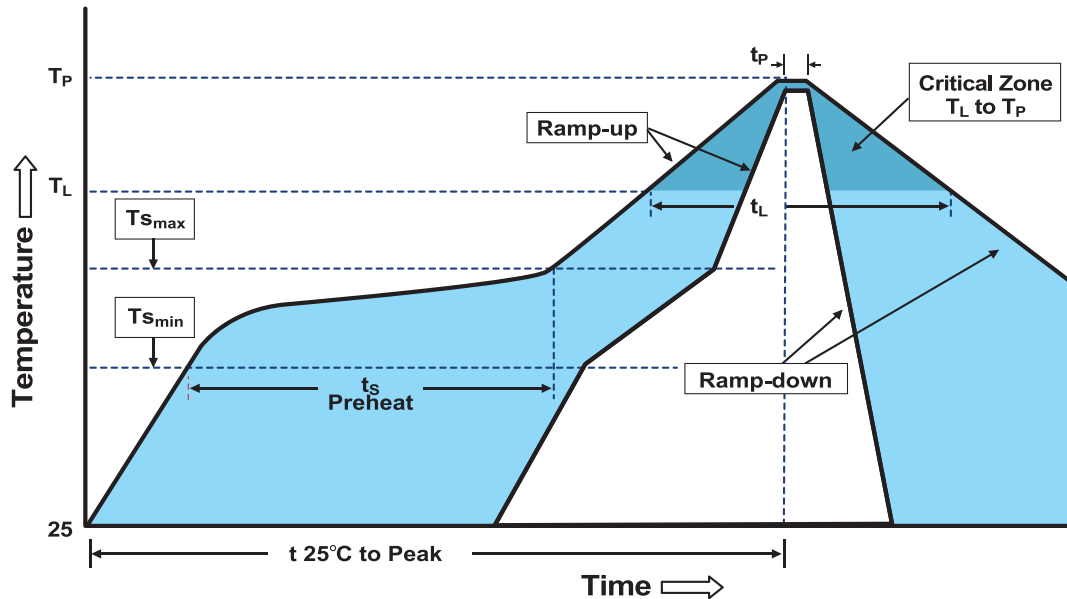

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (Tsmmax to Tp)	3°C/second max.
Preheat	
-Temperature Min (Tsmmin)	150°C
-Temperature Max (Tsmmax)	200°C
-Time (Tsmmin to Tsmmax)	60-180 seconds
Time maintained above:	
-Temperature (Tl)	217°C
-Time (tL)	60-150 seconds
Peak Temperature (Tp)	260°C
Time within 5°C of actual Peak Temperature (tp)	20-40 seconds
Ramp-Down Rate	6 °C /second max.
Time 25°C to Peak Temperature	8 minutes max.
Storage Condition	0°C ~35°C, ≤ 70%RH


- Recommended reflow methods: IR, vapor phase oven, hot air oven, N<sub>2</sub> environment for lead-free
- Recommended maximum paste thickness is 0.25mm (0.010 inch)
- Devices can be cleaned using standard industry methods and solvents.

**Note 1:** All temperature refer to topside of the package, measured on the package body surface.

**Note 2:** If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

## SPR-P Series Surface Mount PTC Devices

### Physical Dimensions (mm.)

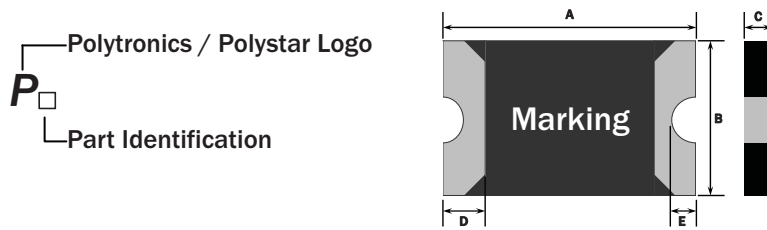

Part Number	A		B		C		D		E	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
SPR-P075	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45
SPR-P110	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45
SPR-P150	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45
SPR-P175	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45
SPR-P200T	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45
SPR-P260T	2.00	2.20	1.20	1.50	0.40	0.75	0.20	0.55	0.05	0.45


### Environmental Specifications

Operating Temperature	-40°C to +85 °C
Maximum Device Surface Temperature in Tripped State	125°C
Passive Aging	+85°C , 1000 hours < R1max
Humidity Aging	+85°C , 85%R.H. 1000 hours < R1max
Thermal Shock	MIL-STD-202 Method 107G +85°C /-40°C 20 times < R1max
Solvent Resistance	MIL-STD-202, Method 215 No change
Vibration	MIL-STD-883C, Method 2007.1, Condition A No change
Moisture Sensitivity Level	Level 1, J-STD-020C

## SPR-P Series Surface Mount PTC Devices

### Packaging Quantity and Marking

Recommended Pad Layout (mm.)

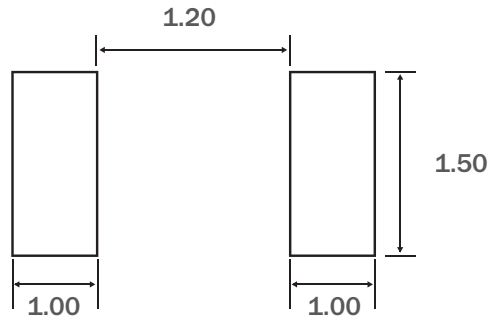

Part Number	Marking	Quantity
SPR-P075	N	4000
SPR-P110	I	4000
SPR-P150	K	4000
SPR-P175	T	4000
SPR-P200T	L	4000
SPR-P260T	U	4000

◎ 8 mm tape on 7 inch reel per EIA-481 (equivalent to IEC286, part 3)

### Physical Specifications

Terminal Material	Solder-Plated Copper (Solder Material: Matte Tin (Sn))
Lead Solderability	Meets EIA Specification RS186-9E, ANSI/J-STD-002 Category 3.




## SPR-P Series Surface Mount PTC Devices

### Tape Specifications: EIA-481 (mm.)

W	8.00 ± 0.10
F	3.50 ± 0.05
E <sub>1</sub>	1.75 ± 0.10
D <sub>0</sub>	1.55 ± 0.05
D <sub>1</sub>	1.00 (min)
P <sub>0</sub>	4.00 ± 0.08
P <sub>1</sub>	4.00 ± 0.10
P <sub>2</sub>	2.00 ± 0.05
A <sub>0</sub>	1.60 ± 0.10
B <sub>0</sub>	2.30 ± 0.10
T	0.25 ± 0.10
K <sub>0</sub>	0.90 ± 0.10
Leader min.	390
Trailer min.	160

### Reel Dimensions: EIA-481 (mm.)


C	Ø178 ± 1.0
D	Ø60.2 ± 0.5
H	11.0 ± 0.5
W	9.0 ± 1.5

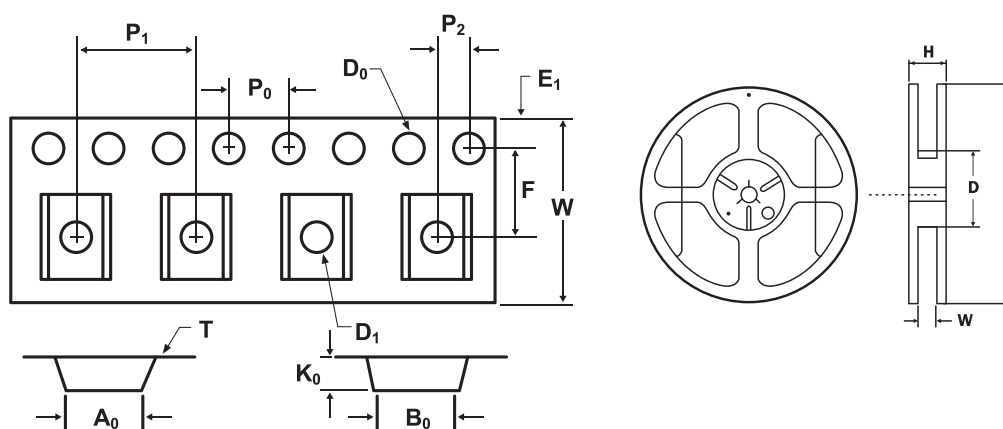

## SPR-P Series Surface Mount PTC Devices

### Part Number System

SPR - P □□□ T

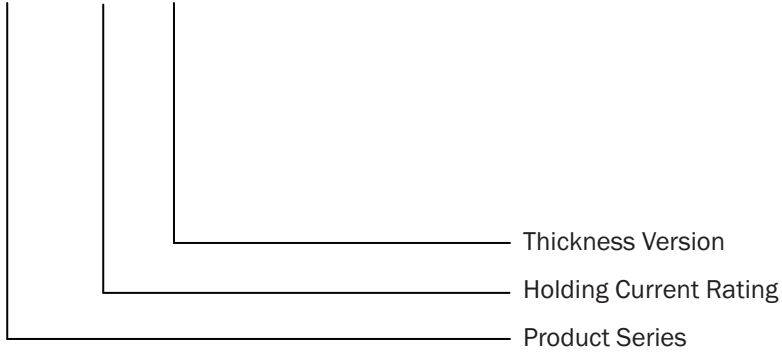

SPR-P = 0805 Surface Mount PTC Devices

### Cross Reference

Polytronics / EVERFUSE <sup>®</sup>	Cross Reference		
	Littelfuse / Polyfuse <sup>®</sup>	TE / PolySwitch <sup>®</sup>	Bourns / Multifuse <sup>®</sup>
SPR-P075	0805L075UL	-	-
SPR-P110	0805L110UL	-	-
SPR-P150	0805L150UL	-	-
SPR-P175	0805L175UL	-	-
SPR-P200T	0805L200ULTH	-	-
SPR-P260T	0805L260ULTH	-	-

“EVERFUSE” is a registered trademark of Polytronics Technology Corp.

“Polyfuse” is a registered trademark of Littelfuse, Inc.

“Multifuse” is a registered trademark of Bourns, Inc.

“PolySwitch” is a registered trademark of TE Connectivity Ltd.