


40V, 3A, Adjustable Voltage Regulator

Features

- Typical 1% Output Voltage Tolerance
- Output voltage adjustable from 1.20V ~37V
- Output current in excess of 3.0A
- Internal short circuit protection
- Internal over temperature protection
- Output transistor safe area compensation

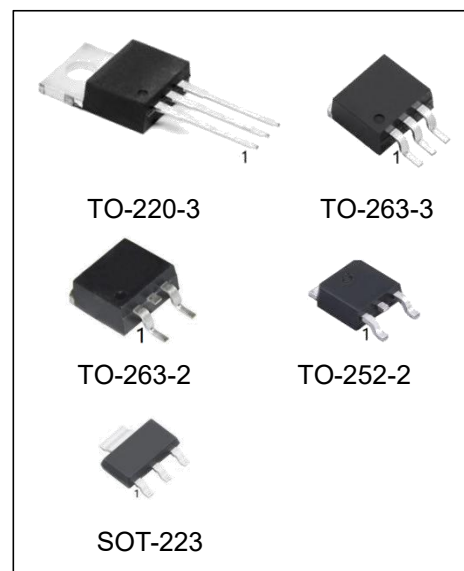

Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
LM350HT//HG	TO-220-3	LM350H	TUBE	1000pcs/box
LM350HS/TR-HG	TO-263-3	LM350H	REEL	500pcs/reel
LM350HS2/TR-HG	TO-263-2	LM350H	REEL	500pcs/reel
LM350HDT/TR-HG	TO-252-2	LM350H	REEL	2500pcs/reel
LM350HMP/TR-HG	SOT-223	LM350H	REEL	2500pcs/reel
LM350AHT/HG	TO-220-3	LM350AH	TUBE	1000pcs/box
LM350AHS/TR-HG	TO-263-3	LM350AH	REEL	500pcs/reel
LM350AHS2/TR-HG	TO-263-2	LM350AH	REEL	500pcs/reel
LM350AHDT/TR-HG	TO-252-2	LM350AH	REEL	2500pcs/reel
LM350AHMP/TR-HG	SOT-223	LM350AH	REEL	2500pcs/reel


General Description

The LM350H is an adjustable 3-terminal positive voltage regulator capable of supplying in excess of 1.5A over an output voltage range of 1.20 V to 37 V. This voltage regulator is exceptionally easy to use and requires only two external resistors to set the output voltage. Further, it employs internal current limiting, thermal shutdown and safe area compensation, making it essentially blow-out proof.

The LM350H serves a wide variety of applications including local, on card regulation. This device can also be used to make a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the LM350H can be used as a precision current regulator.

The LM350H series are packaged in TO220-3, TO252-2, TO263-3 and TO263-2.

Pin Description

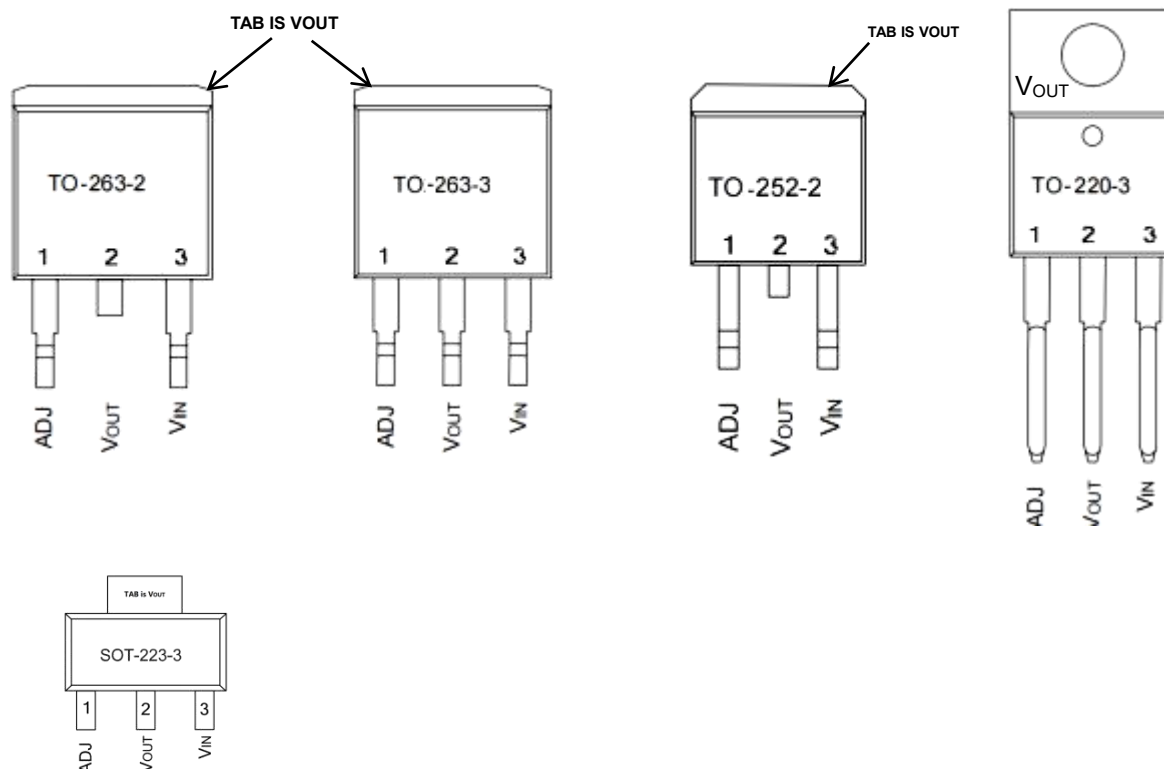

PIN	NAME	I/O	DESCRIPTION
1	ADJ	-	Adjust pin
2, TAB	V _{OUT}	O	Output voltage pin for the regulator
3	V _{IN}	I	Input voltage pin for the regulator

Function Block


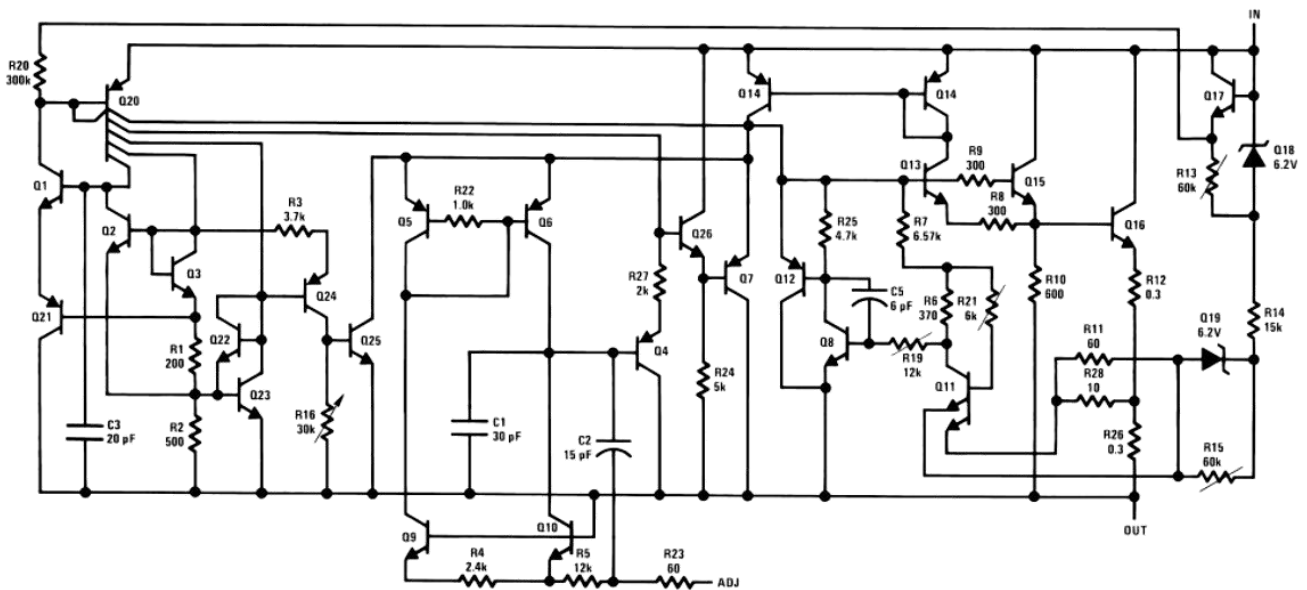


Figure1 Function Block Diagram of LM350H

Typical Application Circuit

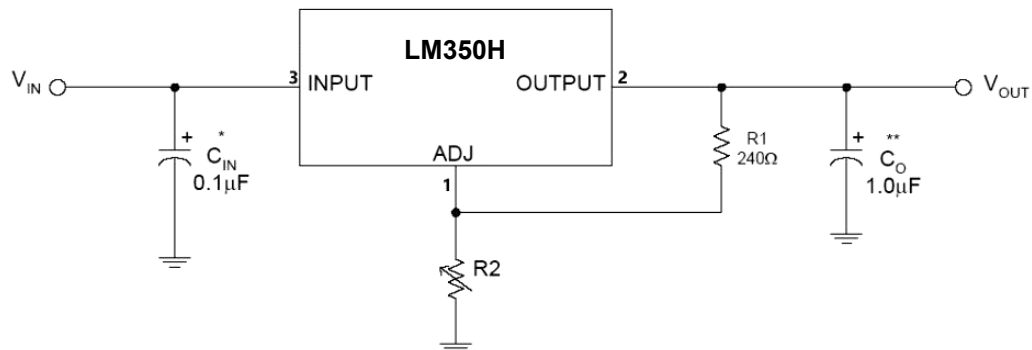

* = C_{IN} is required if the regulator is located near power supply filter.

** = C_O is needed for stability and it improves transient response.

$$V_{OUT} = V_{REF} \times (1 + R2/R1) + I_{ADJ} \times R2$$

Since I_{ADJ} is controlled to less than $100\mu A$, the error associated with this term is negligible in most applications.

Absolute Maximum Ratings(Ta=25°C)

Characteristic		Symbol	Min.	Max.	Unit
Supply Voltage		V _{CC}		40	V
Input - Output Voltage Difference		V _{IN} - V _{OUT}		37	V
Power Dissipation		P _d	Internal limited		
Maximum junction temperature		T _J		150	°C
Storage temperature		T _S	- 40	150	°C
Lead temperature (soldering, 10 sec)	TO-263/TO-220	T _{LEAD}		245	°C
	TO-252/SOT223	T _{LEAD}		260	°C
ESD (human body model)		ESD		4000	V
Operating temperature range ⁽¹⁾		T _A	-40	125	°C

Note: Stress greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

(1) Operating temperature range: -40°C to +125°C. This product is designed for industrial grade applications. For automotive grade versions compliant with AEC-Q100, please conduct internal screening per the standard or contact our sales team for availability.

Electrical Characteristics


(V_{IN}-V_{OUT}=5V, I_{OUT}=10mA, Ta=25°C, unless otherwise specified.) *

Characteristics	Test conditions	Symbol	Min.	Typ.	Max.	Unit
Reference voltage LM350H	10 mA ≤ I _{OUT} ≤ 3.0A	V _{REF}	1.20	1.25	1.30	V
Reference voltage LM350AH	3 V ≤ (V _{IN} - V _{OUT}) ≤ 37V P _D ≤ 20 W		1.237	1.25	1.263	
Line regulation	3 V ≤ V _{IN} - V _{OUT} ≤ 37V	SV		0.01	0.04	%/V
Load regulation	0 mA ≤ I _{OUT} ≤ 3.0A	Si		0.2	0.4	%
Adjust pin current		I _{adj}		50	100	μA
Adjust pin current change	3 V ≤ V _{IN} - V _{OUT} ≤ 37V, 10 mA ≤ I _{OUT} ≤ 3.0A, P _D ≤ 20W	ΔI _{adj}		0.2	5.0	μA
Minimum load current	V _{IN} - V _{OUT} = 37 V	I _{Lmin}		3.5	10.0	mA
Ripple rejection	f = 120 Hz, C _{OUT} = 1 μF tantalum, (V _{IN} -V _{OUT}) = 3V, I _{OUT} = 3.0A	RR	60	75		dB
Temperature stability	T _{MIN} ≤ T _J ≤ T _{MAX}			0.7		%
RMS output noise (%ofV _{OUT})	Ta = 25°C, 10 Hz ≤ f ≤ 10 k Hz	en		0.003		%
Thermal resistance, Junction to case	TO-263 TO-252 TO-220	θ _{JC}		42 12 5		°C/W
Thermal resistance, Junction to Ambient	TO-263 TO-252 TO-220	θ _{JA}		60 112 54		°C/W
Thermal shutdown hysteresis		Thys		25		°C


*: Maximum Power Dissipation is Package Type and Case Temperature dependent.

Application Information


Voltage regulator with protection diodes

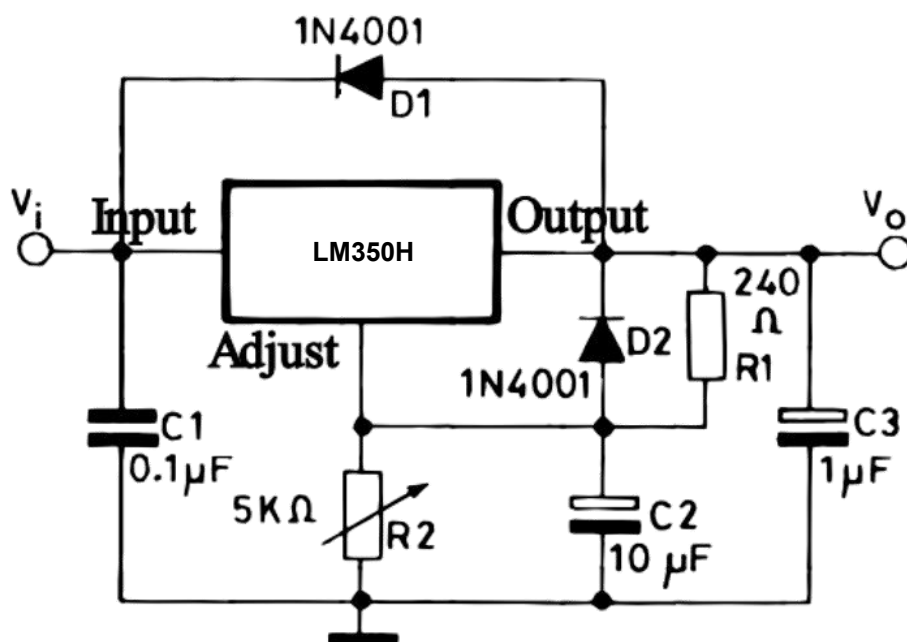


Slow turn-on 15 V regulator

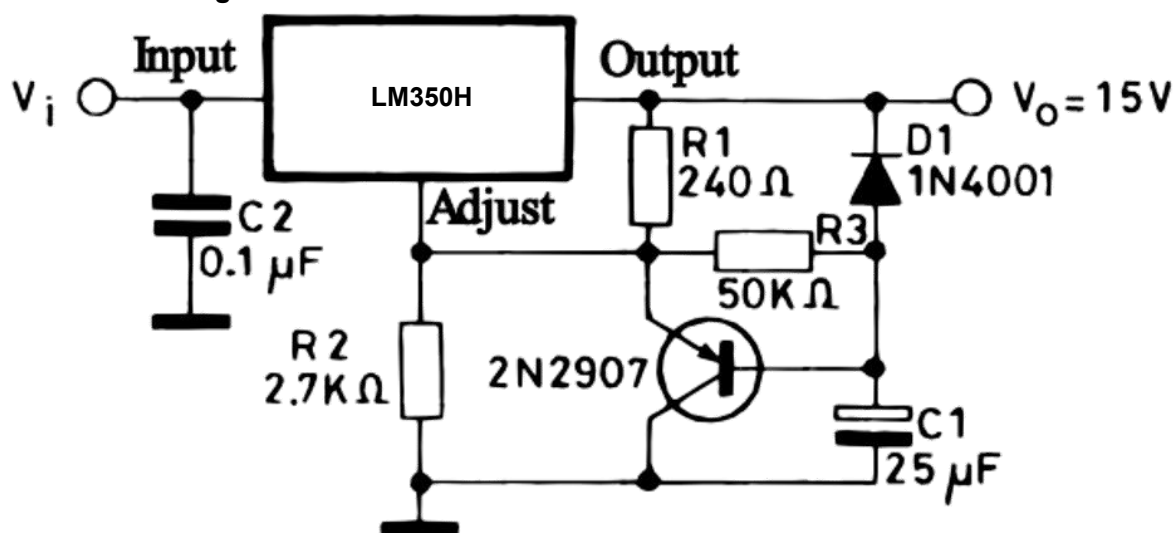


Current regulator

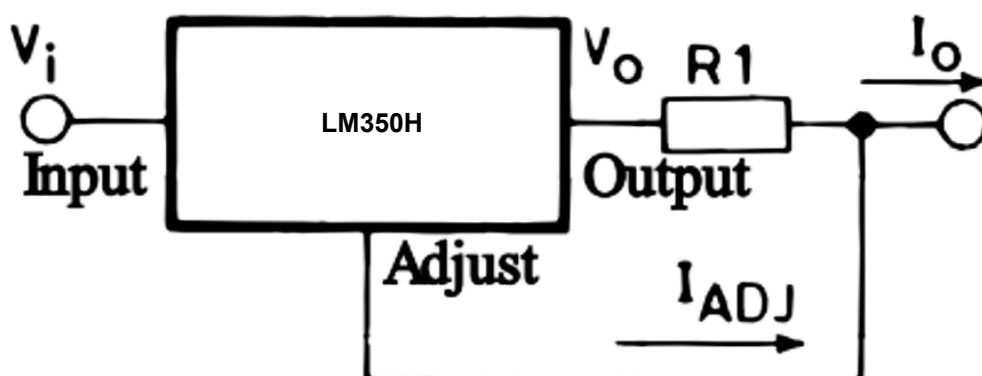


5V electronic shut-down regulator

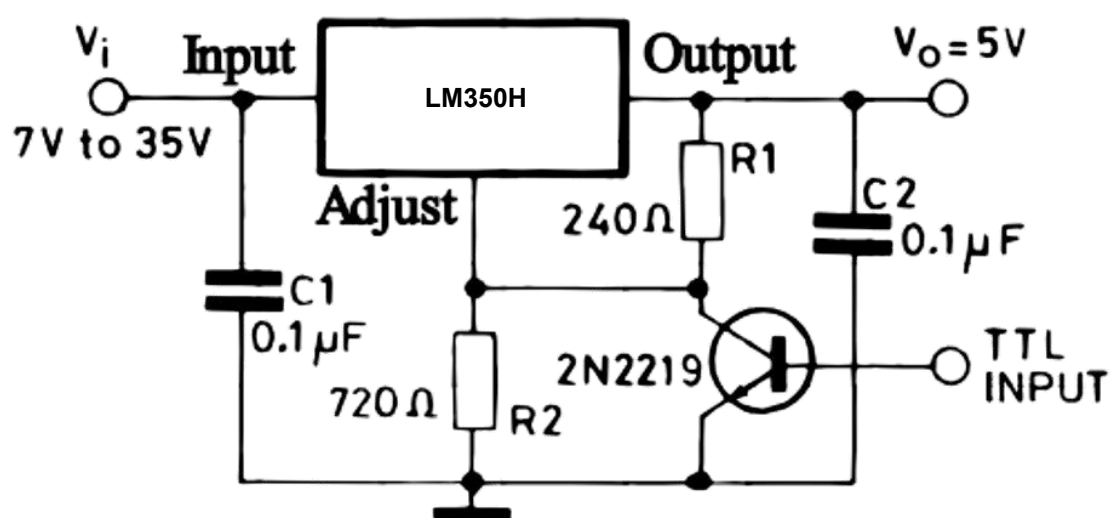


Characteristics Curves

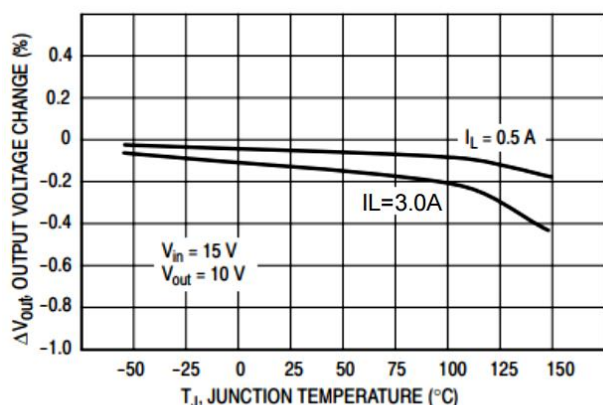


Load Regulation

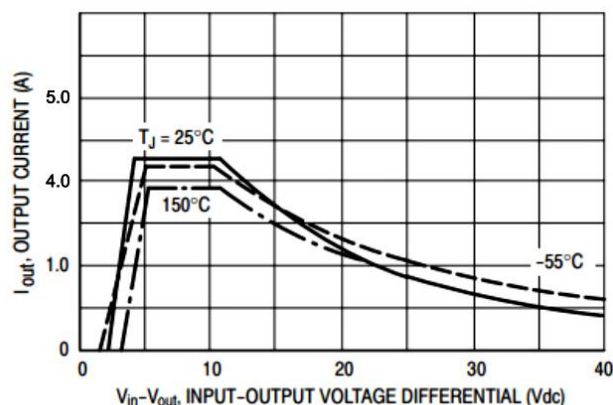


Current Limit

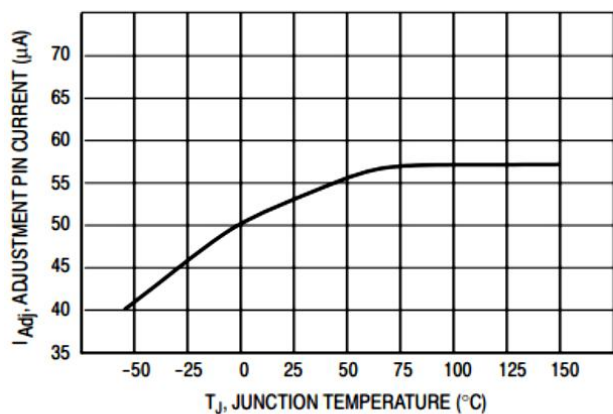


Adjustment Pin Current

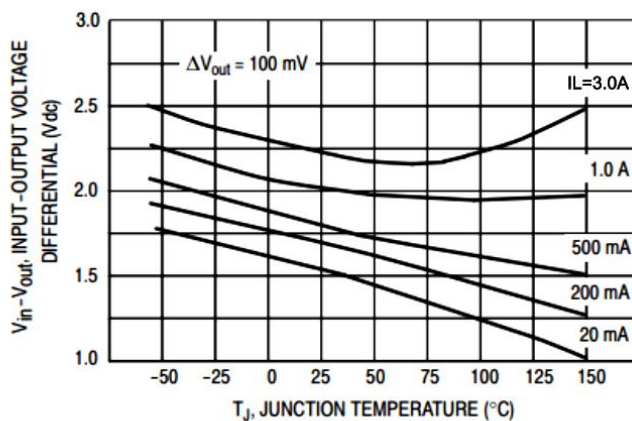


Dropout Voltage

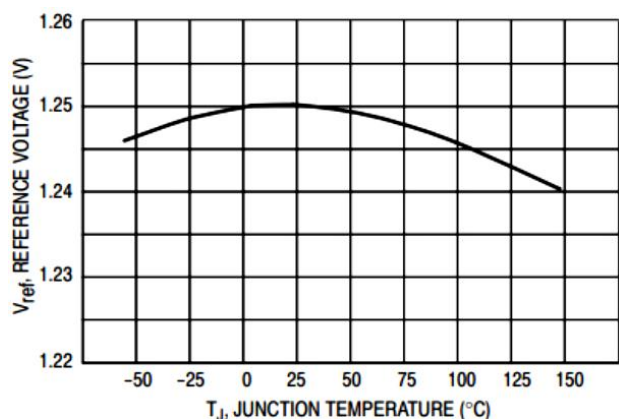


Temperature Stability

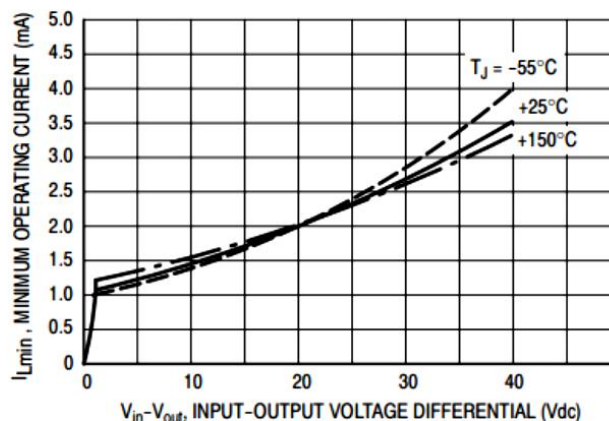


Minimum Operating Current

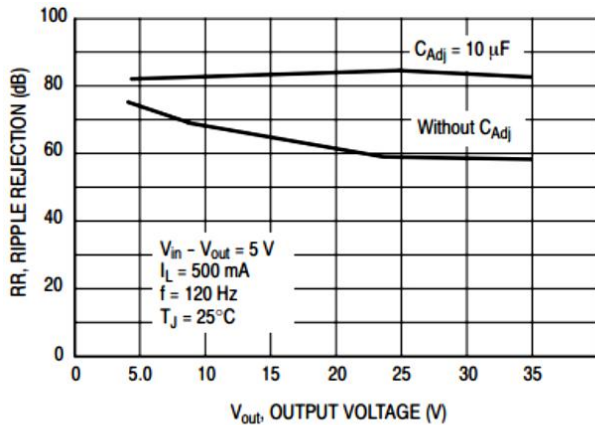


Ripple Rejection versus Output Voltage

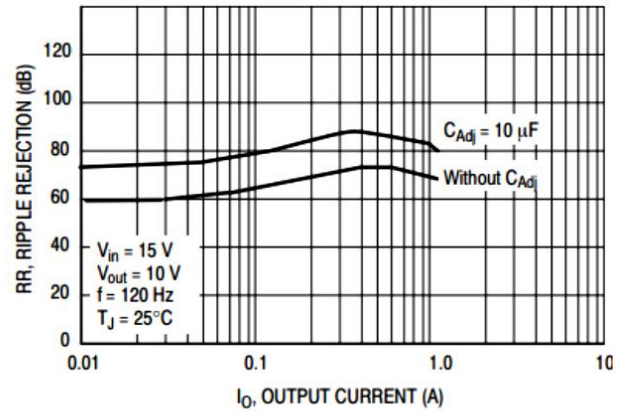


Ripple Rejection versus output Current

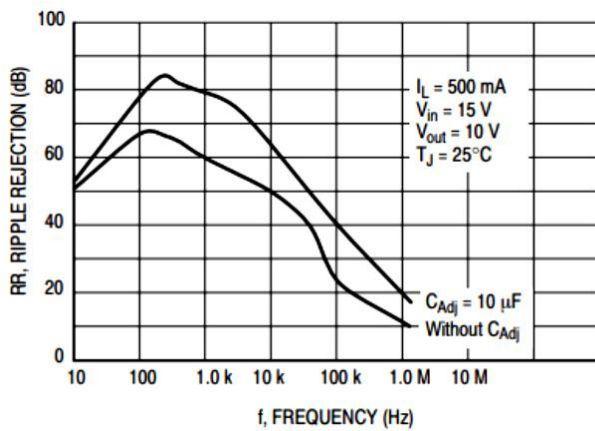


Ripple Rejection versus Frequency

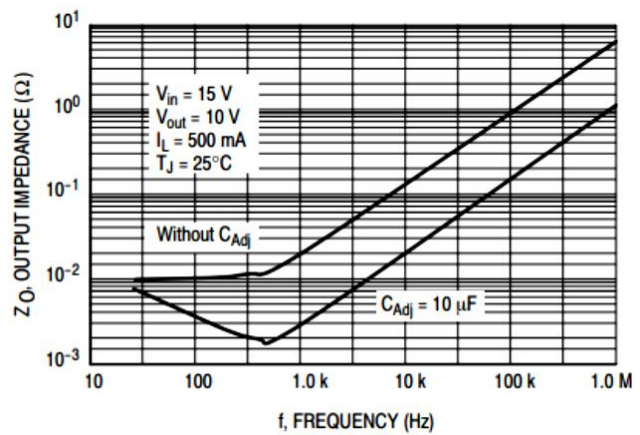

Output Impedance

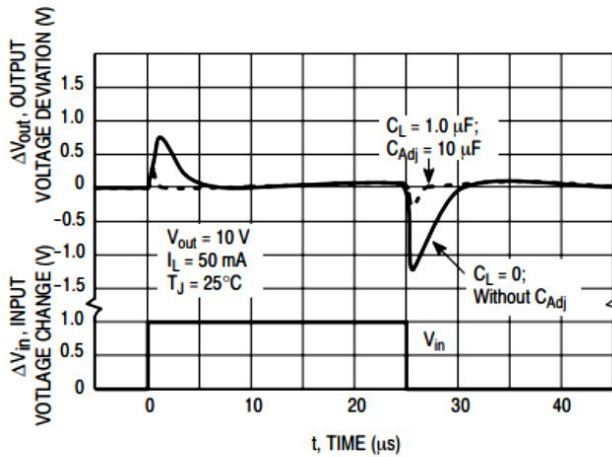


Line Transient Response

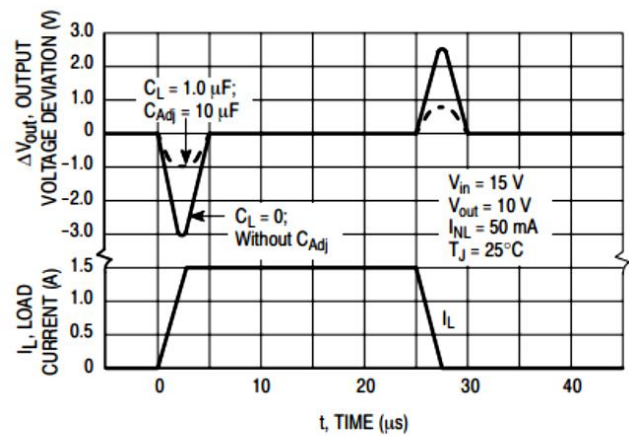

Load Transient Response

Physical Dimensions


TO-263-3

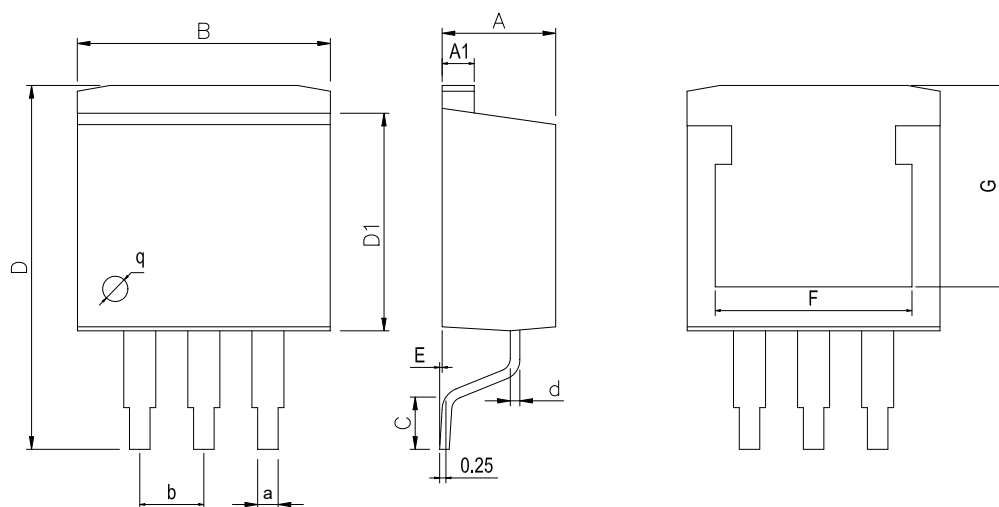

Dimensions In Millimeters(TO-263-3)

Symbol:	A	A1	B	C	D	D1	E	F	G	a	b
Min:	4.45	1.22	10	1.89	14.1	8.38	0	7.20	7.20	0.71	2.54BSC
Max:	4.62	1.32	10.4	2.19	15.3	8.89	0.305	8.10	8.10	0.97	

TO-220-3

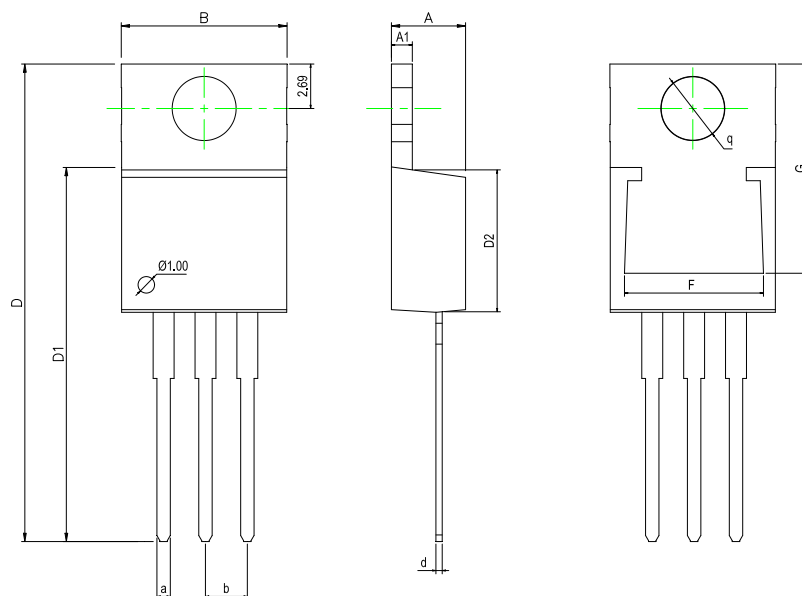


Dimensions In Millimeters(TO-220-3)

Symbol:	A	A1	B	D	D1	D2	F	G	a	d	b	q
Min:	4.45	1.22	10	28.2	22.22	8.50	8.30	12.55	0.71	0.33	2.54	3.80
Max:	4.62	1.32	10.4	28.9	22.62	9.10	8.55	12.75	0.97	0.42	BSC	TYP

Physical Dimensions


TO-252-2

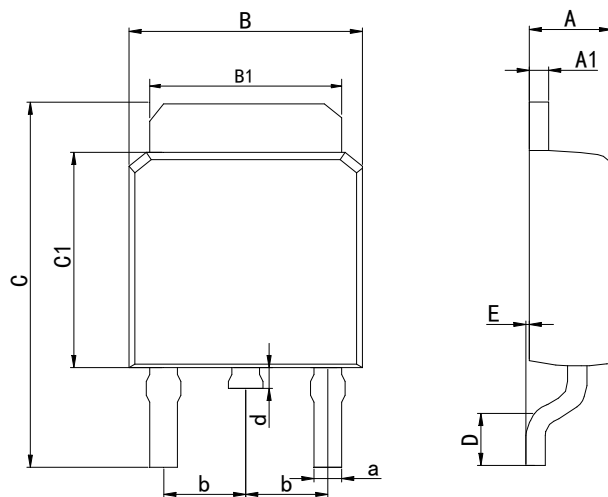

Dimensions In Millimeters(TO-252-2)

Symbol:	A	A1	B	B1	C	C1	D	E	a	d	b
Min:	2.10	0.45	6.40	5.10	9.20	5.30	0.90	0	0.50	0.60	2.28
Max:	2.50	0.70	6.80	5.50	10.6	6.30	1.75	0.23	0.80	1.20	BSC

TO-263-2

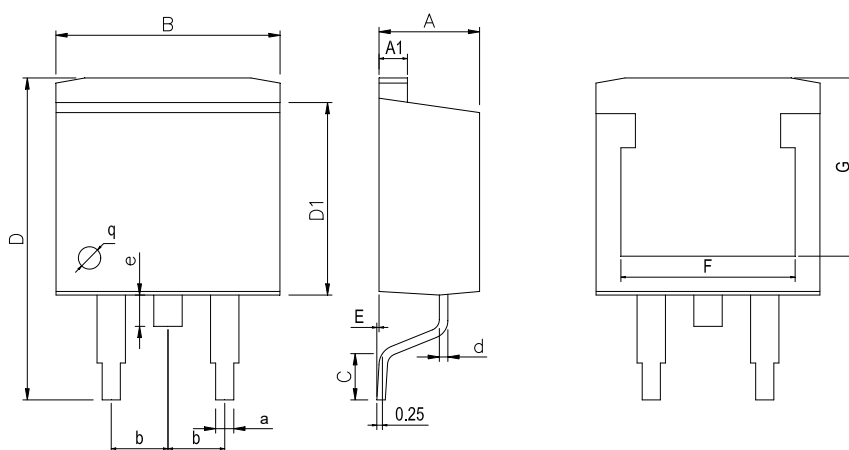


Dimensions In Millimeters(TO-263-2)

Symbol:	A	A1	B	C	D	D1	E	F	G	a	e	b
Min:	4.45	1.22	10	2.25	14.5	8.45	0	7.20	7.20	0.71	1.10	2.54BSC
Max:	4.62	1.32	10.4	2.85	15.4	9.10	0.305	8.10	8.10	0.97	1.70	

Physical Dimensions

SOT-223

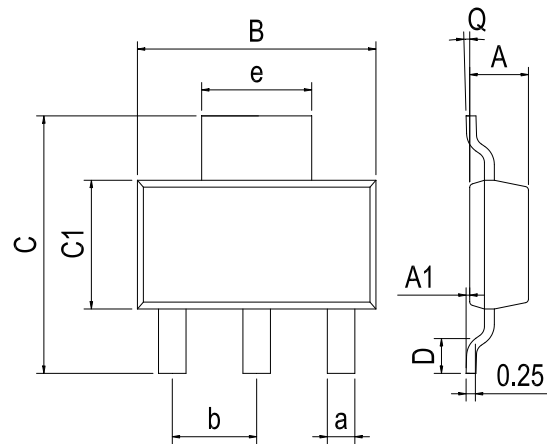

Dimensions In Millimeters(SOT-223)										
Symbol:	A	A1	B	C	C1	D	Q	a	b	e
Min:	1.50	0.05	6.30	6.70	3.30	0.65	0°	0.66	2.30 BSC	3.00 BSC
Max:	1.70	0.20	6.70	7.30	3.70	1.10	8°	0.84		

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2018-6	New	1-10
V1.1	2025-11	Document Reformatting	1-12
V1.2	2025-12	Add the LM350AH model and SOT223 package	1-13

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.