

1.Description

The 75xx series is a low-power high-voltage regulator manufactured by CMOS process. The maximum input voltage is 30V and the output voltage range is 1.5V~12.0V. It has the characteristics of high precision output voltage, very low power supply current and very low drop voltage.

3.Applications


- Battery power supply equipment
- Audio / video equipment

2.Features

- Low power consumption: $\leq 3\mu A$
- Low drop voltage: typical value 0.1V
- Low temperature bleaching: typical 50 ppm/°C
- High input voltage: up to 30V
- High precision output voltage: tolerance of +3%
- Package form: TO-92, SOT89-3, SOT-23-3

4.Pinning information

Pin	Symbol	Description
1	G	GND
2	V	VIN
3	V	VOUT
4,5	N	NC

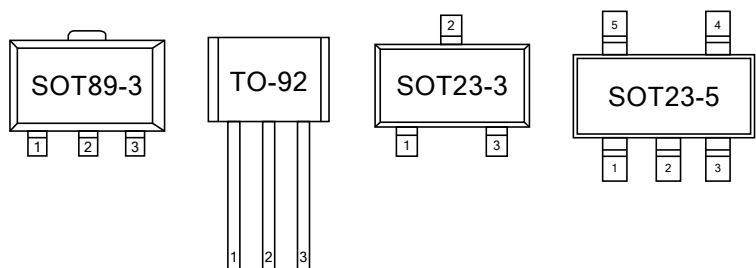




UMW HT75xx

5.Model selection

Name	Model	Maximum input voltage (V)	Output voltage (V)	Tolerance	Packaging Form
75xx-1	7530	30	3	±3%	TO 92 SOT-89 SOT23-3 SOT-23-5
	7533	30	3.3	±3%	
	7536	30	3.6	±3%	
	7540	30	4	±3%	
	7544	30	4.4	±3%	
	7550	30	5	±3%	



6.Principle block diagram

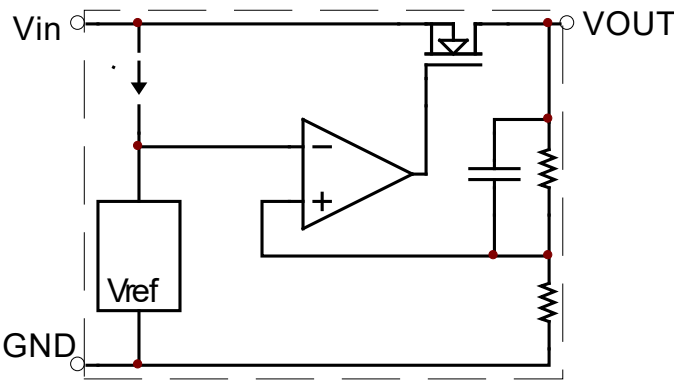

7.Limit parameter

Project	Symbol	parameter		Limit value	Company
Voltage	VIN	Maximum input voltage		30	V
power waste	PD	power waste	TO-92	700	mW
			SOT-23	300	
			SOT-89	400	
			SOT-23-5	300	
temperature	Tw	working temperature		-40 to 85	°C
	Tc	Storage temperature		-50 to 125	°C
	Th	welding temperature		260	°C,10s



8.1 Electrical properties (7530, T_{OPT}=25°C)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V _{OUT}	V _{IN} =5V, I _{OUT} =10mA	2.91	3	3.09	V
Output current	I _{OUT}	V _{IN} =5V	60	100		mA
Load regulation	ΔV _{OUT}	V _{IN} =5V, 1mA≤I _{OUT} ≤20mA		100	150	mV
Drop voltage	V _{DIF}	I _{OUT} =1mA		100		mV
Quiescent current	I _{SS}	V _{IN} = 5V, no load		2	3	μA
Line Regulation	ΔV _{OUT} /(ΔV _{IN} *V _{OUT})	4V≤V _{IN} ≤30V, I _{OUT} =1mA		0.2		%/V
input voltage	V _{IN}				30	V
temperature coefficient	ΔV _{OUT} /ΔT _A	V _{IN} =5V, I _{OUT} =10mA, 0°C≤T _A ≤70°C		±0.45		mV/°C

8.2 Electrical properties (7533, T_{OPT}=25°C)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V _{OUT}	V _{IN} =5.5V, I _{OUT} =10mA	3.201	3.3	3.399	V
Output current	I _{OUT}	V _{IN} =5.5V	60	100		mA
Load regulation	ΔV _{OUT}	V _{IN} =5.5V, 1mA≤I _{OUT} ≤30mA		100	150	mV
Drop voltage	V _{DIF}	I _{OUT} =1mA		100		mV
Quiescent current	I _{SS}	V _{IN} =5.5V, no load		2	3	μA
Line Regulation	ΔV _{OUT} /(ΔV _{IN} *V _{OUT})	4.5V≤V _{IN} ≤30V, I _{OUT} =1mA		0.2		%/V
input voltage	V _{IN}				30	V
temperature coefficient	ΔV _{OUT} /ΔT _A	V _{IN} =5.5V, I _{OUT} =10mA, 0°C≤T _A ≤70°C		±0.5		mV/°C



8.3 Electrical properties (7536, T_{OPT}=25°C)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V _{OUT}	V _{IN} =5.6V, I _{OUT} =10mA	3.492	3.6	3.708	V
Output current	I _{OUT}	V _{IN} =5.6V	60	100		mA
Load regulation	ΔV _{OUT}	V _{IN} =5.6V, 1mA≤I _{OUT} ≤20mA		100	150	mV
Drop voltage	V _{DIF}	I _{OUT} =1mA		100		mV
Quiescent current	I _{SS}	V _{IN} = 5.6V, no load		2	3	μA
Line Regulation	ΔV _{OUT} /(ΔV _{IN} *V _{OUT})	4.6V≤V _{IN} ≤30V, I _{OUT} =1mA		0.2		%/V
input voltage	V _{IN}				30	V
temperature coefficient	ΔV _{OUT} /ΔT _A	V _{IN} =5.6V, I _{OUT} =10mA, 0°C≤T _A ≤70°C		±0.6		mV/°C

8.4 Electrical properties (7540, T_{OPT}=25°C)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V _{OUT}	V _{IN} =6V, I _{OUT} =10mA	3.88	4	4.12	V
Output current	I _{OUT}	V _{IN} =6V	60	100		mA
Load regulation	ΔV _{OUT}	V _{IN} =6V, 1mA≤I _{OUT} ≤30mA		100	150	mV
Drop voltage	V _{DIF}	I _{OUT} =1mA		100		mV
Quiescent current	I _{SS}	V _{IN} =6V, no load		2	3	μA
Line Regulation	ΔV _{OUT} /(ΔV _{IN} *V _{OUT})	5V≤V _{IN} ≤30V, I _{OUT} =1mA		0.2		%/V
input voltage	V _{IN}				30	V
temperature coefficient	ΔV _{OUT} /ΔT _A	V _{IN} =6V, I _{OUT} =10mA, 0°C≤T _A ≤70°C		±0.7		mV/°C



8.5 Electrical properties (7544, $T_{OPT}=25^{\circ}\text{C}$)


Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V_{OUT}	$V_{IN}=6.4\text{V}$, $I_{OUT}=10\text{mA}$	4.268	4.4	4.532	V
Output current	I_{OUT}	$V_{IN}=6.4\text{V}$	60	100		mA
Load regulation	ΔV_{OUT}	$V_{IN}=6.4\text{V}$, $1\text{mA} \leq I_{OUT} \leq 20\text{mA}$		100	150	mV
Drop voltage	V_{DIF}	$I_{OUT}=1\text{mA}$		100		mV
Quiescent current	I_{SS}	$V_{IN}=6.4\text{V}$, no load		2	3	μA
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$5.4\text{V} \leq V_{IN} \leq 30\text{V}$, $I_{OUT}=1\text{mA}$		0.2		%/V
input voltage	V_{IN}				30	V
temperature coefficient	$\Delta V_{OUT}/\Delta T_A$	$V_{IN}=6.4\text{V}$, $I_{OUT}=10\text{mA}$, $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$		± 0.7		$\text{mV}/^{\circ}\text{C}$

8.6 Electrical properties (7550, $T_{OPT}=25^{\circ}\text{C}$)


Parameter	Symbol	Conditions	Min	Typ	Max	Units
Output voltage	V_{OUT}	$V_{IN}=7\text{V}$, $I_{OUT}=10\text{mA}$	4.85	5	5.15	V
Output current	I_{OUT}	$V_{IN}=7\text{V}$	60	100		mA
Load regulation	ΔV_{OUT}	$V_{IN}=7\text{V}$, $1\text{mA} \leq I_{OUT} \leq 30\text{mA}$		100		mV
Drop voltage	V_{DIF}	$I_{OUT}=1\text{mA}$		100		mV
Quiescent current	I_{SS}	$V_{IN}=7\text{V}$, no load		2	3	μA
Line Regulation	$\Delta V_{OUT}/(\Delta V_{IN} \cdot V_{OUT})$	$6\text{V} \leq V_{IN} \leq 30\text{V}$, $I_{OUT}=1\text{mA}$		0.2		%/V
input voltage	V_{IN}				30	V
temperature coefficient	$\Delta V_{OUT}/\Delta T_A$	$V_{IN}=7\text{V}$, $I_{OUT}=10\text{mA}$, $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$		± 0.75		$\text{mV}/^{\circ}\text{C}$




9. Application circuit

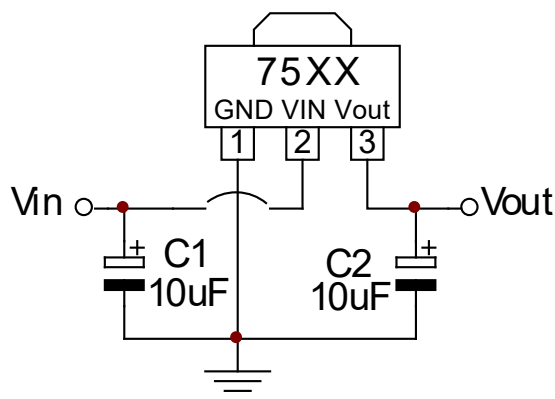


1. Basic circuit

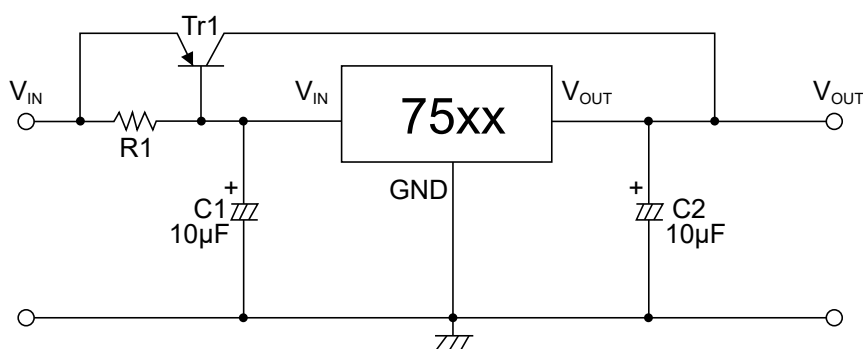


2. High output current regulator

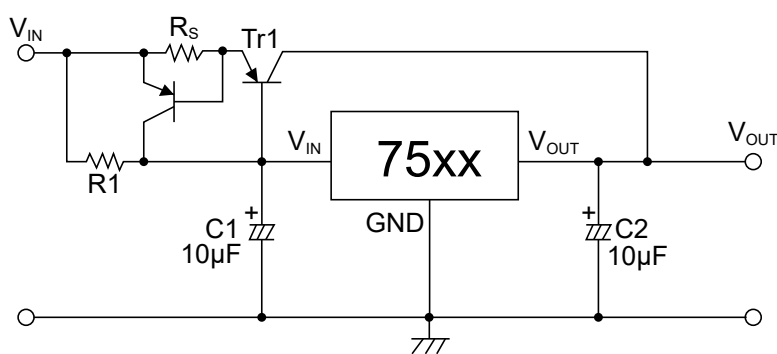


3. Short circuit protection circuit

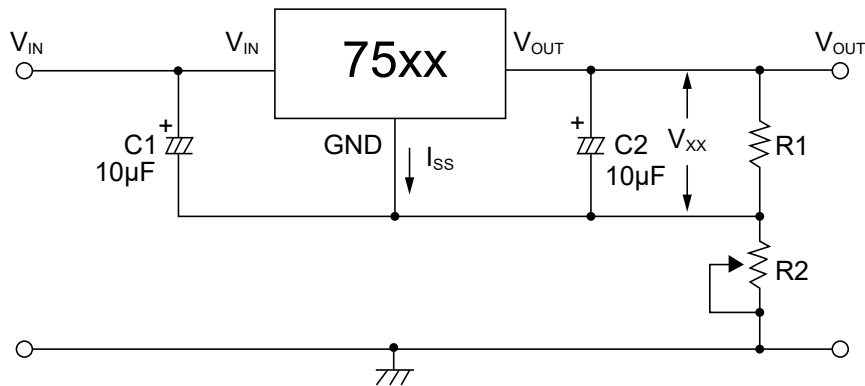


4. Circuit for increasing output voltage (1)

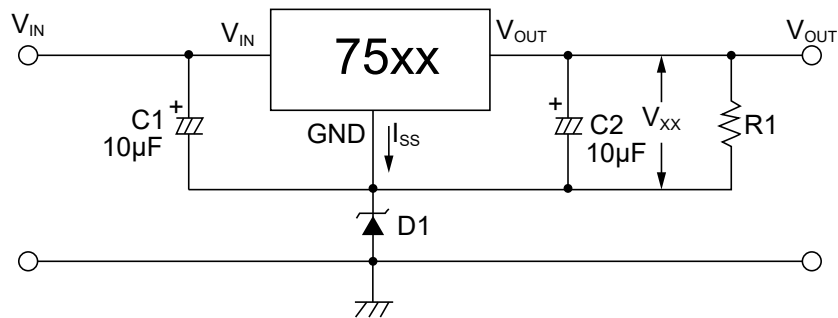

5. Circuit for increasing output voltage (2)

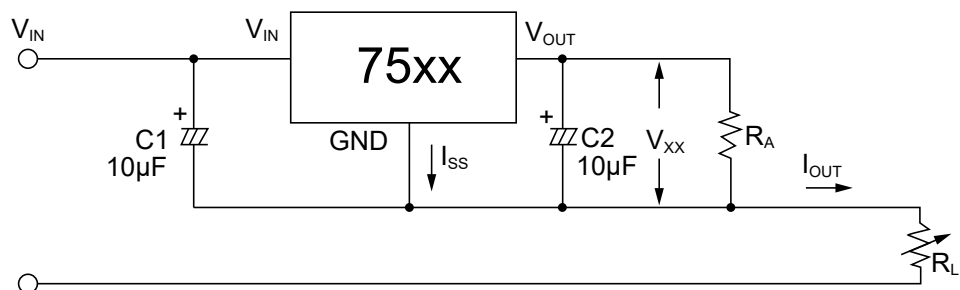

6. Current regulating circuit

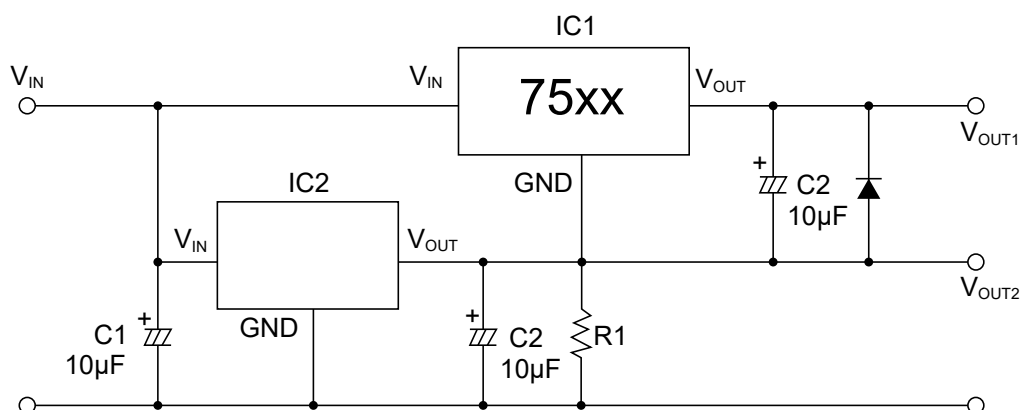


7. Dual output circuit

Notes: "xx" Represents the output voltage.



10.1 TO-92 Package Outline Dimensions

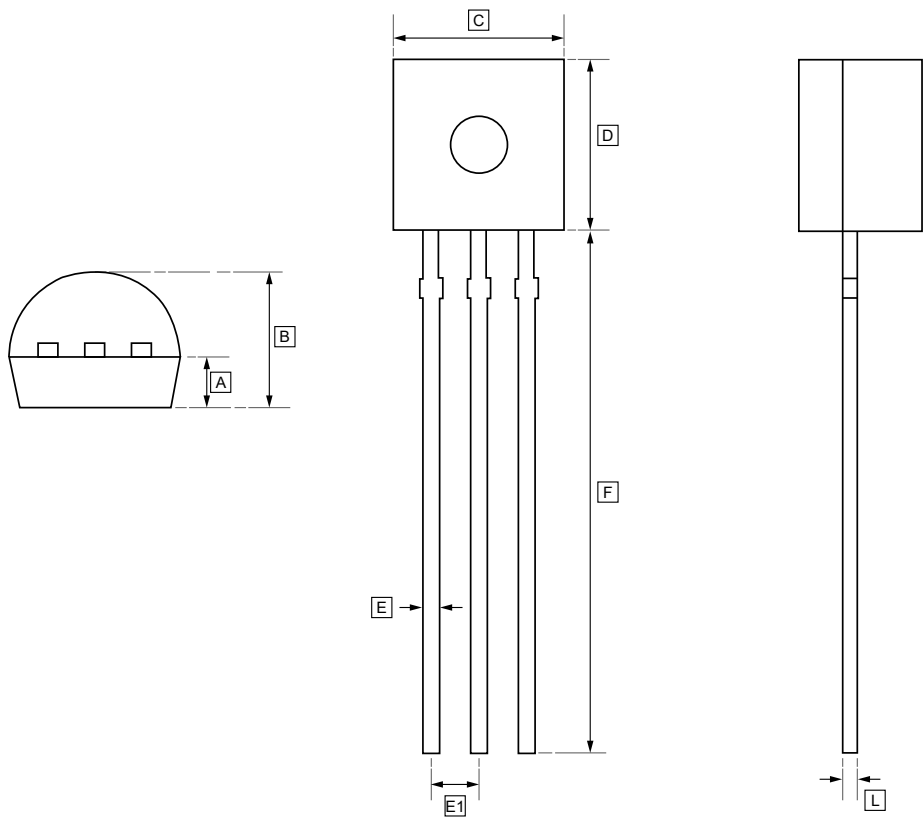


DIMENSIONS (mm are the original dimensions)

Symbol	A	B	C	D	E	E1	F	L
Min	1.10	3.50	4.50	4.40	0.35	1.27	13.50	0.35
Max	1.30	3.90	4.90	4.90	0.45	TYP	14.50	0.40



10.2 SOT-89-3 Package Outline Dimensions




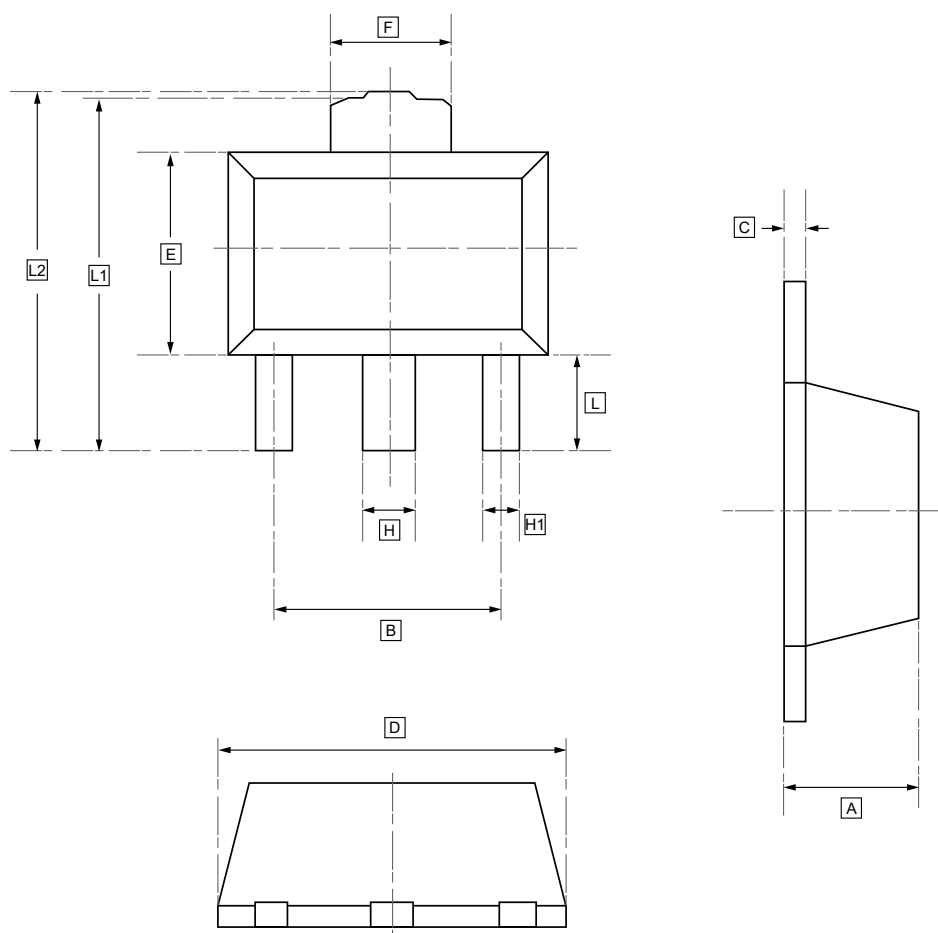


DIMENSIONS (mm are the original dimensions)

Symbol	A	B	C	D	E	F	H	H1	L	L1	L2
Min	1.450	2.950	0.330	4.450	2.450	1.650	0.450	0.370	0.900	4.100	4.100
Max	1.550	3.050	0.430	4.550	2.550	1.750	0.580	0.480	1.000	4.300	4.350



10.3 SOT-23 Package Outline Dimensions

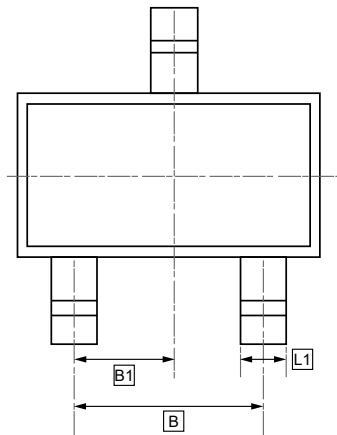


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	L1	L2	C	D	E	E1	B	B1	θ
Min	0.900	0.020	0.300	0.300	0.100	2.800	1.200	2.300	1.800	0.950	0°
Max	1.100	0.100	0.500	0.500	0.120	3.000	1.400	2.500	2.000	TYP	8°



10.4 SOT-23-5 Package Outline Dimensions




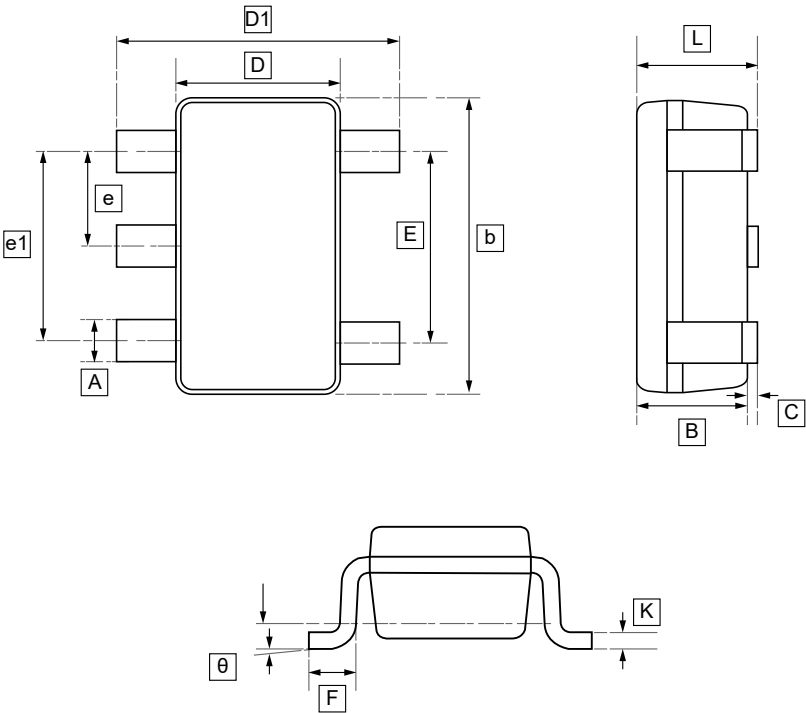


DIMENSIONS (mm are the original dimensions)

Symbol	A	B	b	C	D	D1	E	e	e1	F	L	K	θ
Min	0.3	1.1	2.75	0.00	1.45	2.6	1.9	0.95	1.9	0.3	1.45	0.08	0°
Max	0.5		3.05	0.15	1.75	3.0				0.6		0.22	8°



11.Ordering information



yy: Year Code
ww: Week Code

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW HT75xx-1	75xx-1	SOT-89	1000	Tape and reel
UMW HT75xxS	HTxx	SOT-23	3000	Tape and reel
UMW HT75xxA-1	75xxA-1	TO-92	1000	Tape and reel
UMW HT75xxS-1	U xx2	SOT23-5	3000	Tape and reel



12.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.