


1.Description

UMW NC7SB3157P6X is an analog switch based on CMOS technology. It has low power consumption, low transmission delay and low output impedance. The voltage output range of analog signal and digital signal can be from V_{CC} or GND. The select input terminal has over-voltage protection, which allows the input voltage to be higher than V_{CC} , up to 7V, and the pin will not be burned.

2.Features

- low power consumption
- High transmission speed
- Flip standard CMOS logic level
- High bandwidth, high linearity
- Switch for NTSC / PAL video, audio, SPDIF and HDTV
- Package form SC70-6
- It can be used for clock switch and data selection switch
- Low output impedance
- First break and then open protection to prevent short circuit
- Working temperature - 55°C ~ + 125°C

3.Pinning Information

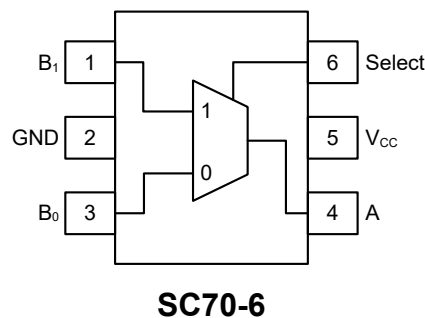

Pin description

Pin	I/O	Function
A, B ₀ , B ₁	I/O	Data Port
Select	I	Control Selection
V_{CC}	-	Power Supply Terminal
GND	-	Land



Function Description

Select Input	Function
L	B ₀ to A
H	B ₁ to A

4.Thermal Resistance Data

Parameter	Symbol	Numerical Value	Company
Thermal Resistance	θ_{JA}	270	°C/W

5.Limit Parameter

Parameter	Symbol	Range	Units
Supply voltage	V_{CC}	-0.5~+7.0	V
Switching voltage (Note 1)	V_S	-0.5~ $V_{CC}+0.5$	V
Input voltage (Note 1)	V_{IN}	-0.5~+7.0	V
Vin @ 0V input current clamp diode	I_{IK}	-50	mA
Output current	I_{OUT}	128	mA
Power to ground current	I_{CC}/I_{GND}	100	mA
Storage temperature range	T_{STG}	-65~+150	°C
Maximum junction temperature	T_J	150	°C
Wire temperature (welding, 10 seconds)	T_L	260	°C
Total power consumption (85°C)	P_D	180	mW

Exceeding the maximum value of DC limit parameters may cause irreparable damage to the circuit.If there is no special case, ensure that the power supply voltage, operating temperature and load characteristics of input / output of the whole working system are within the above range.

Note 1: the negative voltage of I/O can be exceeded according to the clamping diode current range of input / output.



6.Working Environment (Note 2)

Parameter		Symbol	Mid	Max	Units
Supply voltage		V_{CC}	1.65	5.5	V
Select terminal input voltage		V_{IN}	0	V_{CC}	V
Switch input voltage		V_{IN}	0	V_{CC}	V
Output voltage		V_{OUT}	0	V_{CC}	V
Working temperature		T_A	-55	+125	°C
Enter the rising and falling time	Input voltage $V_{CC}=2.3V - 3.6V$	t_r, t_f	0	10	ns/V
	Input voltage $V_{CC}=4.5V - 5.5V$		0	5	ns/V

Note: The input voltage of 2:Select terminal must be set to a high level or a low level, and cannot be left floating.



7.1 Electrical Characteristics (DC Characteristic)

Parameter	Symbol	Condition	V_{CC}	$T_A=25^{\circ}\text{C}$			$T_A=-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$		Units
				Min	Typ	Max	Min	Max	
High level input	V_{IH}		1.65-1.95	$0.75V_{CC}$			$0.75V_{CC}$		V
			2.3-2.8	1.5			1.5		V
			3-4.2	2.4			2.4		V
			4.5-5.5	$0.7V_{CC}$			$0.6V_{CC}$		V
Input low level	V_{IL}		1.65-1.95			$0.25V_{CC}$		$0.25V_{CC}$	V
			2.3-2.8			0.4		0.4	V
			3-5.5			$0.3V_{CC}$		$0.3V_{CC}$	V
Leakage current input	I_{IN}	$0 < V_{IN} < 5.5\text{V}$	0-5.5		± 0.05	± 0.1		± 1	μA
Closed state leakage electric current	I_{OFF}	$0 < A, B < V_{CC}$	1.65-5.5		± 0.05	± 0.1		± 1	μA
Quiescent current	I_{CC}	$V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$	5.5			1		10	μA
Analog level input Into the scope			V_{CC}	0		V_{CC}	0	V_{CC}	V
Switch on resistance (Note 3)	R_{ON}	$V_{IN}=0\text{V}$, $I_O=30\text{mA}$	4.5		3			7	Ω
		$V_{IN}=2.4\text{V}$, $I_O=-30\text{mA}$			5			12	Ω
		$V_{IN}=4.5\text{V}$, $I_O=-30\text{mA}$			7			15	Ω
		$V_{IN}=0\text{V}$, $I_O=24\text{mA}$	3		4			9	Ω
		$V_{IN}=3\text{V}$, $I_O=-24\text{mA}$			10			20	Ω
		$V_{IN}=0\text{V}$, $I_O=8\text{mA}$	2.3		5			12	Ω
		$V_{IN}=2.3\text{V}$, $I_O=-8\text{mA}$			13			30	Ω
		$V_{IN}=0\text{V}$, $I_O=4\text{mA}$	1.65		6.5			20	Ω
		$V_{IN}=1.65\text{V}$, $I_O=-4\text{mA}$			17			50	Ω



Parameter	Symbol	Condition	V_{CC}	$T_A=25^{\circ}\text{C}$			$T_A=-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$		Units
				Min	Typ	Max	Min	Max	
Full signal range on resistance (Note 3) (Note 7)	R_{RANGE}	$I_A=-30\text{mA}, 0\leq V_{Bn}\leq V_{CC}$	4.5					25	Ω
		$I_A=-24\text{mA}, 0\leq V_{Bn}\leq V_{CC}$	3					50	Ω
		$I_A=-8\text{mA}, 0\leq V_{Bn}\leq V_{CC}$	2.3					100	Ω
		$I_A=-4\text{mA}, 0\leq V_{Bn}\leq V_{CC}$	1.65					300	Ω
On resistance matching between channels (Note 3) (Note 4) (Note 5)	ΔR_{ON}	$I_A=-30\text{mA}, V_{Bn}=3.15$	4.5		0.15				Ω
		$I_A=-24\text{mA}, V_{Bn}=2.1$	3		0.2				Ω
		$I_A=-8\text{mA}, V_{Bn}=1.6$	2.3		0.5				Ω
		$I_A=-4\text{mA}, V_{Bn}=1.15$	1.65		0.5				Ω
On-resistance flatness (Note 3) (Note 4) (Note 6)	R_{FLAT}	$I_A=-30\text{mA}, 0\leq V_{Bn}\leq V_{CC}$	5		6				Ω
		$I_A=-24\text{mA}, 0\leq V_{Bn}\leq V_{CC}$	3.3		12				Ω
		$I_A=-8\text{mA}, 0\leq V_{Bn}\leq V_{CC}$	2.5		28				Ω
		$I_A=-4\text{mA}, 0\leq V_{Bn}\leq V_{CC}$	1.8		125				Ω



7.2 Electrical Characteristics (AC Characteristics)

Parameter	Symbol	Condition	V_{CC}	$T_A=25^{\circ}\text{C}$			$T_A=-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$		Units
				Min	Typ	Max	Min	Max	
Transmission Delay (Note 8)	t_{PHL} t_{PLH}	Fig. 1, $V_I=\text{OPEN}$	1.65-1.95			3.5		3.5	nS
			2.3-2.7			1.2		1.2	nS
			3.0-3.5			0.8		0.8	nS
			4.5-5.5			0.3		0.3	nS
Open time (a to Bn)	t_{PZL} t_{PZH}	Fig. 1 $V_I=2*V_{CC}$ for t_{PZL} , $V_I=0V$ for t_{PZH}	1.65-1.95			23	7	24	nS
			2.3-2.7			13	3.5	14	nS
			3.0-3.5			6.9	2.5	7.6	nS
			4.5-5.5			5.2	1.7	5.7	nS
turn - off time (port a to port b)	t_{PLZ} t_{PHZ}	Fig. 1 $V_I=2*V_{CC}$ for t_{PLZ} , $V_I=0V$ for t_{PHZ}	1.65-1.95			12.5	3	13	nS
			2.3-2.7			7	2	7.5	nS
			3.0-3.5			5	1.5	5.3	nS
			4.5-5.5			3.5	0.8	3.8	nS
Break before connect time (Note 7)	t_{B-M}	Fig. 2, $C_L=50\text{pF}$, $R_L=600\Omega$	1.65-1.95				0.5		nS
			2.3-2.7				0.5		nS
			3.0-3.5				0.5		nS
			4.5-5.5				0.5		nS
Charge injection (Note 7)	Q	Fig. 3, $C_L=0.1\text{nF}$, $V_{GEN}=0V$, $R_{GEN}=0\Omega$	5		7				pC
			3.3		3				pC
Close(note 9) Release	OIRR	Fig.4, $R_L=50\Omega$, $f=10\text{MHz}$	1.65-5.5		-57				dB
Cross talk	Xtalk	Fig.5, $R_L=50\Omega$, $f=10\text{MHz}$	1.65-5.5		-54				dB
-3dB bandwidth	BW	Fig. 8, $R_L=50\Omega$	1.65-5.5		350M				Hz
total harmonic distortion (Note 7)	THD	$R_L=600\Omega$, $0.5V_{P-P}$, $f=600\text{Hz} - 20\text{kHz}$	5		0.011				%
Input terminal capacitance (Note 10)	C_{IN}		0		2.3				pF



Parameter	Symbol	Condition	V_{CC}	$T_A=25^{\circ}\text{C}$			$T_A=-40^{\circ}\text{C}\sim 85^{\circ}\text{C}$		Units
				Min	Typ	Max	Min	Max	
B disconnection capacitance when the port is turned off (Note 10)	C_{IO-B}	Figure 6	5		5				pF
A conduction capacitance when the port is open (Note 10)	C_{IOA-ON}	Figure 7	5		15.5				pF

Note3: It is obtained by measuring the ratio of the voltage difference between the two ports A and B to the current flowing through the two ports. On-resistance is determined by the lower voltage port of port A and B

Note4: The load characteristics introduced by encapsulation are not included.

Note5: $\Delta RON = RON_{max} - RON_{min}$ in the given V_{CC} , temperature and level range.

Note6: On-resistance flatness refers to the difference between the maximum value and the minimum value of on-resistance under specified conditions.

Note 7: Design simulation value.

Note 8: This parameter is the design simulation value rather than the measured value. In the case of an ideal voltage source (zero output load), the transmission delay will be better than that of a 50pF load capacitor.

Note 9: Turn off isolation $= 20\log_{10}[V_A/V_{Bn}]$.

Note 10: $T_A=+25^{\circ}\text{C}$, $f=1\text{MHz}$, excluding the load capacitance introduced by packaging.

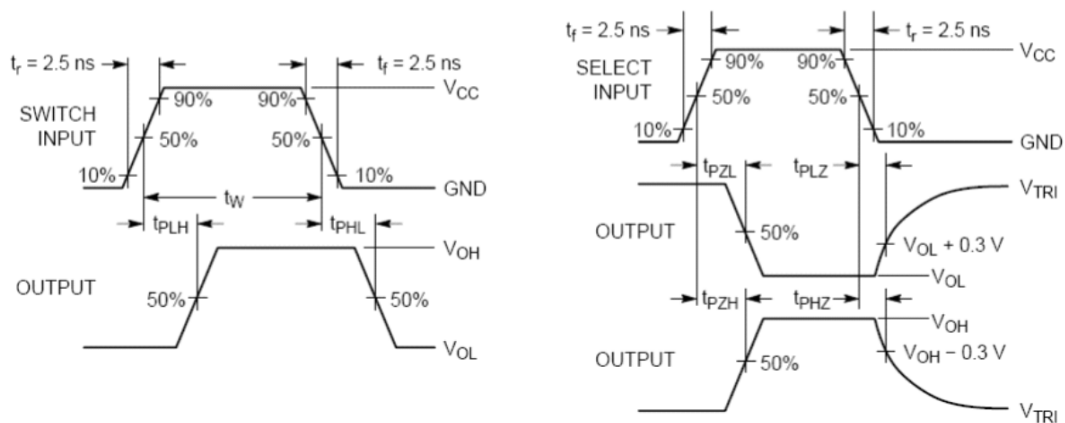
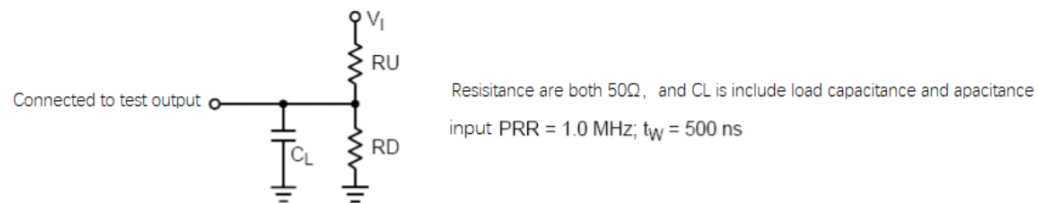


Figure 1 Transmission delay, opening time, closing time



Figure 2: Break first and

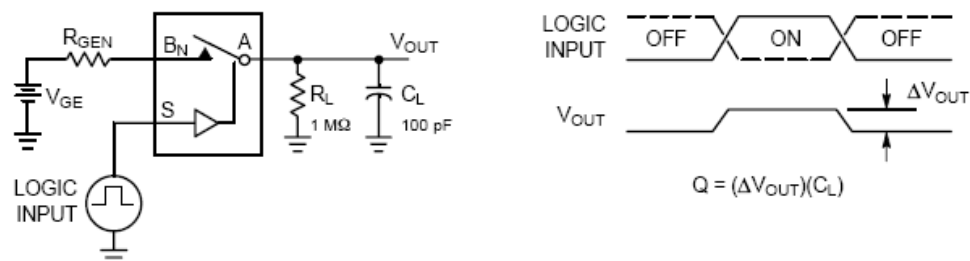


Figure 3 Charge

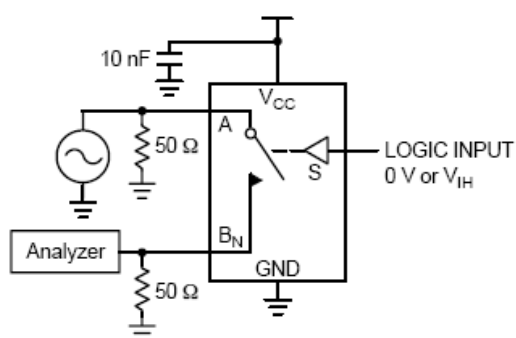


Figure 4 Turning off

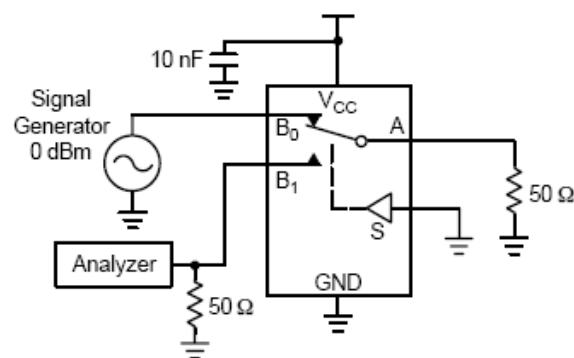


Figure 5 Crosstalk

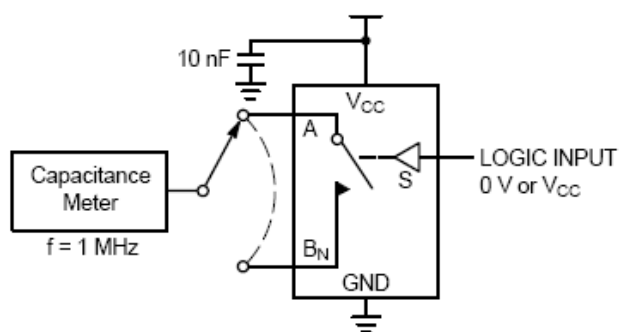


Figure 6 Output

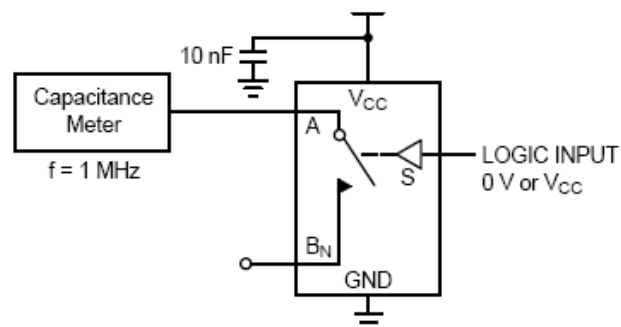


Figure 7 Output


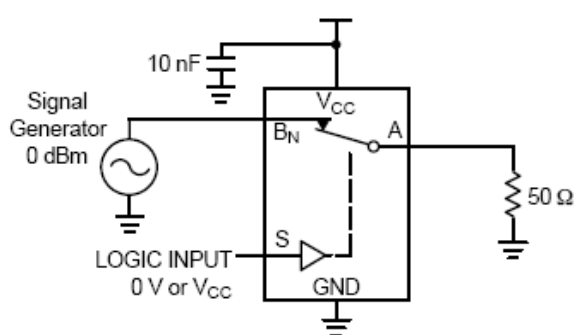


Figure 8 Bandwidth




8. Typical Characteristic



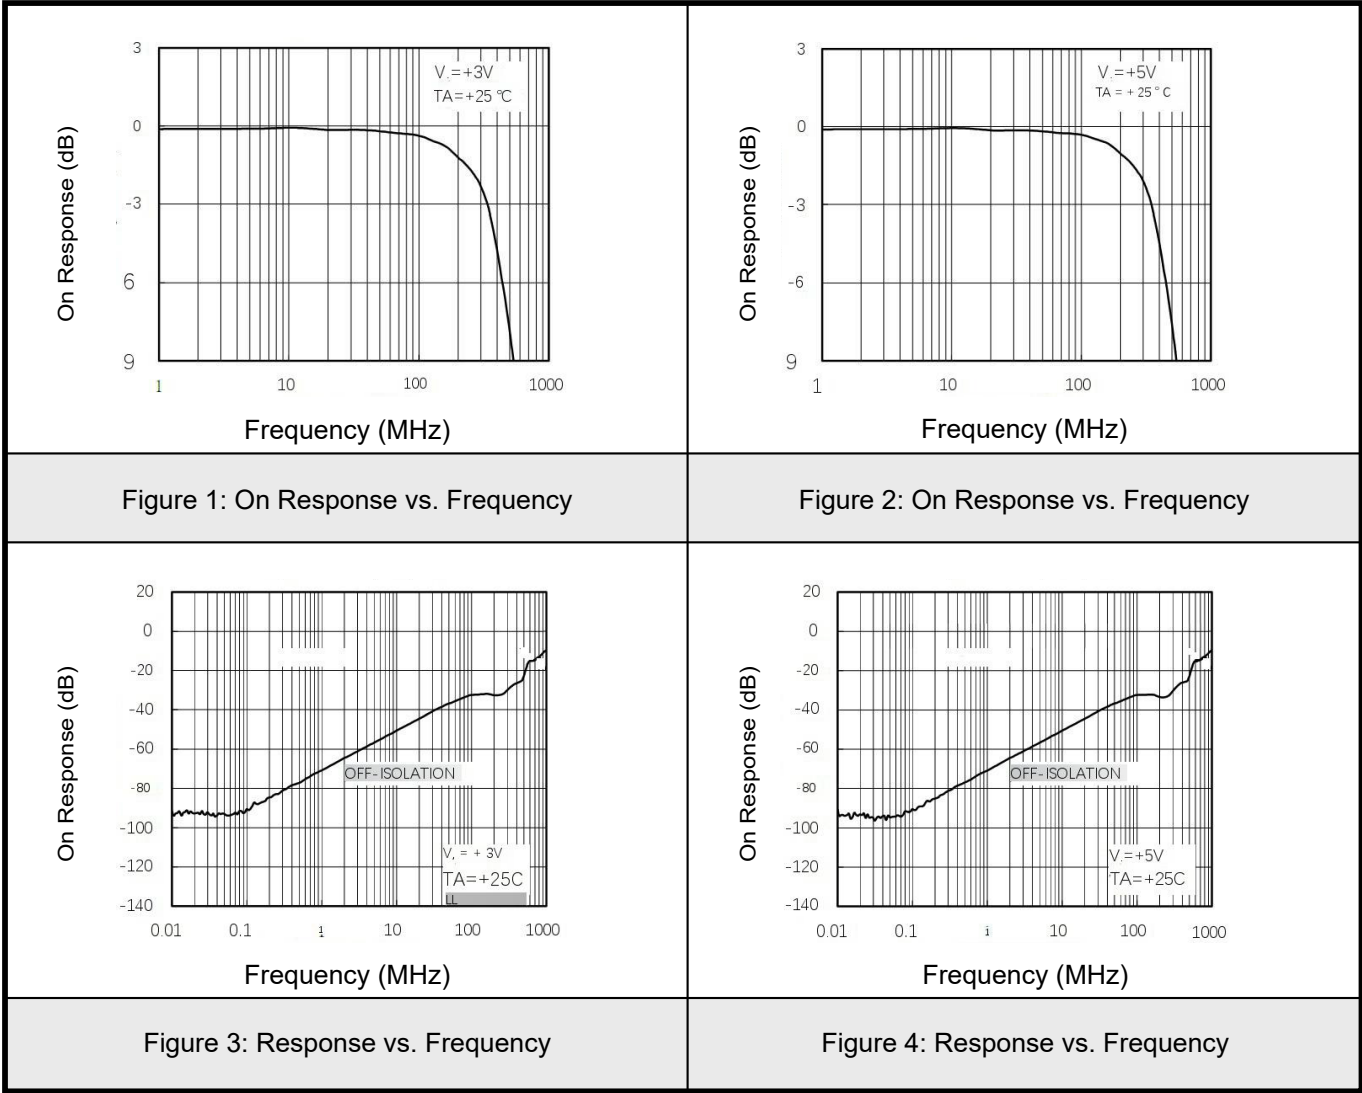

9.SC70-6 Package Outline Dimensions

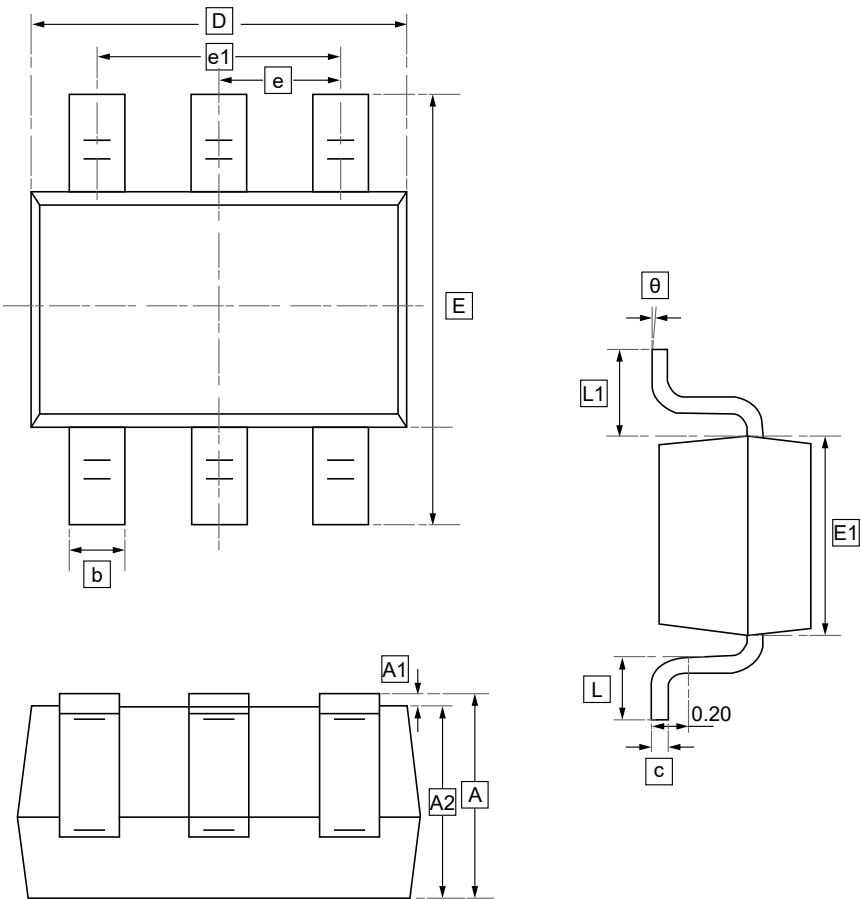


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	e1	L	L1
Min	0.90	0.00	0.90	0.15	0.08	2.05	2.15	1.15	0.65	1.2	0.26	0.525
Max	1.10	0.10	1.00	0.35	0.15	2.25	2.45	1.35	TYP.	1.4	0.46	REF.

Symbol	θ
Min	0°
Max	8°



15.Ordering Information



yww: Batch Code

Order Code	Package	Base QTY	Delivery Mode
UMW NC7SB3157P6X	SC70-6	3000	Tape and reel



16.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.