


1.Description

MC33063ADR is a single-chip DC-DC converter integrated circuit with a reference voltage source for temperature compensation (1.25V), comparator, oscillator, driver and high current output switch tube which can effectively limit the current and control the working cycle. With a few external components, the DC-DC converter with boost, buck and voltage reversal can be formed. The circuit is packaged in SOP8.

2.Features


- The working voltage range is 3.0V-32V
- The static current is small
- Pin layout
- It has output current limit function and output current protection function
- The limit current of the output switch is 1.2A
- Adjustable output voltage
- The working frequency can reach 100kHz
- Internal reference voltage accuracy 2%

3.Functional Block Diagram

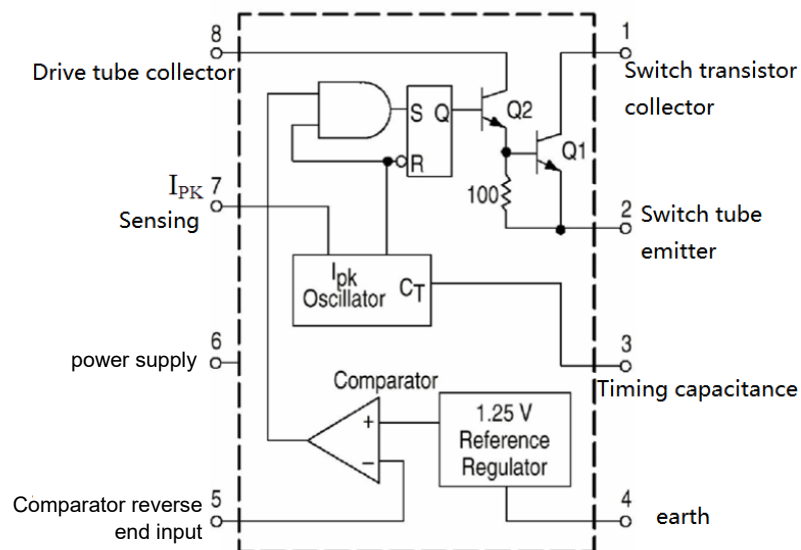



4.Pinning Information

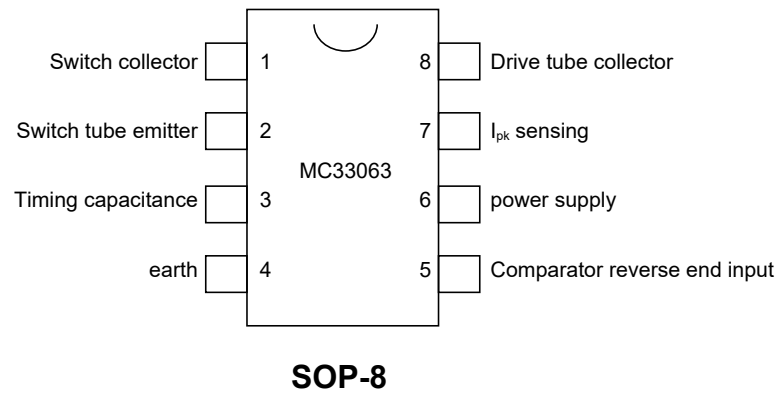

Pin Descriptions

Balloon	Function	Symbol	Balloon	Function	Symbol
1	Switch collector	SC	5	Comparator reverse end input	FB
2	Switch tube emitter	SE	6	power supply	V _{CC}
3	Timing capacitor	CT	7	I _{PK} sensing	I _{pk}
4	earth	GND	8	Driving tube collector	DC



5.Limit Value

Explain	Symbol	Min	Max	Company
Supply voltage	V_{CC}		32	V
Comparator input voltage range	V_{IR}	-0.3	30	V
Output collector voltage	$V_{C(switch)}$		32	V
Output tube emitter voltage ($V_{PIN1}=32V$)	$V_{E(switch)}$		32	V
Voltage between collector and emitter of output tube	$V_{CE(switch)}$		32	V
Driving tube collector voltage	$V_{C(driver)}$		32	V
Driving tube collector current	$I_{C(driver)}$		100	mA
Output current	I_{SW}		1.2	A
Power waste	P_D		1.25	W
Working environment temperature	T_A	40	85	°C
Storage temperature	T_{STG}	-65	150	°C




6. Electrical Characteristics ($V_{CC}=5.0V$, $T_A=0^{\circ}C\sim70^{\circ}C$)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Oscillator part						
Oscillation frequency	f_{osc}	$V_{PIN5}=0V$, $C_T=1nF$, $T_A=25^{\circ}C$	24	33	42	KHz
Charging current	I_{chg}	$V_{CC}=5V\sim32V$, $T_A=25^{\circ}C$	24	33	42	μA
Discharge current	I_{dischg}	$V_{CC}=5V\sim32V$, $T_A=25^{\circ}C$	140	200	260	μA
Ratio of discharge to charging current	I_{dischg}/I_{chg}	$V_{PIN7}=V_{CC}$, $T_A=25^{\circ}C$	5.2	6.2	7.5	
Current limiter	V_{IPK}	$I_{chta}=25^{\circ}C$	250	300	350	mV
Output part						
Saturation pressure drop	$V_{CE(sat)}$	$I_{SW}=1A$, pin1, 8 connection		1	1.3	V
Saturation pressure drop	$V_{CE(sat)}$	$I_{SW}=1A$, $R_{PIN8}=82$ to V_{CC}		0.45	0.7	V
DC amplification factor	h_{FE}	$I_{SW}=1A$, $V_{CE}=5V$, $T_A=25^{\circ}C$	50	120		
Collector leakage current	$I_{C(off)}$	$V_{CE}=30V$		0.01	100	μA
Comparator part						
Threshold voltage	V_{th}	$T_A=25^{\circ}C$, $T_A=0\sim70^{\circ}C$	1.23	1.25	1.27	V
			1.21		1.29	V
Input bias current	I_{IB}	$V_{IN}=0V$		-40	-400	nA
Threshold voltage linear adjustment rate	Regline	$V_{CC}=3V\sim30V$		1.4	5	mV
Overall part						
Power supply current	I_{CC}	$V_{CC}=5V\sim30V$, $C_T=1nF$, $V_{PIN7}=V_{CC}$, $V_{PIN5}>V_{th}$, $V_{PIN2}=GND$ others are suspended		2.5	4	mA



7.Application Circuit Diagram

MC33063 as reverse DC-DC converter

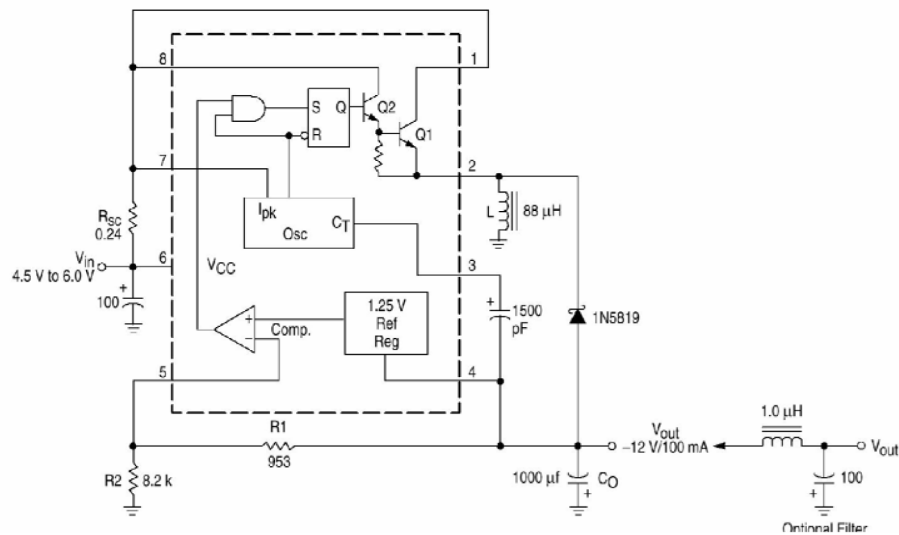


As shown in Fig. 3, the voltage ripple and noise can be further reduced after the LC filter is added. The characteristics are shown in the table below

Parameter	Test Conditions	Result
Linear adjustment rate	$V_{IN}=4.5\sim6.0V$, $I_O=100mA$	$3.0mV=0.012\%$
Load adjustment rate	$V_{IN}=5V$, $I_O=10\sim100mA$	$0.022V=+0.09\%$
Output ripple	$V_{IN}=5V$, $I_O=100mA$	$500mV_{pp}$
Circuit limiting current	$V_{IN}=5V$, $R_L=0.1$	$910mA$
Efficiency	$V_{IN}=5V$, $I_O=100mA$	64.5%
Output ripple	$V_{IN}=5V$, $I_O=100mA$	$70mV_{pp}$




8. Typical Characteristic

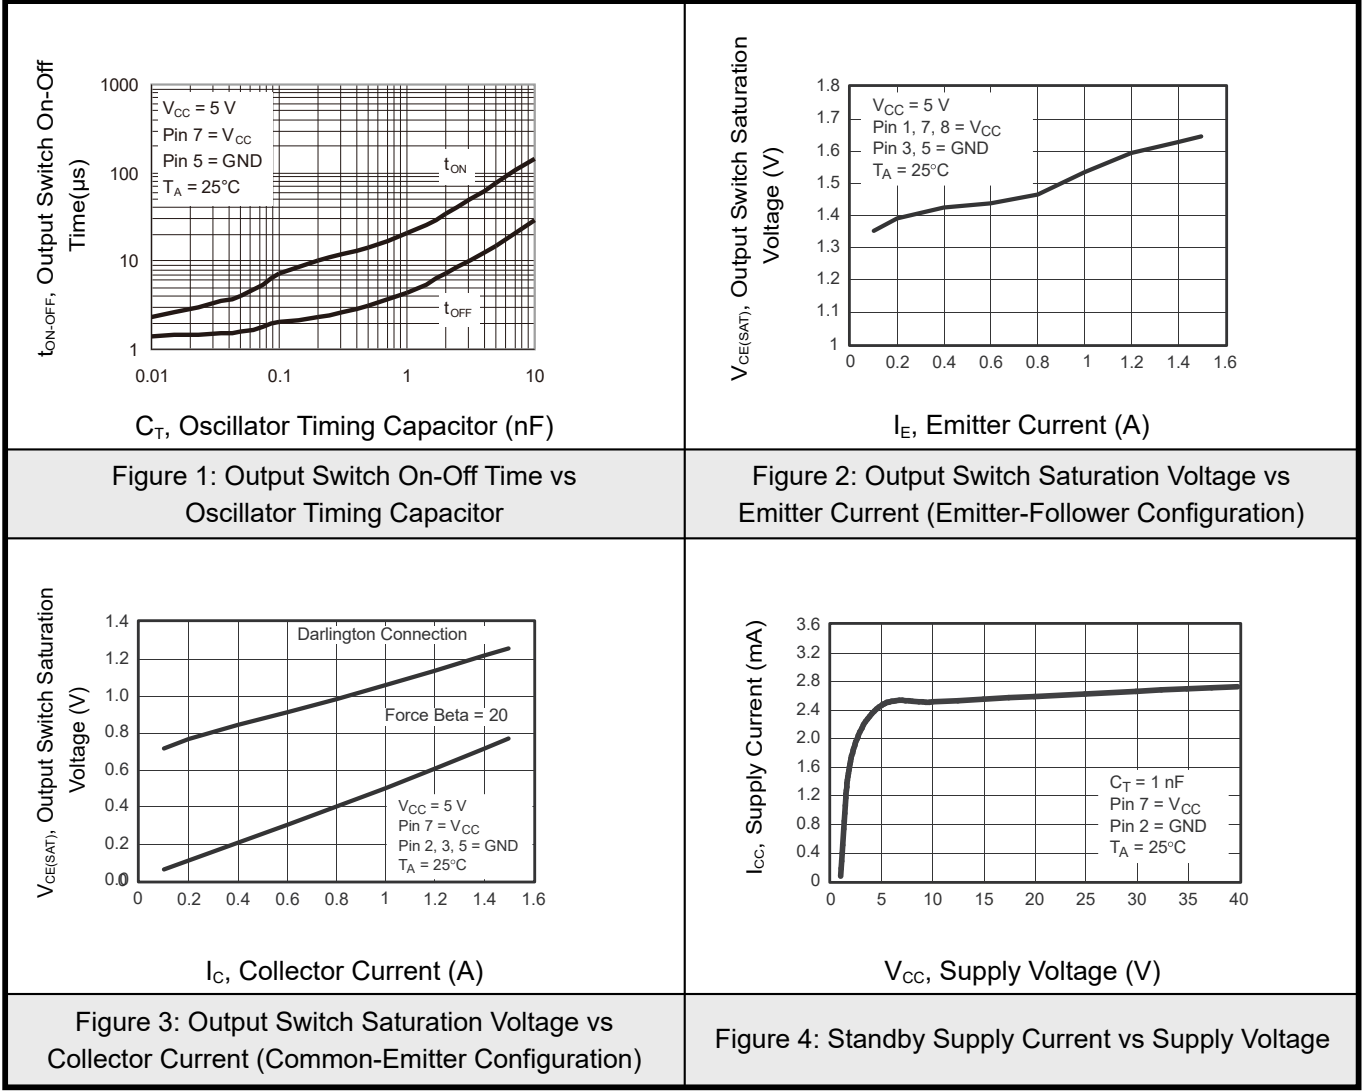



9.SOP-8 Package Outline Dimensions

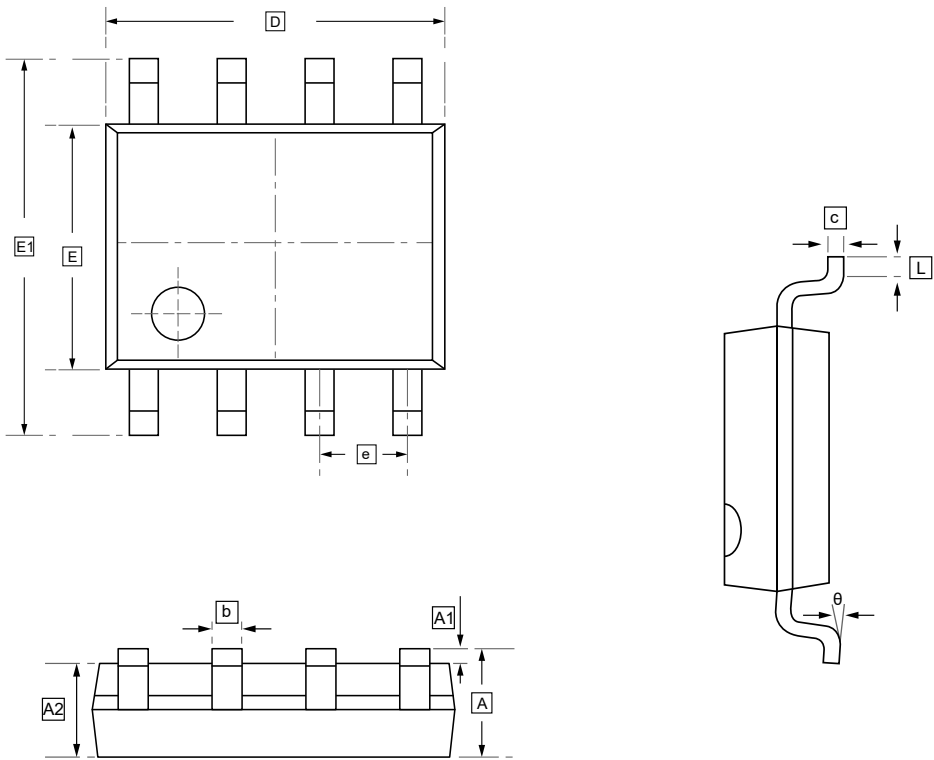


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0.000	1.350	0.330	0.170	4.700	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	5.100	4.000	6.200	BSC	1.270	8°



10.Ordering Information



yy: Year Code
ww: Week Code

Order Code	Package	Base QTY	Delivery Mode
UMW MC33063ADR	SOP-8	2500	Tape and reel



11.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.