

1.Description

This Power MOSFET is designed to withstand high energy in the avalanche and commutation modes. Designed for low-voltage, high speed switching applications in power supplies, converters, and power motor controls, these devices are particularly well suited for bridge circuits where diode speed and commutating safe operating areas are critical and offer an additional safety margin against unexpected voltage transients.


2.Features

- $V_{DS(V)} = -60V$
- $I_D = -12A (V_{GS} = -10V)$
- $R_{DS(ON)} = 150m\Omega (V_{GS} = -10V)$
- Avalanche Energy Specified
- I_{DSS} and $V_{DS(ON)}$ Specified at Elevated Temperature
- Designed for Low-Voltage, High-Speed Switching Applications and to Withstand High Energy in the Avalanche and Commutation Modes

3.Pinning information

Pin	Symbol	Description
1	G	GATE
3	S	SOURCE
2	D	DRAIN

TO-252(DPAK)
top view

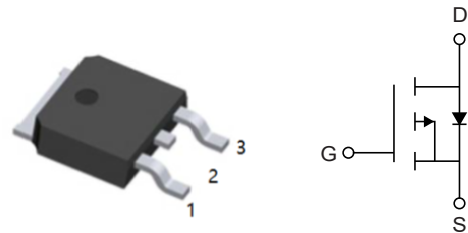



4. Absolute Maximum Ratings

Parameter		Symbol	Rating	Units
Drain-Source Voltage		V_{DS}	-60	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current, V_{GS} @ -10V ¹	$T_C=25^{\circ}\text{C}$	I_D	-20	A
Continuous Drain Current, V_{GS} @ -10V ¹	$T_C=100^{\circ}\text{C}$		-12	A
Continuous Drain Current, V_{GS} @ -10V ¹	$T_A=25^{\circ}\text{C}$		-4.3	A
Continuous Drain Current, V_{GS} @ -10V ¹	$T_A=70^{\circ}\text{C}$		-3.5	A
Pulsed Drain Current ²		I_{DM}	-36	A
Single Pulse Avalanche Energy ³		E_{AS}	35.4	mJ
Avalanche Current		I_{AS}	-26.6	A
Total Power Dissipation ⁴	$T_C=25^{\circ}\text{C}$	P_D	34.7	W
Total Power Dissipation ⁴	$T_A=25^{\circ}\text{C}$		2	W
Storage Temperature Range		T_J	-55 to 150	$^{\circ}\text{C}$
Operating Junction Temperature Range		T_{STG}	-55 to 150	$^{\circ}\text{C}$
Thermal Resistance Junction-Ambient ¹		$R_{\theta JA}$	62	$^{\circ}\text{C/W}$
Thermal Resistance Junction-Case ¹		$R_{\theta JC}$	3.6	$^{\circ}\text{C/W}$



5. Electrical Characteristics @ $T_A = 25^\circ\text{C}$ (unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	-60			V
BV_{DSS} Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	Referenced to $25^\circ\text{C}, I_D=-1\text{mA}$		-0.03		V/ $^\circ\text{C}$
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{DS}=-10V, I_D=-12A$		53	75	m Ω
		$V_{GS}=-4.5V, I_D=-8A$		64	105	m Ω
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=-250\mu A$	-1.2	1.5	-2.5	V
$V_{GS(th)}$ Temperature Coefficient	$\Delta V_{GS(th)}$			4.56		mV/ $^\circ\text{C}$
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=-48V, V_{GS}=0V, T_J=25^\circ\text{C}$			-1	μA
		$V_{DS}=-48V, V_{GS}=0V, T_J=55^\circ\text{C}$			-5	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$			± 100	nA
Forward Transconductance	g_{FS}	$V_{DS}=-5V, I_D=-12A$		15.4		S
Gate Resistance	R_g	$V_{DS}=0V, V_{GS}=0V, f=1\text{MHz}$		13.5		Ω
Total Gate Charge (-4.5V)	Q_g	$V_{DS}=-48V, I_D=-10A$ $V_{GS}=-4.5V$		9.86		nC
Gate-Source Charge	Q_{gs}			3.08		nC
Gate-Drain Charge	Q_{gd}			2.95		nC
Turn-On Delay Time	$t_{D(on)}$	$V_{DD}=-15V, I_D=-1A$ $V_{GS}=-10V, R_G=3.3\Omega$		28.8		ns
Rise Time	t_r			19.8		ns
Turn-Off Delay Time	$t_{D(off)}$			60.8		ns
Fall Time	t_f			7.2		ns
Input Capacitance	C_{iss}	$V_{DS}=-15V, V_{GS}=0V, f=1\text{MHz}$		1447		pF
Output Capacitance	C_{oss}			97.3		pF
Reverse Transfer Capacitance	C_{rss}			70		pF
Continuous Source Current ^{1,5}	I_S	$V_G=V_D=0V, \text{Force Current}$			-18	A
Pulsed Source Current ^{2,5}	I_{SM}				-36	A
Diode Forward Voltage ²	V_{SD}	$V_{GS}=0V, I_S=-1A, T_J=25^\circ\text{C}$			-1.2	V



6.1 Typical Characteristics

Figure 1: Typical Output Characteristics	Figure 2: On-Resistance v.s Gate-Source
Figure 3: Forward Characteristics of Reverse	Figure 4: Gate-Charge Characteristics
Figure 5: Normalized $V_{GS(th)}$ v.s T_J	Figure 6: Normalized $R_{DS(ON)}$ v.s T_J



6.2 Typical Characteristics

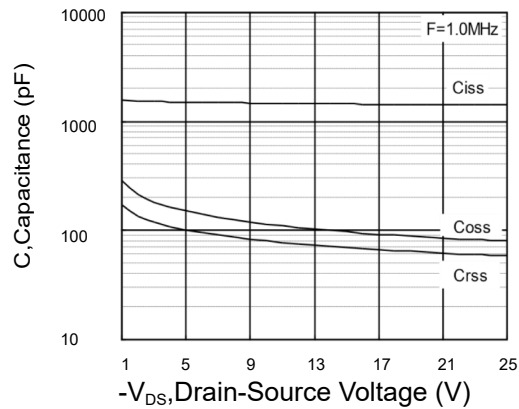


Figure 7: Capacitance

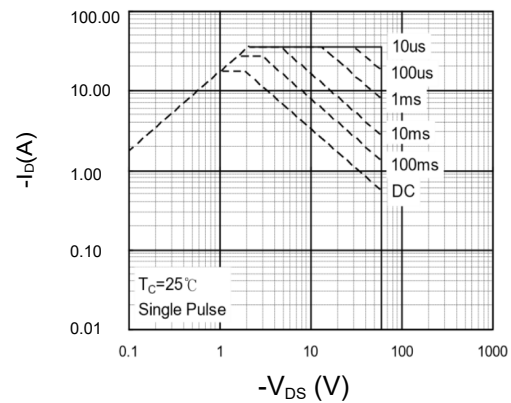


Figure 8: Safe Operating Area

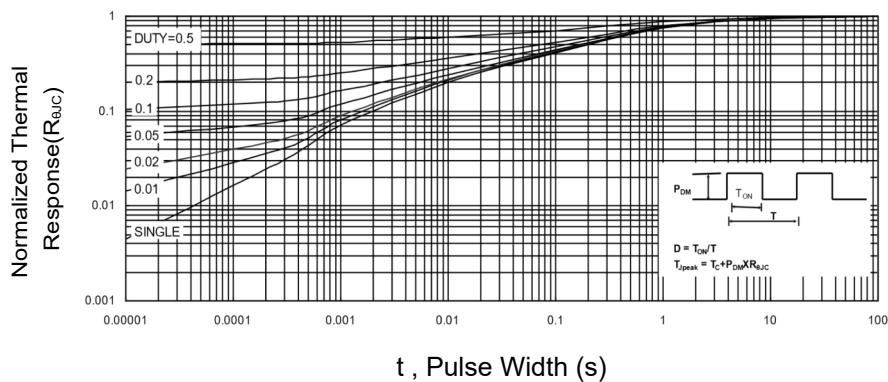


Figure 9: Normalized Maximum Transient Thermal Impedance

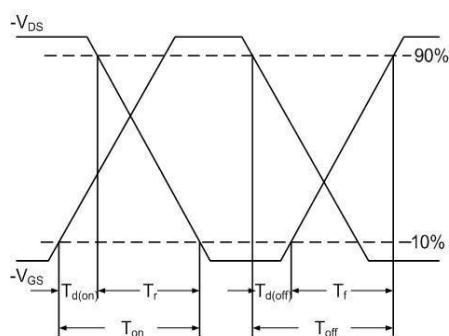


Figure 10: Switching Time Waveform


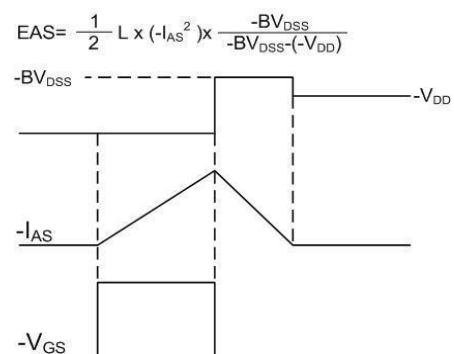


Figure 11: Unclamped Inductive Waveform



7.TO-252 Package Outline Dimensions

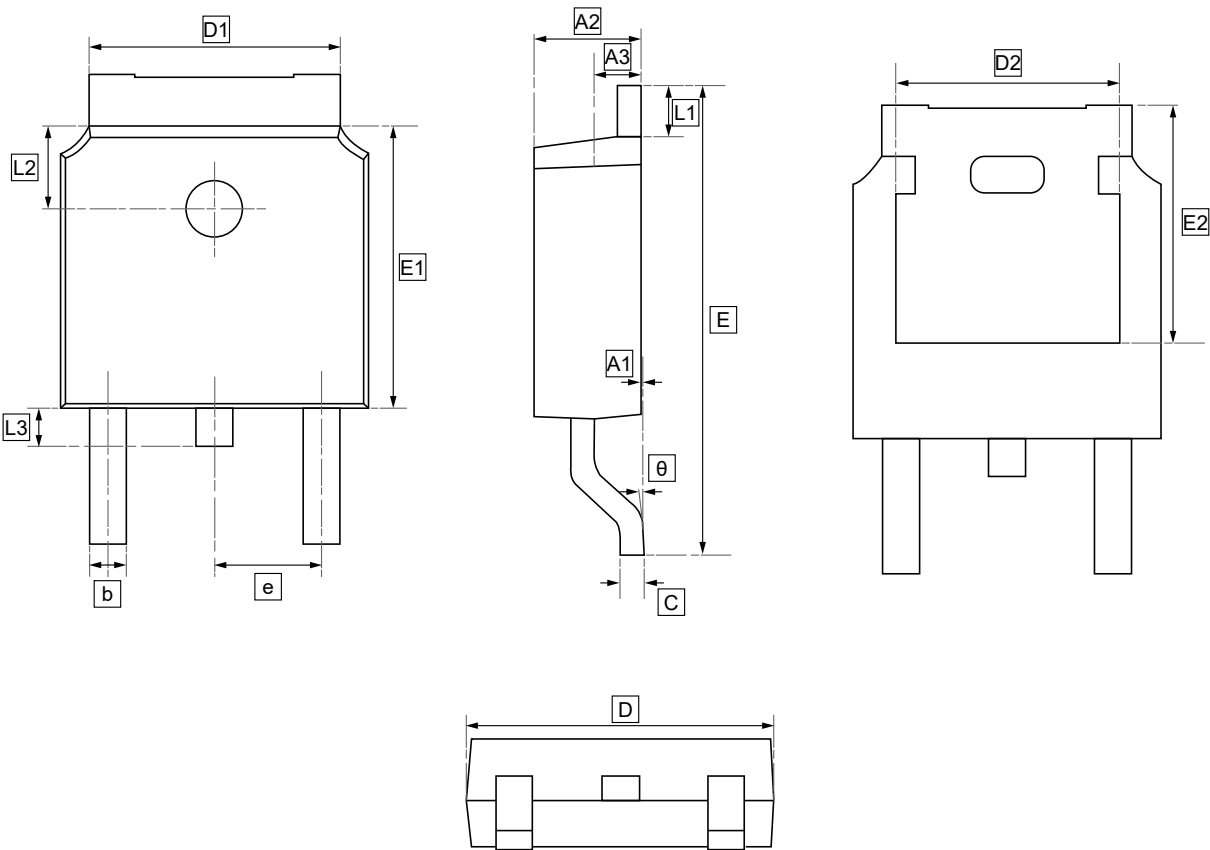


DIMENSIONS (mm are the original dimensions)

Symbol	A1	A2	A3	b	c	D	D1	D2	E	E1	E2	e	L1	L2	L3	θ
Min	0.00	2.18	0.90	0.65	0.46	6.35	4.95	4.32	9.40	5.97	5.21	2.286 BSC	0.89	1.70	0.60	0.00
Max	0.13	2.39	1.10	0.85	0.61	6.73	5.46	4.90	10.41	6.22	5.38		1.27	1.90	1.00	8.00



8.Ordering information



yy: Year Code
ww: Week Code

Order Code	Package	Base QTY	Delivery Mode
UMW IRFR9024NTR	TO-252	2500	Tape and reel



9.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.