

## DFN1006-2L Plastic-Encapsulate ESD Protection Diodes



### Features

- Low leakage current
- DFN1006-2L surface mount package
- IEC 61000-4-2 (ESD Air):  $\pm 20\text{kV}$
- IEC 61000-4-2 (ESD Contact):  $\pm 20\text{kV}$
- IEC 61000-4-5 (Lightning 8/20 $\mu\text{s}$ ): 4A

### Applications

- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation, Digital Cameras
- Peripherals, Audio Players, Industrial Equipment

### Function Diagram



**Reverse Working Voltage**  
5V Max.  
**Low capacitance**  
0.5pF(Typ)




### Maximum Ratings (Ta=25°C Unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>ESD</sub>	Electrostatic Discharge Voltage	ESD per IEC 61000-4-2( Air )	$\pm 20$	KV
		ESD per IEC 61000-4-2( Contact)	$\pm 20$	KV
P <sub>PP</sub>	Peak Pulse Power	tp = 8/20 $\mu\text{s}$	80	W
I <sub>PP</sub>	Rated Peak Pulse Current	tp = 8/20 $\mu\text{s}$	4.0	A
T <sub>J</sub>	Operating JunctionTemperature Range	—	-55 to +150	°C
T <sub>STG</sub>	Operating JunctionTemperature Range	—	-55 to +150	°C

### Electrical Parameter





SYMBOL	PARAMETER
I <sub>PP</sub>	Peak Pulse Current @8/20 $\mu\text{s}$
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
I <sub>BR</sub> / I <sub>T</sub>	Test Current
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
V <sub>RWM</sub>	Peak Reverse Working Voltage
I <sub>R</sub>	Reverse Leakage Current @ V <sub>RWM</sub>
I <sub>TRIG</sub>	Reverse Trigger Current
V <sub>TRIG</sub>	Reverse Trigger Voltage
I <sub>HOLD</sub>	Reverse Holding Current
V <sub>HOLD</sub>	Reverse Holding Voltage
P <sub>PP</sub>	Peak Pulse Power Dissipation

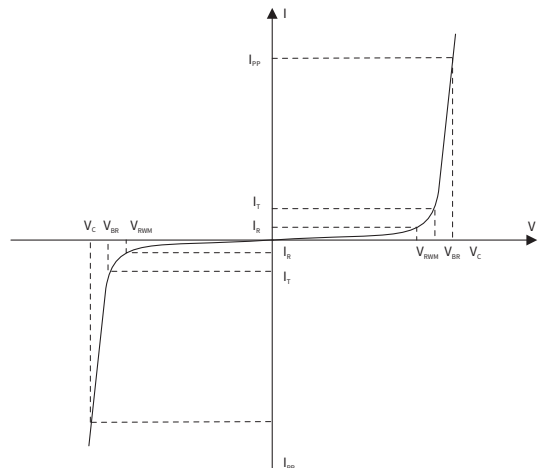

● **Electrical Characteristics** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	CONDITION	Min	Typ	Max	UNIT
Peak Reverse Working Voltage	$V_{RWM}$	$T_a=25^\circ\text{C}$	—	—	5.0	V
Breakdown Voltage	$V_{BR}$	$I_R=1\text{mA}, T_a=25^\circ\text{C}$	5.8	—	—	V
Reverse Leakage Current	$I_R$	$V_R=5.0\text{V}, T_a=25^\circ\text{C}$	—	—	0.5	$\mu\text{A}$
Clamping Voltage	$V_C$	$I_{PP}=4\text{A}, t_p=8/20\mu\text{s}$	—	15	20	V
Junction Capacitance	$C_J$	$V_R=0\text{V}, f=1\text{MHz}$	—	0.5	—	pF


● **Ratings And Characteristics Curves** (Ta=25°C Unless otherwise specified)

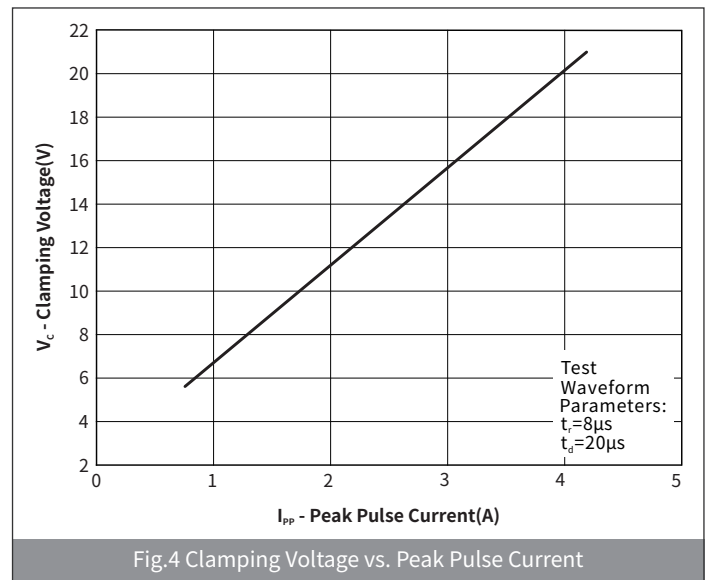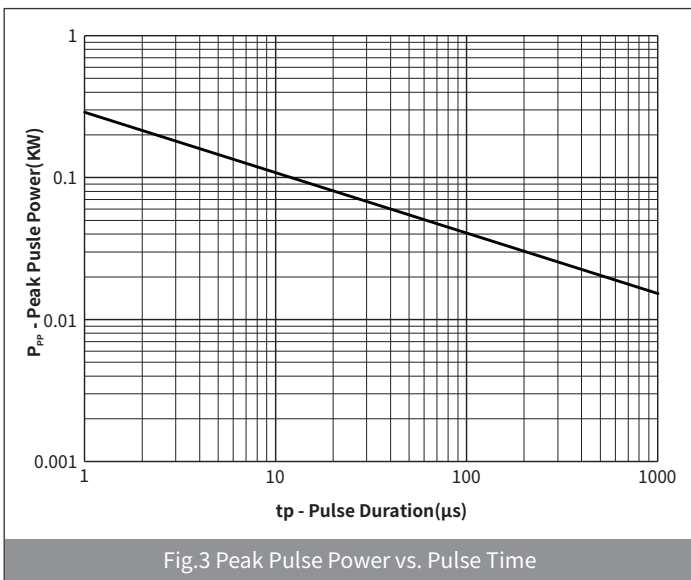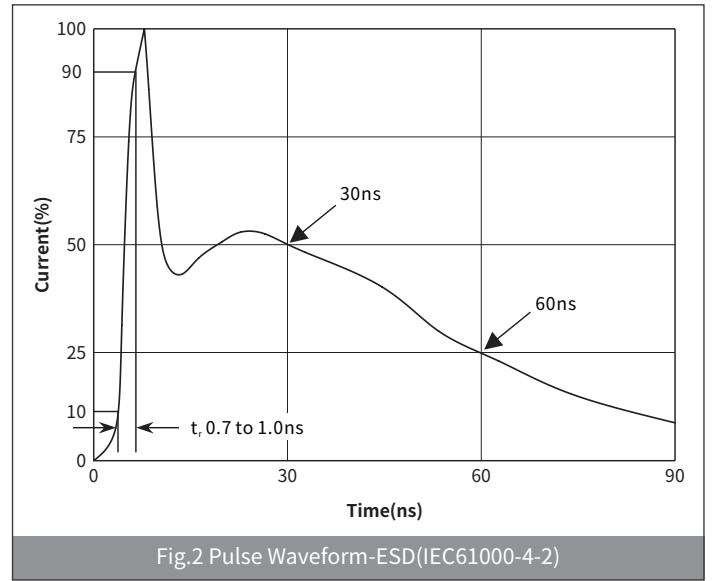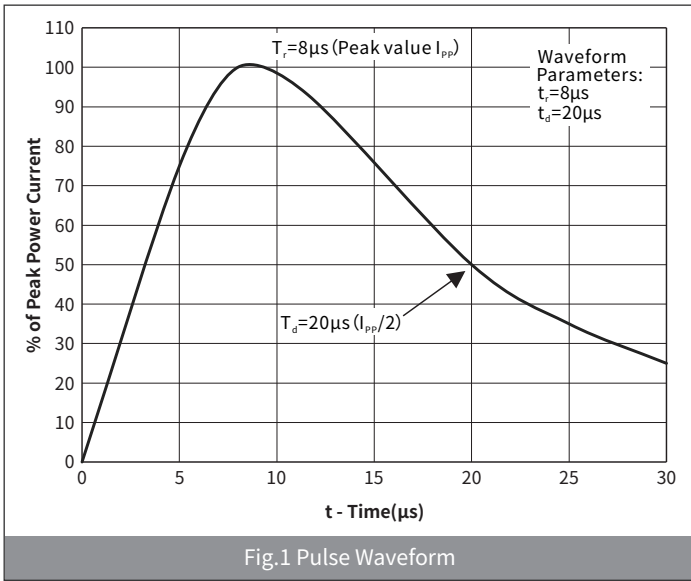


## Ordering Information

PREFERRED P/N	PACKAGE	SIZE(mm)	DELIVERY MODE	MPQ(PCS)
ESD5311N	DFN1006-2L	1.00×0.60×0.37	7" REEL	10,000

## Recommended Soldering Conditions

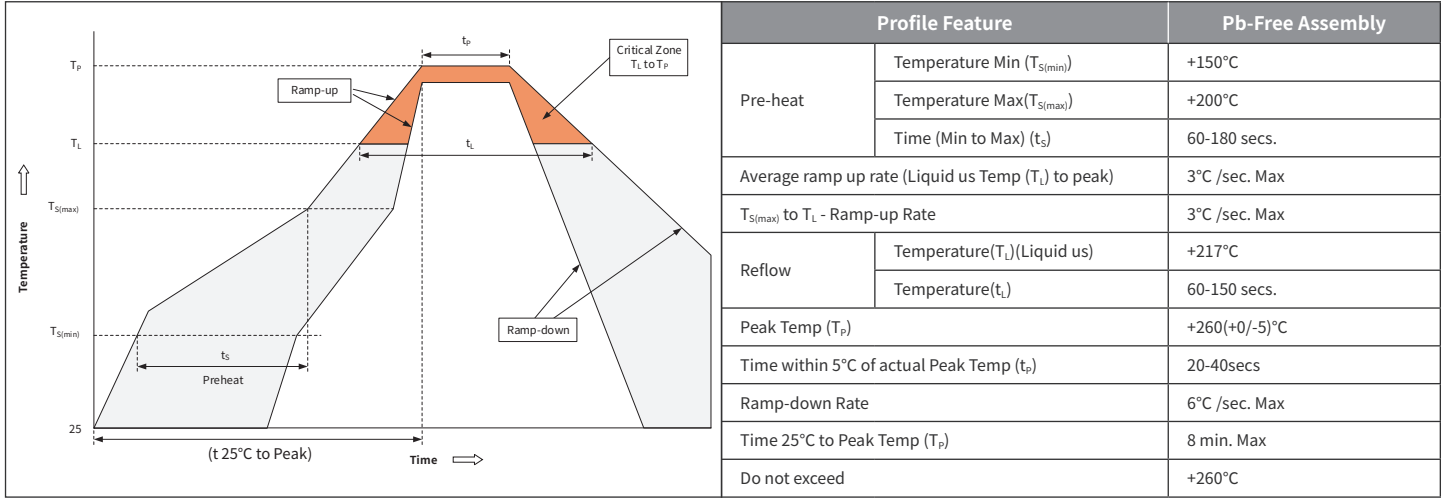

## Package Outline Dimensions (DFN1006-2L)

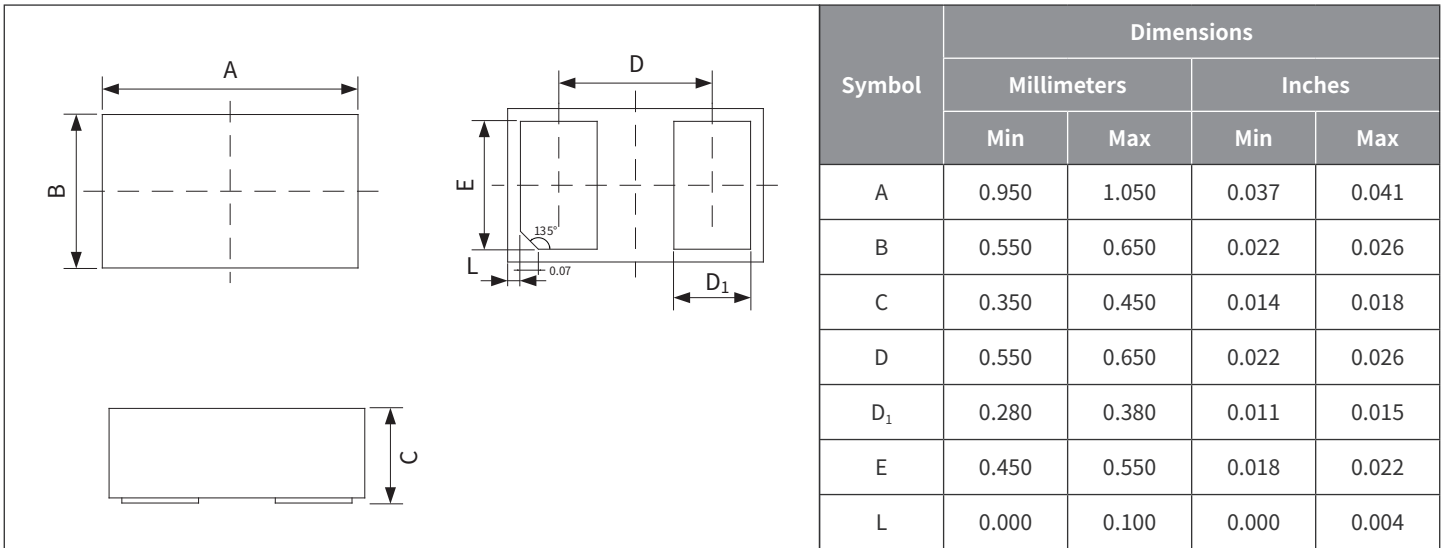

## Suggested Pad Layout

