

DESCRIPTION

The PMV45EN2R-JSM is the N-Channel logic enhancement mode power field effect transistor is produced using high cell density advanced trench technology..



This high density process is especially tailored to minimize on-state resistance. These devices are particularly suited for low voltage application, and low in-line power loss are needed in a very small outline surface mount package.

FEATURE

- ◆ 30V/6.0A, $R_{DS(ON)}=18m\Omega(\text{typ.})@V_{GS}=10V$
- ◆ 30V/4.8A, $R_{DS(ON)}=25m\Omega(\text{typ.})@V_{GS}=4.5V$
- ◆ Super high design for extremely low $R_{DS(ON)}$
- ◆ Exceptional on-resistance and Maximum DC current capability
- ◆ Full RoHS compliance
- ◆ SOT23 package design

APPLICATIONS

- ◆ Power Management
- ◆ Portable Equipment
- ◆ DC/DC Converter
- ◆ Load Switch
- ◆ DSC

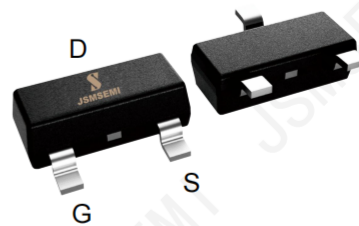

Schematic diagram

ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}C$ Unless otherwise noted)

Symbol	Parameter		Typical	Unit
V _{DSS}	Drain-Source Voltage		30	V
V _{GSS}	Gate-Source Voltage		±20	V
I _D	Continuous Drain Current (T _C =25℃)	V _{GS} =10V	6.0	A
	Continuous Drain Current (T _C =70℃)		5.0	
I _{DM}	Pulsed Drain Current		20	A
I _S	Continuous Source Current (Diode Conduction)		1.5	A
P _D	Power Dissipation	T _A =25℃	1.5	W
		T _A =70℃	0.9	
T _J	Operation Junction Temperature		150	℃
T _{STG}	Storage Temperature Range		-55~+150	℃
R _{θJA}	Thermal Resistance Junction to Ambient		90	℃/W

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress rating only and functional device operation is not implied







ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ Unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Parameters						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	30			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	1		2	V
I _{GSS}	Gate Leakage Current	V _{DS} =0V, V _{GS} =±20V			±100	nA
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =24V, V _{GS} =0			1	uA
		V _{DS} =24V, V _{GS} =0 T _J =55℃			5	
R _{DS(ON)}	Drain-Source On-Resistance	V _{GS} =10V, I _D =6.0A		18	30	mΩ
		V _{GS} =4.5V, I _D =4.8A		25	40	
Source-Drain Diode						
V _{SD}	Diode Forward Voltage	I _S =1.0A, V _{GS} =0V		0.7	1.0	V
Dynamic Parameters						
Q _g	Total Gate Charge	V _{DS} =20V V _{GS} =4.5V I _D =6.0A		6		nC
Q _{gs}	Gate-Source Charge			1.1		
Q _{gd}	Gate-Drain Charge			2.5		
C _{iss}	Input Capacitance	V _{DS} =15V V _{GS} =0V f=1MHz		414		pF
C _{oss}	Output Capacitance			60		
C _{rss}	Reverse Transfer Capacitance			49		
T _{d(on)}	Turn-On Time	V _{DS} =15V I _D =5A		7.5		nS
T _r				45		
T _{d(off)}	Turn-Off Time	V _{GEN} =10V R _G =3.3Ω		10		
T _f				4		

Note: 1. Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$


2. Static parameters are based on package level with recommended wire bonding

TYPICAL CHARACTERISTICS (25°C Unless Note)

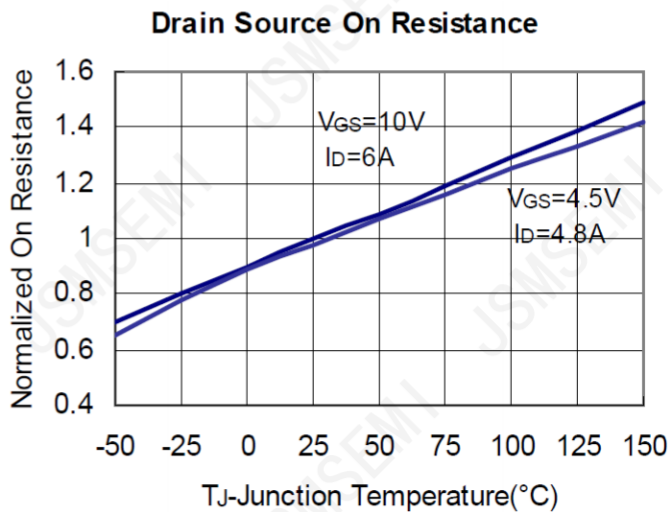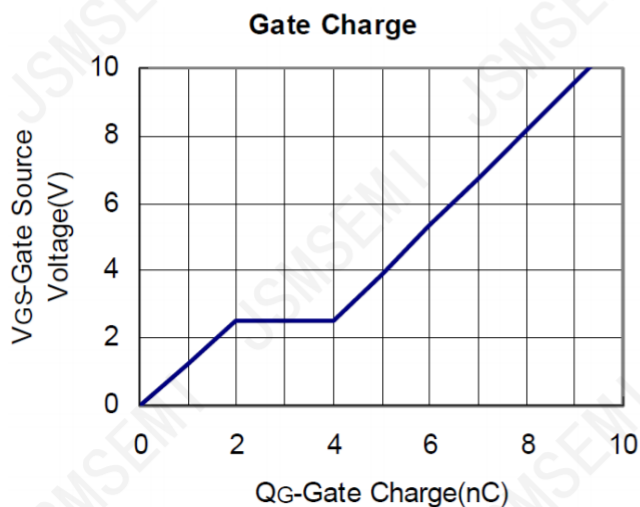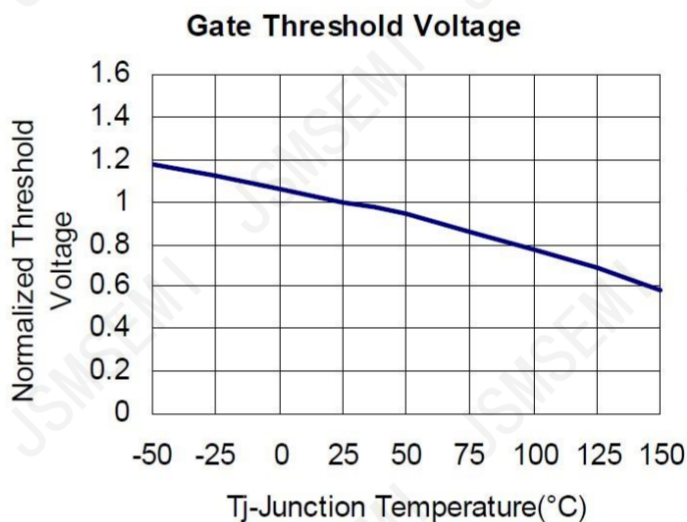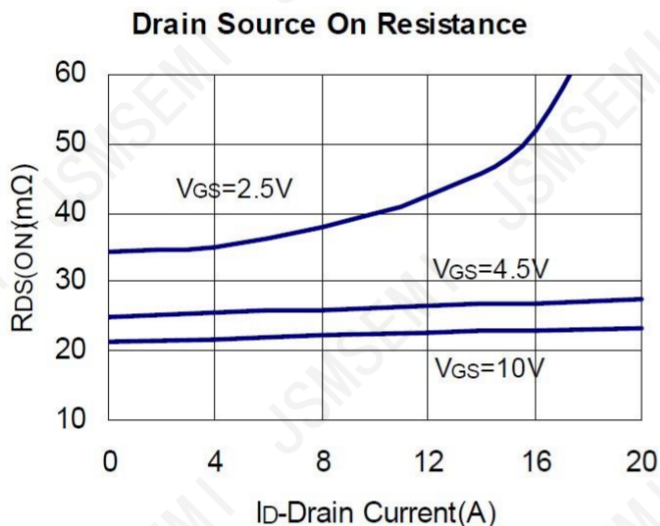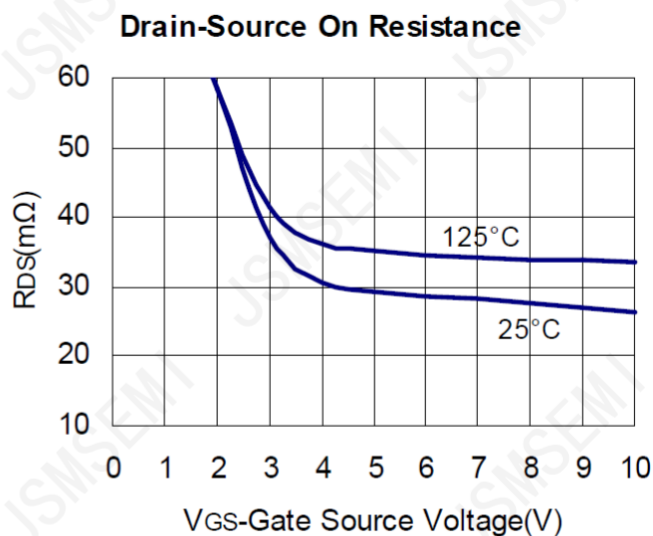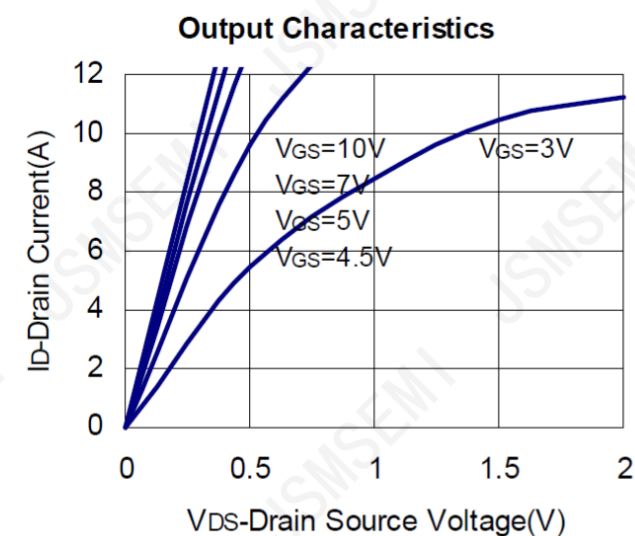


TYPICAL CHARACTERISTICS (continuous)


Source Drain Diode Forward

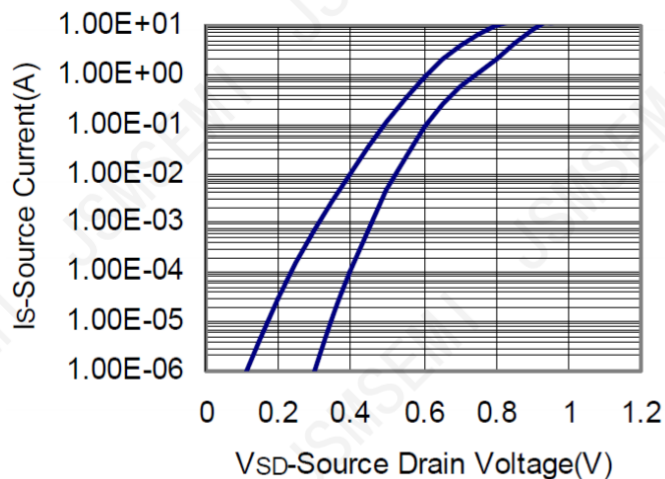


Capacitance

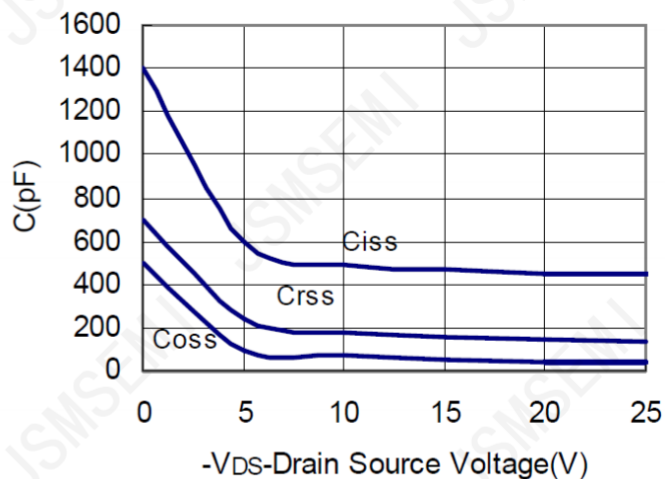


Power Dissipation

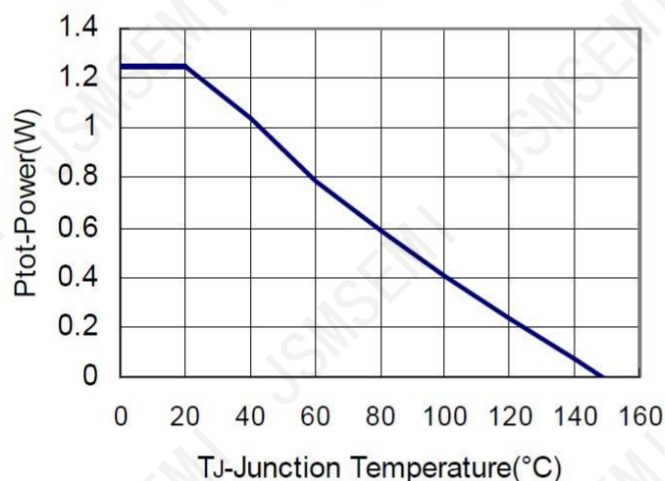

Drain Current

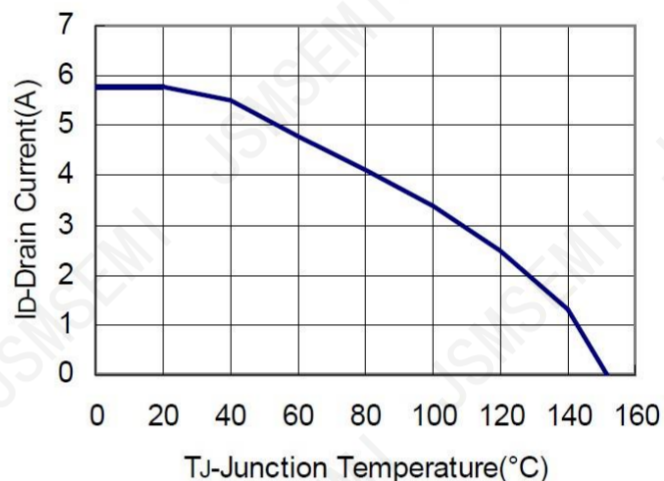


Thermal Transient Impedance

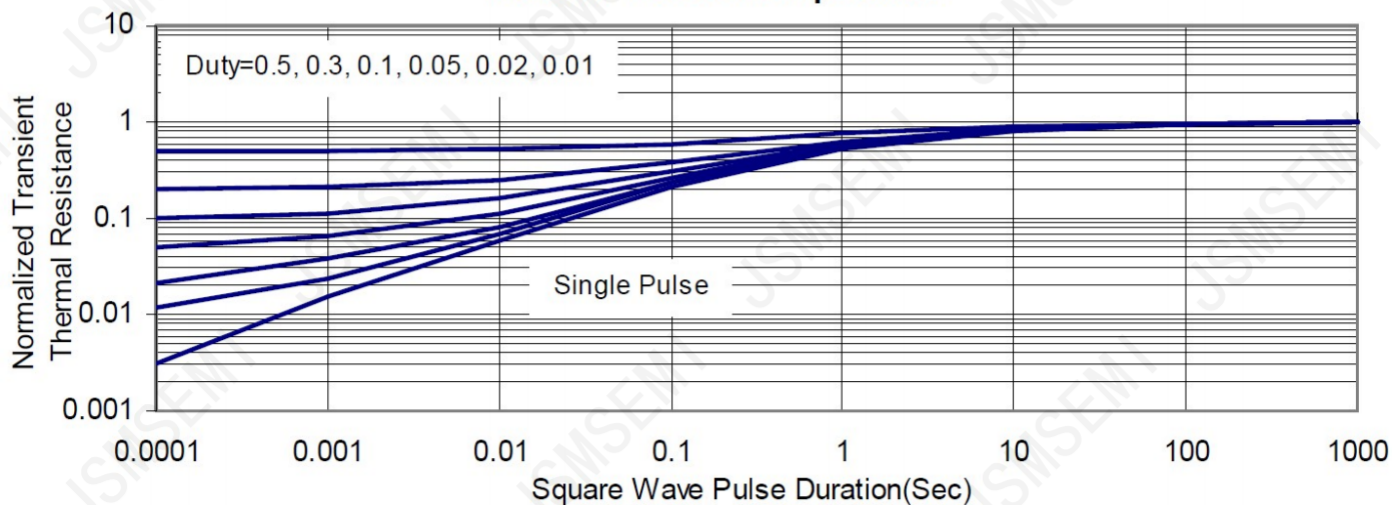

Package Information

SOT-23

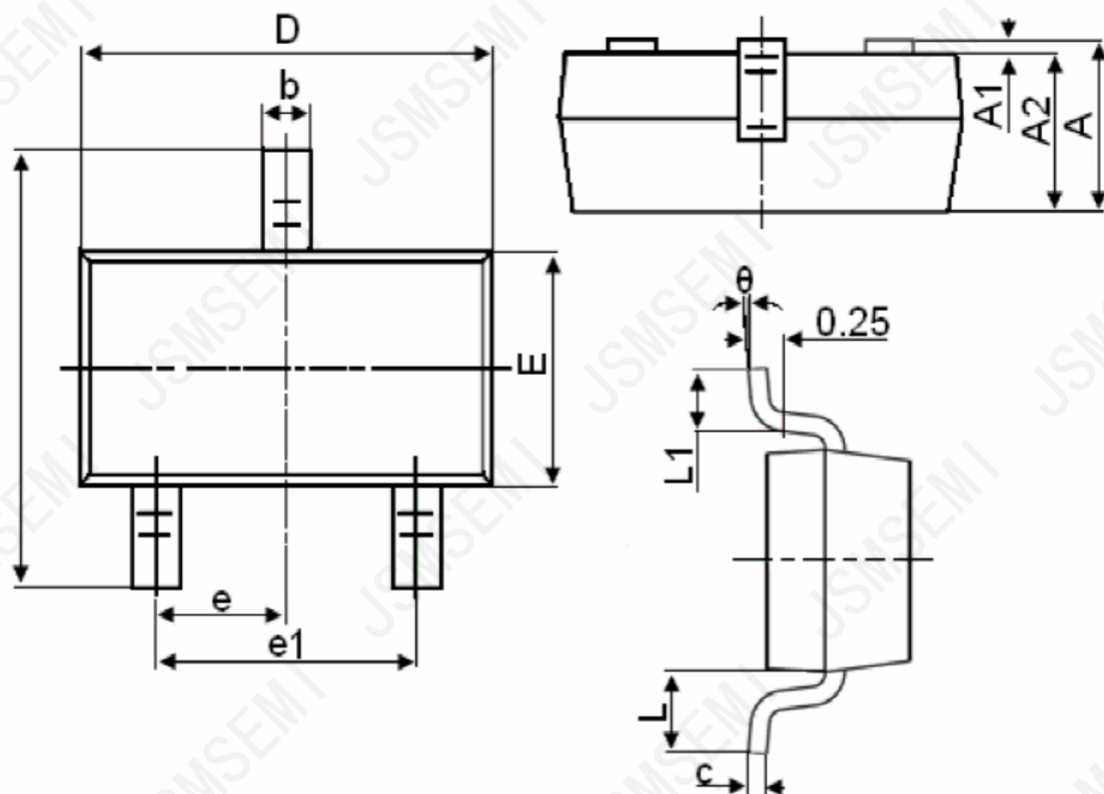

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.550REF		0.022REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsemsemi.com or visit www.jsemsemi.com