

SMAF Fast Recovery Diode 快恢复二极管



■Features 特点

Built-in strain relief 内应力释放
Fast Recovery time 快恢复时间
Surface mount device 表面贴装器件
Case 封装:SMAF



■Maximum Rating 最大额定值

($T_A=25^{\circ}\text{C}$ unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	RS2AF -6AF	RS2BF -6AF	RS2DF -6AF	RS2GF -6AF	RS2JF -6AF	RS2KF -6AF	RS2MF -6AF	Unit 单位
Marking 印字		RS2A	RS2B	RS2D	RS2G	RS2J	RS2K	RS2M	
Repetitive Peak Reverse Voltage 重复峰值反向电压	V_{RRM}	50	100	200	400	600	800	1000	V
DC Reverse Voltage 直流反向电压	V_R	50	100	200	400	600	800	1000	V
RMS Reverse Voltage 反向电压均方根值	$V_{R(RMS)}$	35	70	140	280	420	560	700	V
Forward Rectified Current 正向整流电流	I_F	2							A
Peak Surge Current 峰值浪涌电流	I_{FSM}	50							A
Thermal Resistance J-A 结到环境热阻	$R_{\theta JA}$	65							$^{\circ}\text{C/W}$
Junction/Storage Temperature 结温/储藏温度	T_J, T_{stg}	$-50\text{to}+150^{\circ}\text{C}$							

■Electrical Characteristics 电特性

($T_A=25^{\circ}\text{C}$ unless otherwise noted 如无特殊说明, 温度为 25°C)

Characteristic 特性参数	Symbol 符号	RS2AF~RS2GF -6AF	RS2JF -6AF	RS2KF~RS2MF -6AF	Unit 单位	Condition 条件
Forward Voltage 正向电压	V_F	1.3			V	$I_F=2\text{A}$
Reverse Current 反向电流	I_R	5($T_A=25^{\circ}\text{C}$) 150($T_A=100^{\circ}\text{C}$)			μA	$V_R=V_{RRM}$
Reverse Recovery Time 反向恢复时间	T_{rr}	150	250	500	nS	$I_F=0.5\text{A}, I_R=1\text{A}$ $I_{rr}=0.25\text{A}$
Junction Capacitance 结电容	C_J	50			pF	$V_R=4\text{V}$, $f=1\text{MHz}$

■ Typical Characteristic Curve 典型特性曲线

FIG.1-TYPICAL FORWARD CHARACTERISTICS

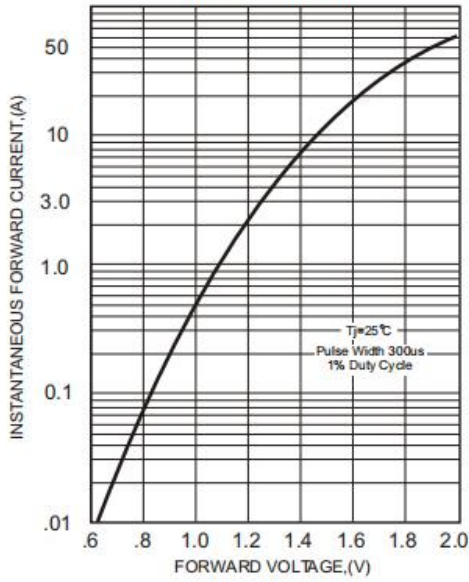


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


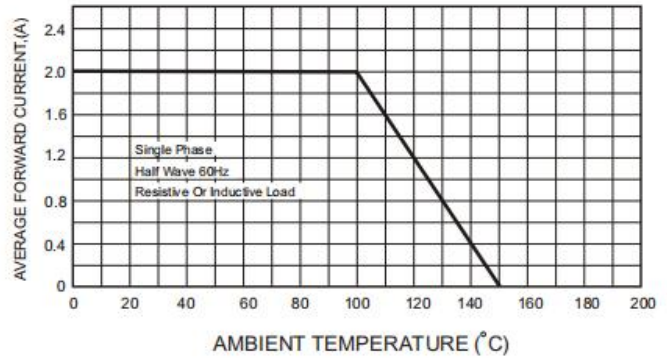


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

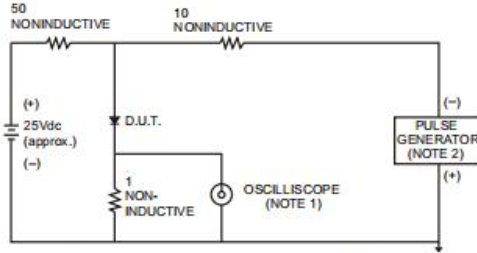

NOTES: 1. Rise Time $\leq 7\text{ns}$ max., Input Impedance $\approx 1\text{ megohm}$, 22pF .

2. Rise Time $\leq 10\text{ns}$ max., Source Impedance $\approx 50\text{ ohms}$.

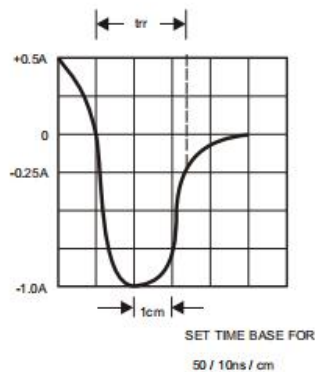


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT



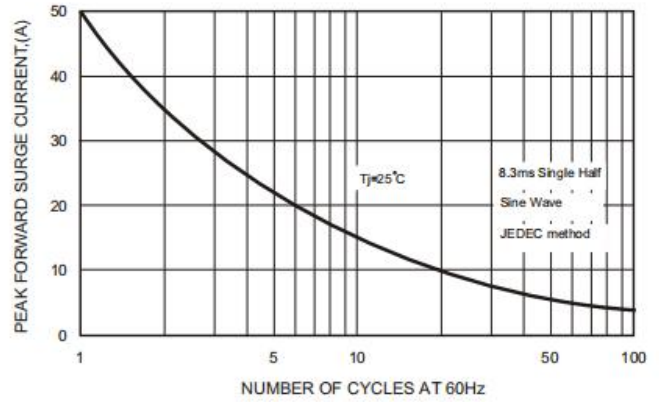


FIG.5-TYPICAL JUNCTION CAPACITANCE

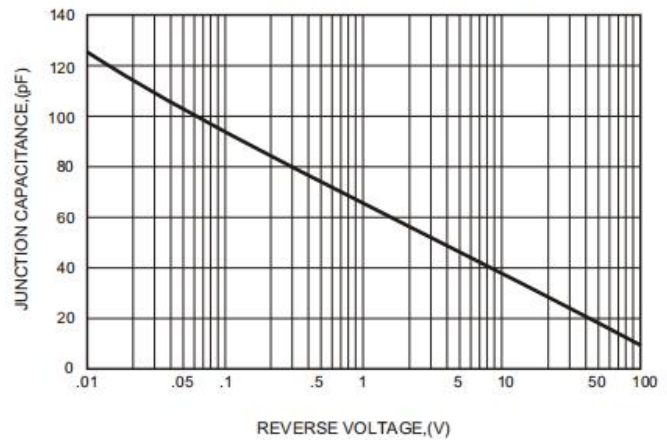

■Dimension 外形封装尺寸

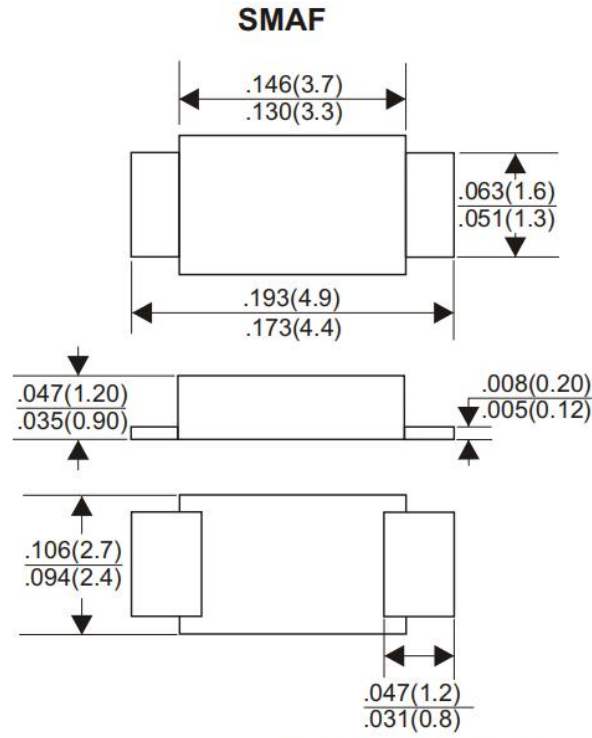

Dimensions in inches and (millimeters)