



◆特征:

- 适用大电流的片式共模滤波器.
- 高的阻抗特性, 能高效抑制共模噪音效果.
- 由于是低高度设计, 因此适合表面安装.
- 符合 RoHS, 无卤和 REACH
- 符合 AEC-Q200

◆用途:

- 包括车载动力传动用途的各种 DC 电源线、多媒体设备、各种电子产品的电源线的共模噪音对策.
- 无线充电电源装置.

◆环境:

- 工作温度: -40至+150 °C
(包括线圈自身温升)

◆试验设备:

- 电流: HP4284+42841A 或同等仪器
- 阻抗: E4991+ HP16092 测试夹具或同等仪器
- 直流电阻: Chroma 16502 或同等仪器

◆产品型号:

SMCM

①

7060

②

A

③

701

④

T

⑤

类型 Type

SMCM

贴片共模滤波器
SMD Common Mode
Line Filter

外形尺寸(L×W×H) (mm)

External Dimensions (L×W×H)
(mm)

7060

7.0×6.0×3.8

A

Automotive

④

Impedance

700 Ω

⑤

包装 Packing

B 散装 Bulk Package

T 编带 Tape & Reel

Features:

- Chip common mode filter for large current applications
- Excellent impedance characteristics, making it great for suppressing common mode noise.
- Low profile design makes it optimal for surface mounting the height has been reduced
- RoHS, Halogen Free and REACH Compliance
- AEC-Q200 Compliant

Applications:

- Measures against common mode noise in power lines for various DC power lines, multimedia devices, and various electronic devices, electronic devices, including automotive power trains.
- Wireless charging and power device design.

Environmental Data:

- Operating Temperature: -55°C to +155°C
(Including coils self-temperature rise)

Test Equipment:






- Isat & Irms: HP4284+42841A or equivalent
- Impedance: E4991 analyzer with HP16092 test fixture or equivalent
- DCR: Chroma 16502 or equivalent

Product Identification:

Common Mode Choke

◆ 外观尺寸:

Shape and Dimensions(dimensions are in mm):

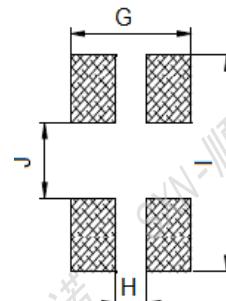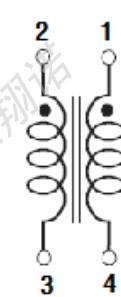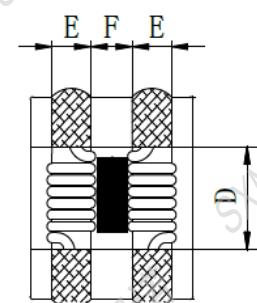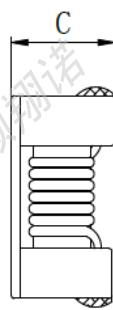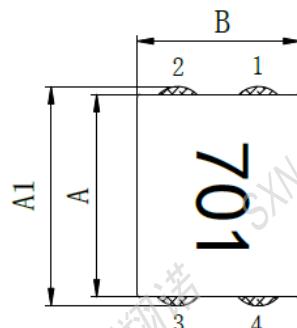

Schematic

Recommended

Land Pattern

| P/N | A | A1 | B | C | D | E | F | G | H | I | J |
|-----------|-----------|-----------|-----------|------|------|------|------|------|------|------|------|
| | ± 0.5 | ± 0.5 | ± 0.5 | Max | Typ |
| SMCM7060A | 7.00 | 7.50 | 6.00 | 3.80 | 3.50 | 1.50 | 1.70 | 5.00 | 1.50 | 8.00 | 3.00 |

◆ 规格特性:


Specifications:

- SMCM7060A Series Electrical Characteristics (Electrical specifications at 25°C)

| Part Number | Impedance (Ω) @100MHz | | DC Resistance ($m\Omega$) Max | Rated Current (A) Max | Rated Voltage (V) Max | Insulatio Resistance ($M\Omega$) Min | Marking |
|----------------|-----------------------------------|------|---------------------------------------|-----------------------------|-----------------------------|--|---------|
| | Min | Typ | | | | | |
| SMCM7060A-400T | 40 | 70 | 5 | 15.0 | 125 | 10M | 400 |
| SMCM7060A-101T | 100 | 140 | 10 | 9.0 | 125 | 10M | 101 |
| SMCM7060A-301T | 225 | 300 | 10 | 5.0 | 125 | 10M | 301 |
| SMCM7060A-501T | 275 | 450 | 10 | 5.0 | 125 | 10M | 501 |
| SMCM7060A-601T | 500 | 700 | 15 | 4.0 | 125 | 10M | 601 |
| SMCM7060A-701T | 500 | 700 | 15 | 4.0 | 125 | 10M | 701 |
| SMCM7060A-102T | 800 | 1020 | 17 | 3.0 | 125 | 10M | 102 |
| SMCM7060A-132T | 910 | 1300 | 21 | 2.5 | 125 | 10M | 132 |
| SMCM7060A-272T | 2000 | 2700 | 63 | 1.0 | 125 | 10M | 272 |
| SMCM7060A-302T | 2500 | 3000 | 75 | 0.9 | 125 | 10M | 302 |









- Rated Current: the actual value of DC current when the temperature rise is ΔT 40°C (Ta=25°C).

• Circuit: Test Mode

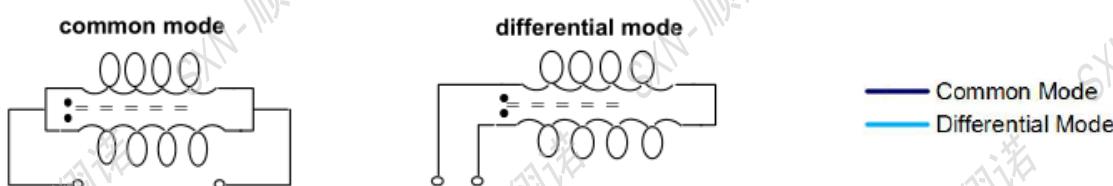


Common Mode Choke


• Typical Impedance versus Frequency

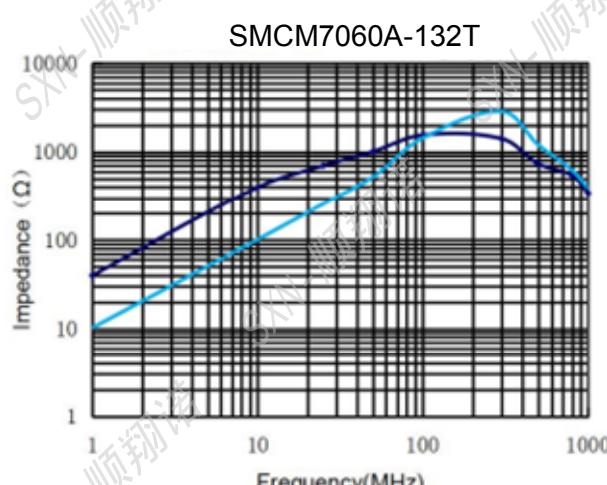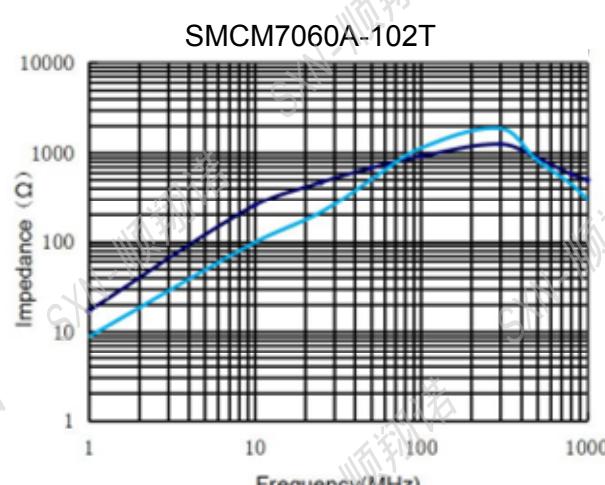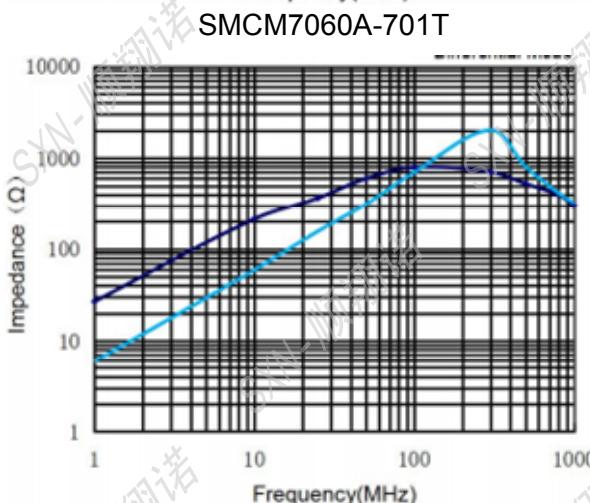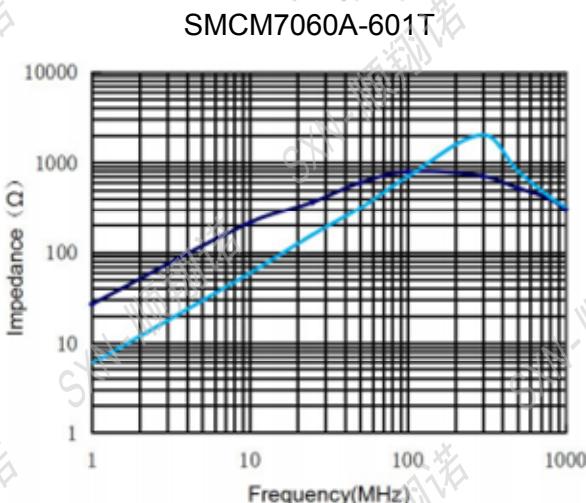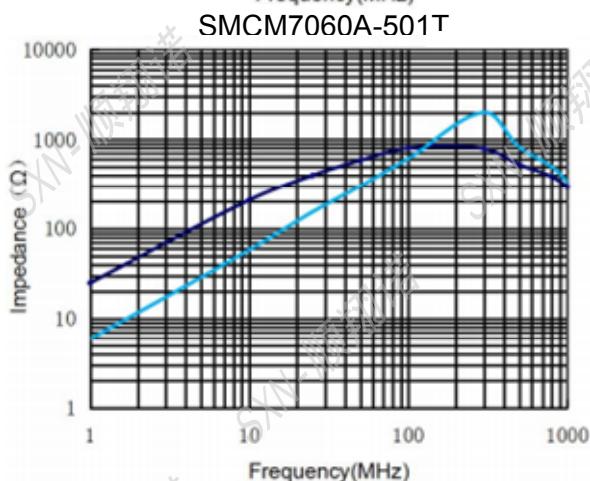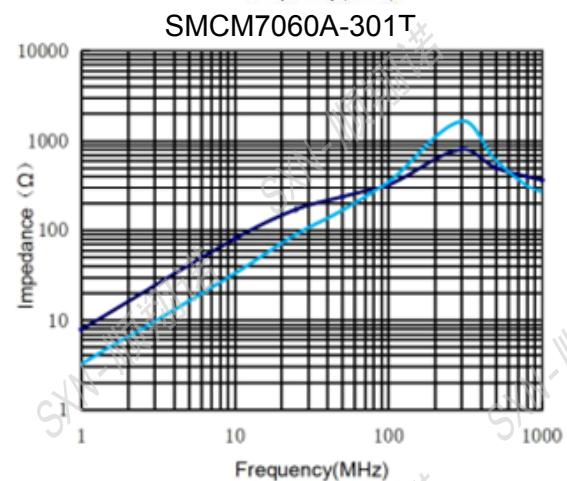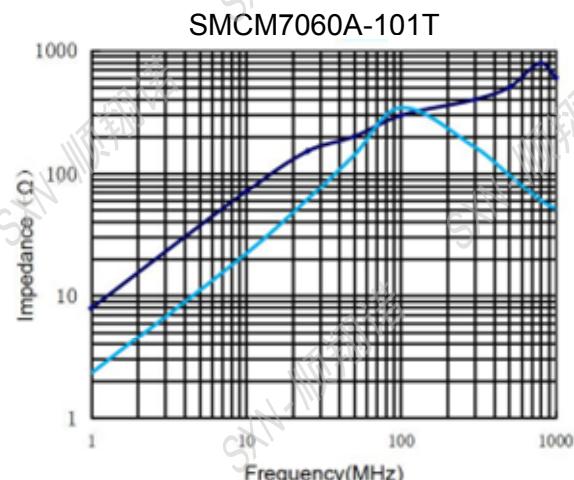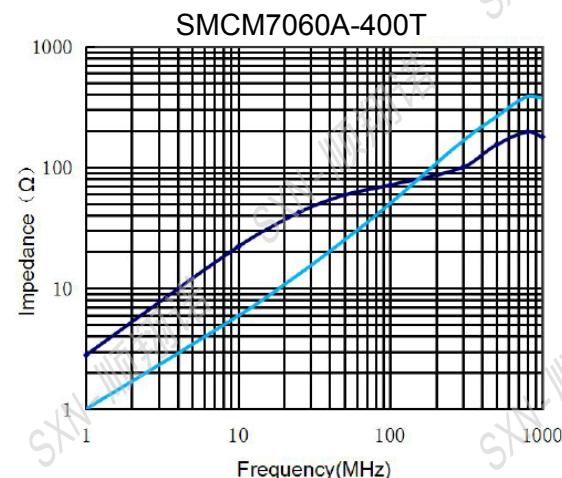

SMCM7060A-272T

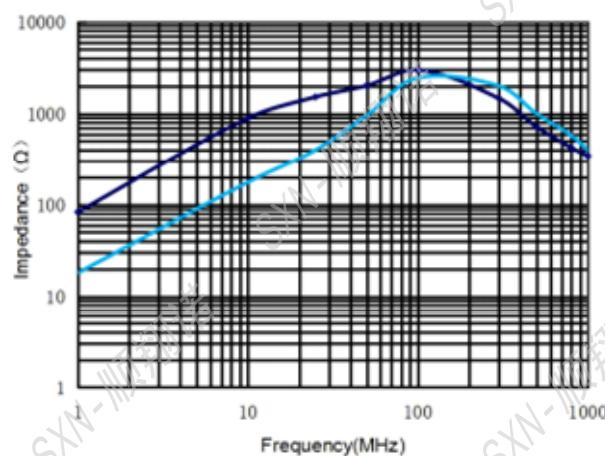


SMCM7060A-302T

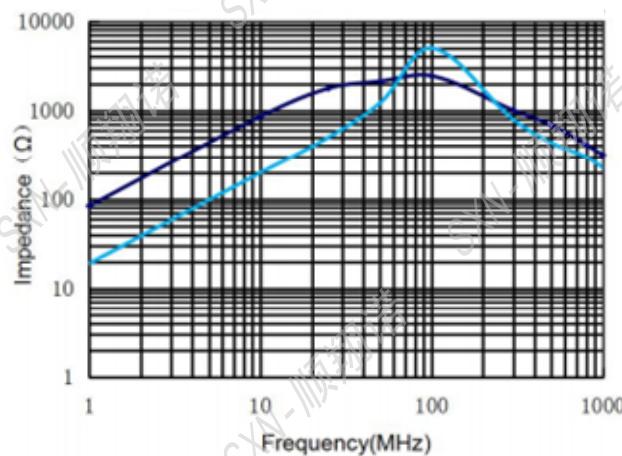


◆ 产品包装:


- Tape and Reel Specifications: (Dimensions are in mm)

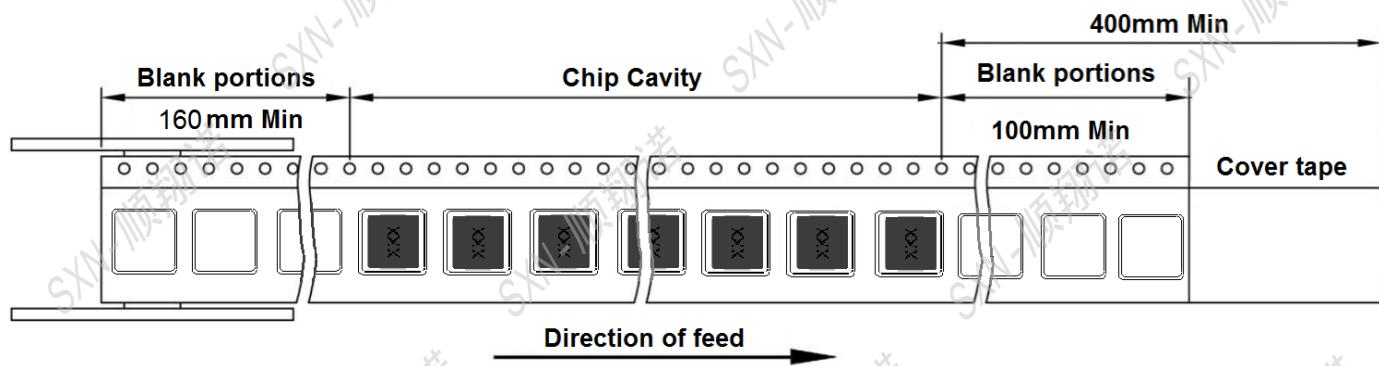

- Reel Dimensions (mm)

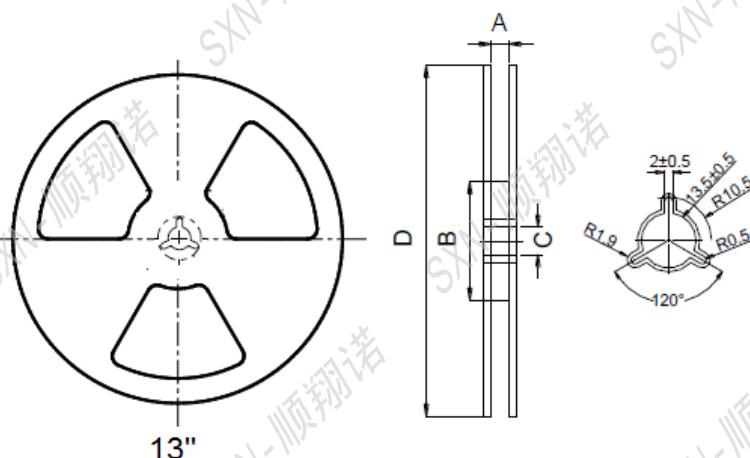


- Tape Dimension (mm)

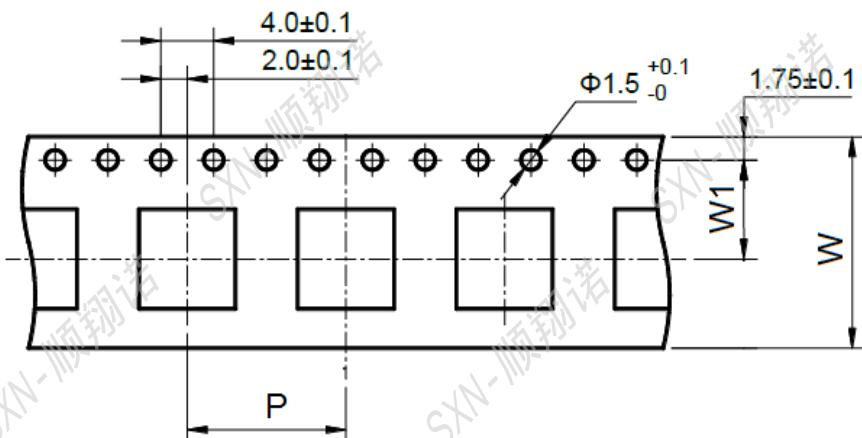


| Part No. | Tape Dimension | | | Reel Dimensions | | | | REEL (PCS) | Inside Box(PCS) | Outside Carton(PCS) |
|-----------|----------------|------|-----|-----------------|-----|----|-----|------------|-----------------|---------------------|
| | W | P | W1 | A | B | C | D | | | |
| SMCM7060A | 16.0 | 12.0 | 7.5 | 16.4 | 100 | 13 | 330 | 1500 | 4500 | 18,000 |


- Cover tape peel off condition

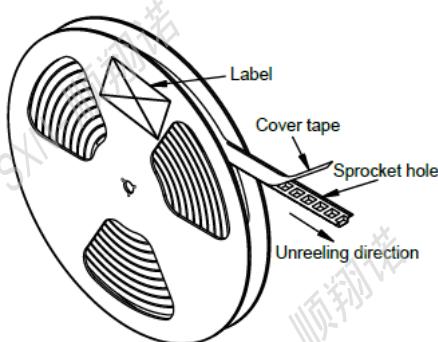

- a) Cover tape peel force shall be 10 to 120g
- b) Noodle strip peeling angle 165° to 180°


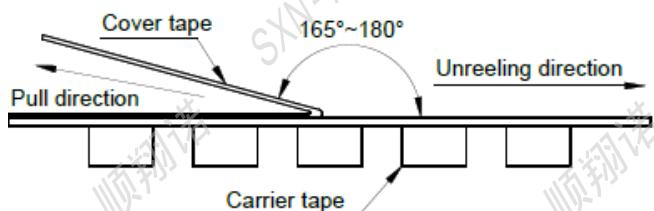






- Packing quantity


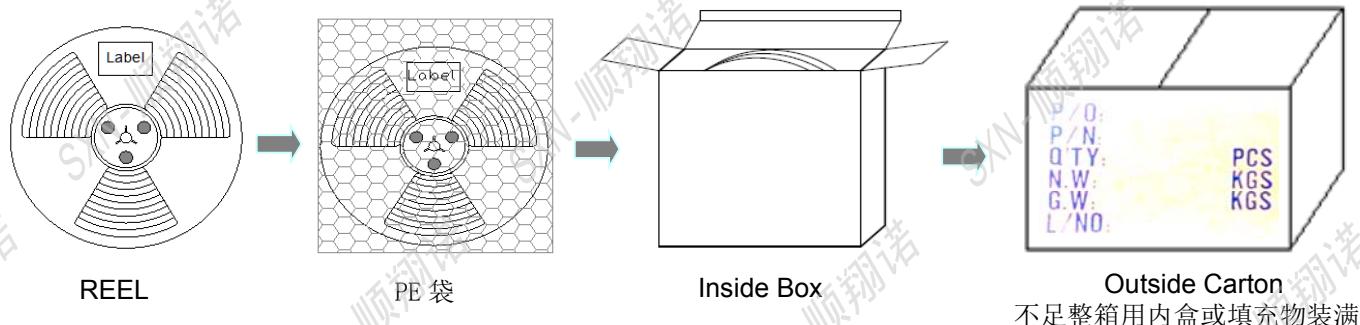


◆ 可靠性测试:

Reliability Testing:

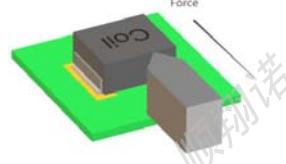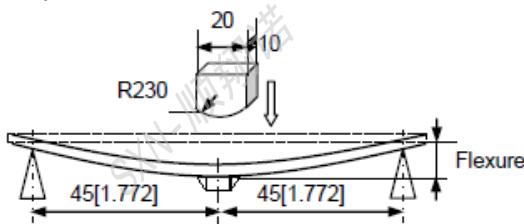
| Items | Requirements | Test Methods and Remarks |
|--|---|--|
| Terminal Strength Reference documents: GB/T 2423.60-2008 端子强度(SMT) | <p>1. Pulling test: Define: A: sectional area of terminal $A \leq 8\text{mm}^2$ force $\geq 5\text{N}$ time:30sec $8\text{mm}^2 < A \leq 20\text{mm}^2$ force $\geq 10\text{N}$ time: 10sec $20\text{mm}^2 < A$ force $\geq 20\text{N}$ time: 10sec</p> <p>2.Solder paste thickness:0.12mm</p> <p>3.Meet the above requirements without any loose terminal</p> | <p>Solder the inductor to the testing jig using leadfree solder. Then apply a force in the direction shown. Keep time: $10 \pm 1\text{s}$ Speed: 1.0mm/s.</p>  |
| Terminal Strength Reference documents: GB/T 2423.60-2008 端子强度(DIP) | <p>1.Terminal diameter(d) mm $0.35 < d \leq 0.50$ Applied force:5N Duration: 10sec</p> <p>2.Terminal diameter(d) mm $0.50 < d \leq 0.80$ Applied force:10N Duration: 10sec</p> <p>3.Terminal diameter(d) mm $0.80 < d \leq 1.25$ Applied force:20N Duration: 10sec</p> <p>4.Terminal diameter(d) mm $d > 1.25$ Applied force:40N Duration: 10sec</p> <p>5.Meet the above requirements without any loose terminal.</p> | <p>Pull Force: the force shall be applied gradually to the terminal and then maintained for 10 seconds.</p>  |
| Resistance to Flexure JIS C 5321:1997 抗弯曲性试验 | 1.No visible mechanical damage. | <p>1.Solder the inductor to the test jig (glass epoxy board)</p> <p>2.Using a leadfree solder. Then apply a force in the direction shown</p> <p>3.Flexure: 2mm.</p> <p>4.Pressurizing Speed: 0.5mm/sec.</p> <p>5.Keep time: 30 sec.</p>  |
| Dropping Reference documents: GB/T 2423.7-2018 落下試驗 | <p>1.No case deformation or change in appearance.</p> <p>2.No short and no open.</p> | <p>1.Drop the packaged products from 1m high in 1 angle, 3 ridges and 6surfaces, twice in each direction.</p> |
| Solderability Reference documents: GB/T 2423.28-2005 可焊性试验 | <p>1.No visible mechanical damage.</p> <p>2.Wetting shall exceed 75% coverage for</p> <p>3.Terminals must have 95% minimum solder coverage</p> | <p>1.Solder temperture: $240 \pm 2^\circ\text{C}$</p> <p>2.Duration: 3 sec.</p> <p>3. Solder: Sn/3.0Ag/0.5Cu.</p> <p>4. Flux: 25% Resin and 75% ethanol in weight</p> |
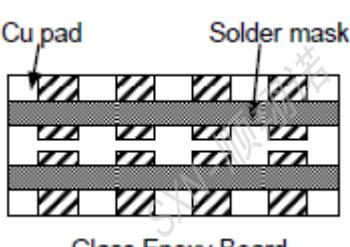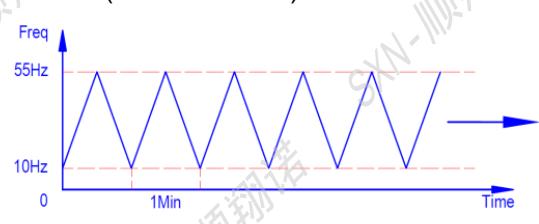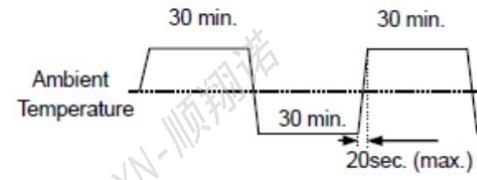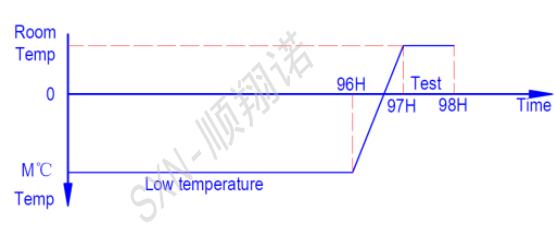
| Items | Requirements | Test Methods and Remarks |
|--|---|---|
| Vibration Reference documents: GB/T 2423.10-2019 振动試驗 | <p>1.No visible mechanical damage. 2. Inductance change: Within $\pm 10\%$. 3.Q factor change: Within $\pm 20\%$.</p>  | <p>1.Solder the inductor to the testing jig (glass epoxy board shown in) using leadfree solder.</p> <p>2.The inductor shall be subjected to a simple harmonic motion having total amplitude of 1.5mm, the frequency being varieduniformly between the approximate limits of 10 and 55 Hz.</p> <p>3.The frequency range from 10 to 55 Hz and return to 10 Hz shall be traversed in approximately 1 minute. This motion shall be applied for a period of 2 hours in each 3mutually perpendicular directions(total of 6 hours).</p>  |
| Thermal Shock Reference documents: GB/T 2423.22-2012 Method Na 冷热冲击試驗 | <p>1.No visible mechanical damage. 2. Inductance change: Within $\pm 10\%$.(Mn-Zn: Within $\leq 30\%$) 3.Q factor change: Within $\pm 20\%$.</p> | <p>1.Start at (125°C) for T time, rush to (-40°C) for T time as one cycle, go through 20 cycles.</p> <p>2.Transforming interval: Max. 20 sec.</p> <p>3.Tested cycle: 20 cycles.</p> <p>4.The chip shall be stabilized at normal condition for 1~2 hours</p>  |
| Low temperature Storage Reference documents: GB/T 2423.1-2008 Method Ab 低温储存試驗 | <p>1.No visible mechanical damage. 2. Inductance change: Within $\pm 10\%$.(Mn-Zn: Within $\leq 30\%$) 3.Q factor change: Within $\pm 20\%$.</p> | <p>1.Temperature:$M(-40 \pm 2^{\circ}\text{C})$ 2.Duration: 96 ± 2 hours 3.The chip shall be stabilized at normal condition for 1~2 hours before measuring.</p>  |
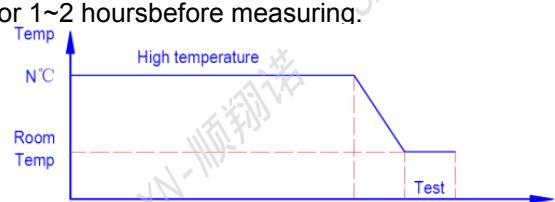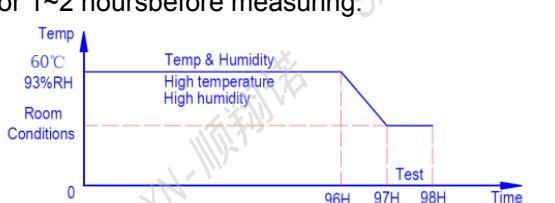
| Items | Requirements | Test Methods and Remarks |
|--|--|--|
| High temperature Storage Reference documents: GB/T 2423.2-2008 Method Bb 高温储存试验 | 1.No visible mechanical damage. 2. Inductance change: Within $\pm 10\%$.(Mn-Zn: Within $\leq 30\%$) 3.Q factor change: Within $\pm 20\%$. | 1.Temperature:N($125 \pm 2^\circ\text{C}$). 2.Duration: 96 ± 2 hours 3.The chip shall be stabilized at normal condition for 1~2 hoursbefore measuring.  |
| Damp Heat (Steady States) Reference documents: GB/T 2423.3-2016 恒定湿热试验 | 1.No visible mechanical damage. 2. Inductance change: Within $\pm 10\%$.(Mn-Zn: Within $\leq 30\%$) 3.Q factor change: Within $\pm 20\%$. | 1.Temperature: $60 \pm 2^\circ\text{C}$ 2.Humidity: 90% to 95% RH. 3.Duration: 96 ± 2 hours. 4.The chip shall be stabilized at normal condition for 1~2 hoursbefore measuring.  |
| Heat endurance of Reflow soldering Reference documents: GJB 360B-2009 回流焊耐热性试验 | 1.No significant defects in appearance. 2. $\Delta L/L \leq 10\%$ (Mn-Zn: $\Delta L/L \leq 30\%$) 3. $\Delta Q/Q \leq 30\%$ (SMD series only) 4. $\Delta DCR/DCR \leq 10\%$ | 1.Refer to the above reflow curve and go through the reflow for twice. 2.The peak temperature : $260+0/-5^\circ\text{C}$ |
| Resistance to solvent test Reference documents: IEC 68-2-45:1993 耐溶剂性试验 | No case deformation or change in appearance or obliteration of marking | To dip parts into IPA solvent for 5 ± 0.5 Min,then drying them at room temp for 5Min,at last ,to brushing making 10 times. |
| Overload test Reference documents: JIS C5311-6.13 过负荷试验 | 1.During the test no smoke, no peculiar, smell, no fire 2.The characteristic is normal after test | Apply twice as rated current for 5 minutes. |
| voltage resistance test Reference documents: MIL-STD-202G Method 301 绝缘耐压测试 | 1.During the test no breakdown 2.The characteristic is normal after test | 1. For parts with two coils 2. DC1000V, Current: 1mA, Time: 1Min. 3. Refer to catalogue of specific products |

◆ 推荐回流焊温度曲线

Recommended reflow soldering curve:

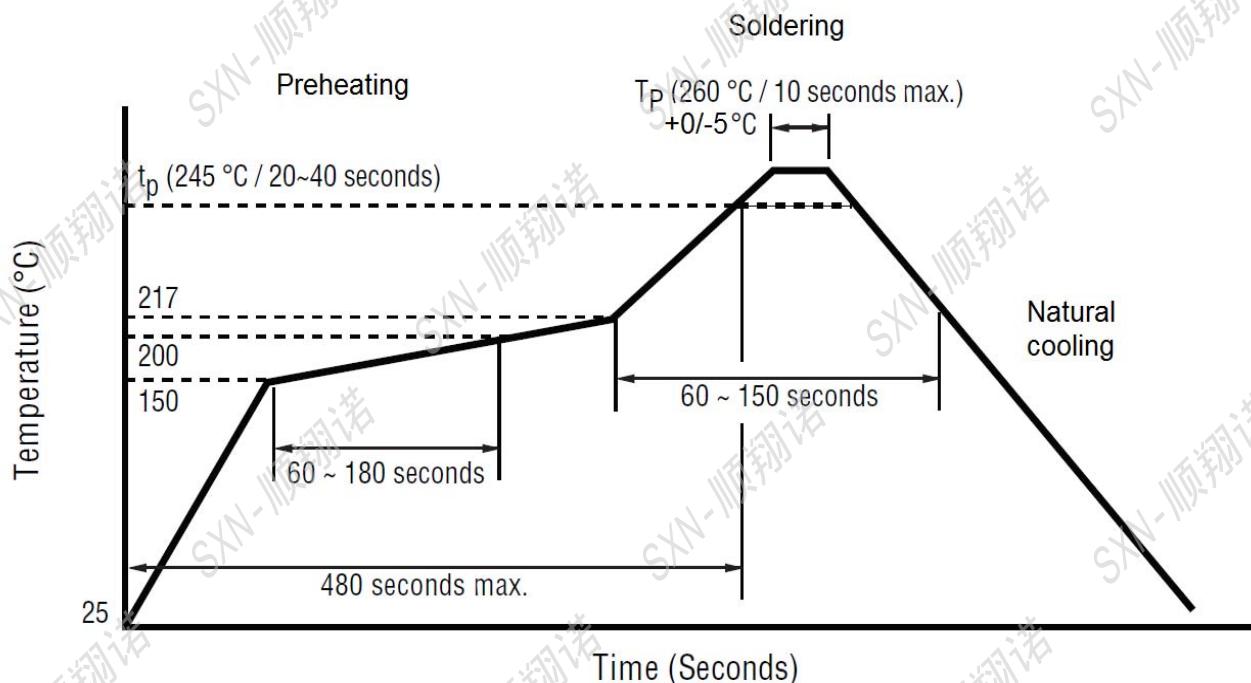

The recommended reflow conditions as above graph, is set according to our soldering equipment. DUE to various manufactures may have different reflow soldering equipment, products, process conditions, set methods. And so on, when setting the reflow conditions, Please adjust and confirm according to users' environment/equipment.

使用注意事项

REMINDERS FOR USING THESE PRODUCTS



- 保存时间为12 个月以内，保存条件（温度5~40°C以下、湿度35 ~ 66%RH 以下），需充分注意。
若超过保存时间，端子电极的可焊性将可能老化。
The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5~40°C, humidity: 35 to 66% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- 请勿在气体腐蚀环境（盐、酸、碱等）下使用和保存。
Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- 手上的油脂会导致可焊性降低，应避免用手直接接触端子。
Don't touch electrodes directly with bare hands as oil secretions may inhibit soldering. Always ensure optimum conditions for soldering.
- 请小心轻拿轻放,避免由于产品的跌落或取出不当而导致的损坏。
Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.
- 端子过度弯曲会导致断线,请不要过度弯曲端子。
Don't bend the terminals with excessive stress in case of any wire fracture.
- 不要清洗产品，如需要清洗时请联系我司。
Don't rinse coils by yourself and please contact SXN if necessary.
- 请勿将本产品靠近磁铁或带有磁力的物体
Don't expose the products to magnets or magnetic fields
- 在实施焊接前，请务必进行预热。预热温度与焊接温度及芯片温度的温度差要在150°C 以内。
Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- 安装后的焊接修正应在规格书规定的条件范围内。若加热过度可能导致短路、性能降低、寿命减少。
Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- 装置会因通电而自我发热（温度上升），因此在热设计方面需留有充分余地。
Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- 非磁屏蔽型在基板设计时需注意配置线圈，受到电磁干扰可能会导致误动作。
Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference.