


ESD



TVS



TSS



MOV



GDT



PLED

TL431BMFDT-MS

Product specification

General description

The TL431BMFDT-MS is a three-terminal adjustable shunt regulator with guaranteed thermal stability over a full operation range. It features sharp turn-on characteristics, low temperature coefficient and low output impedance, which make it ideal substitute for Zener diode in applications such as switching power supply, charger and other adjustable regulators.

The output voltage of TL431BMFDT-MS can be set to any value between V_{REF}(2.5V) and the corresponding maximum cathode voltage (36V).

The TL431BMFDT-MS precision reference is offered in two voltage tolerance: 0.5%.

Features and benefits

- Programmable Precise Output Voltage from 2.5V to 36V
- High Stability under Capacitive Load
- Low Temperature Deviation: 4.5mV Typical
- Low Equivalent Full-range Temperature Coefficient with 20PPM/°C Typical
- Sink Current Capacity from 1mA to 100mA
- Low Output Noise
- Wide Operating Range of -40 to +125°C
- Lead-Free Packages
- Lead-Free Packages, Available in "Green" Molding Compound


Applications

- Charger
- Voltage Adapter
- Switching Power Supply
- Graphic Card
- Precision Voltage Reference


Reference News

SOT-23	Pin Assignments	Marking
	<p>ANODE 3</p> <p>1 REF 2 CATHODE</p>	GA1


Typical Applications Circuit

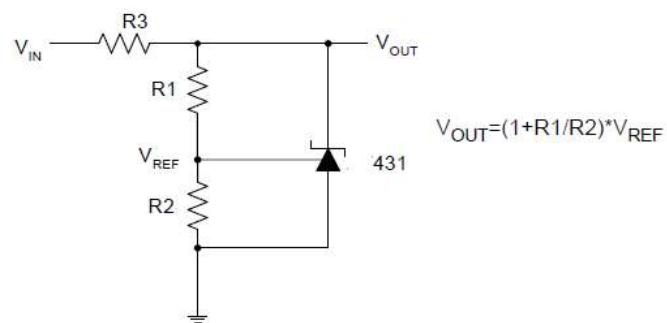


Shunt Regulator

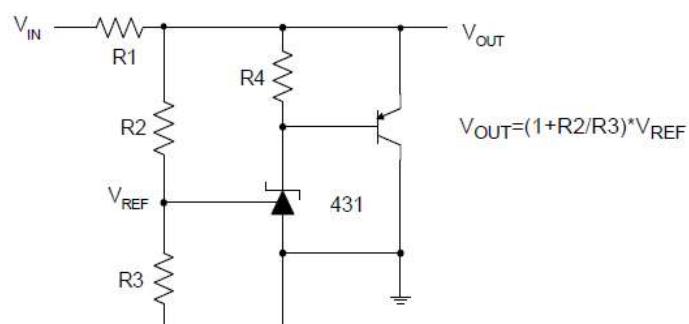


High Current Shunt Regulator

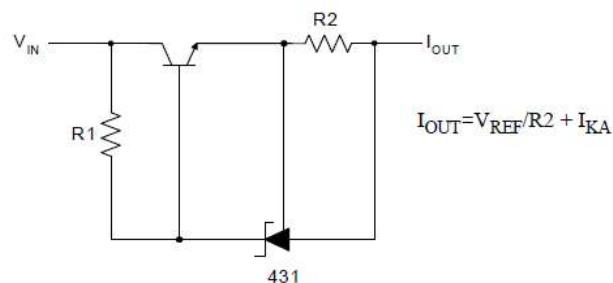

Current Source or Current Limit

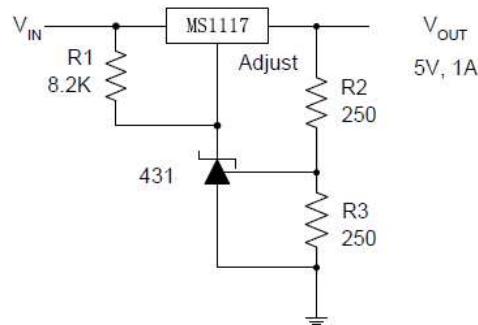


Precision 5V 1A Regulator

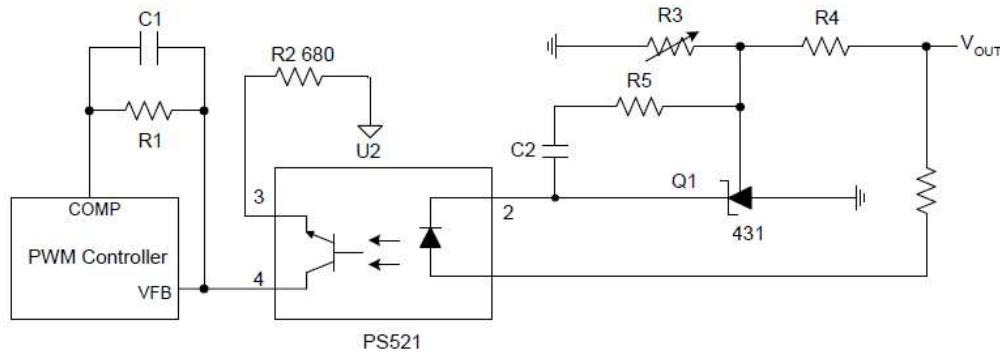

PWM Converter with Reference

Functional Block Diagram

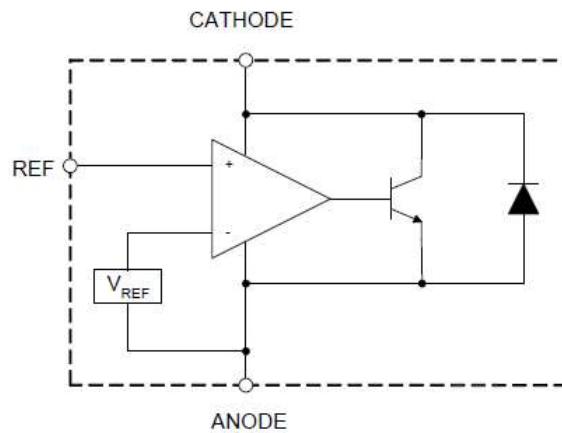

Absolute Maximum Ratings (Note 5)

Symbol	Parameter	Rating	Unit
V _{KA}	Cathode Voltage	40	V
I _{KA}	Cathode Current Range (Continuous)	-100 to 150	mA
I _{REF}	Reference Input Current Range	10	mA
P _D	Power Dissipation	770	mW
T _J	Junction Temperature	+125	°C
T _{STG}	Storage Temperature Range	-65 to +150	°C
ESD	ESD (Human Body Model)	2000	V

Note: 5. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.


Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{KA}	Cathode Voltage	V _{REF}	36	V
I _{KA}	Cathode Current	1.0	100	mA
T _A	Operating Ambient Temperature Range	-40	+125	°C


Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Symbol	Test Circuit	Parameter	Conditions	Min	Typ	Max	Unit
V _{REF}	4	Reference Voltage	0.5% V _{KA} = V _{REF} , I _{KA} = 10mA	2.4875	2.500	2.5125	V
ΔV_{REF}	4	Deviation of Reference Voltage Over Full Temperature Range	V _{KA} = V _{REF} I _{KA} = 10mA	0 to +70°C	—	4.5	8
				-40 to +85°C	—	4.5	10
				-40 to +125°C	—	4.5	16
$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	5	Ratio of Change in Reference Voltage to the Change in Cathode Voltage	I _{KA} = 10mA	$\Delta V_{KA} = 10V$ to V _{REF}	—	-1.0	-2.7
				$\Delta V_{KA} = 36V$ to 10V	—	-0.5	-2.0
I _{REF}	5	Reference Current	I _{KA} = 10mA, R ₁ = 10KΩ, R ₂ = ∞	—	0.7	4	μA
ΔI_{REF}	5	Deviation of Reference Current Over Full Temperature Range	I _{KA} = 10mA, R ₁ = 10KΩ R ₂ = ∞ , T _A = -40 to +125°C	—	0.4	1.2	μA
I _{KA} (Min)	4	Minimum Cathode Current for Regulation	V _{KA} = V _{REF}	—	0.4	1.0	mA
I _{KA} (Off)	6	Off-state Cathode Current	V _{KA} = 36V, V _{REF} = 0	—	0.05	1.0	μA
Z _{KA}	4	Dynamic Impedance	V _{KA} = V _{REF} , I _{KA} = 1 to 100mA, f \leq 1.0KHz	—	0.15	0.5	Ω
θ_{JC}	—	Thermal Resistance	SOT23	—	135.48	—	°C/W


Electrical Characteristics (Cont.)



Test Circuit 4 for $V_{KA} = V_{REF}$

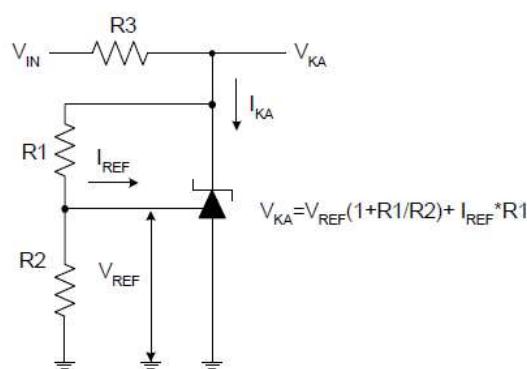


Test Circuit 5 for $V_{KA} > V_{REF}$

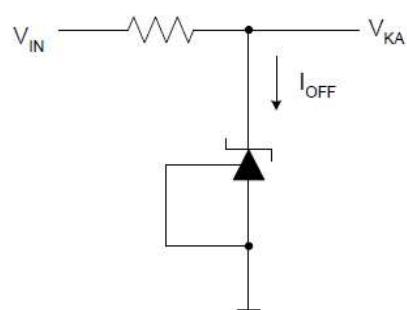


Test Circuit 6 for I_{OFF}

Performance Characteristics


Reference Voltage vs. Ambient Temperature

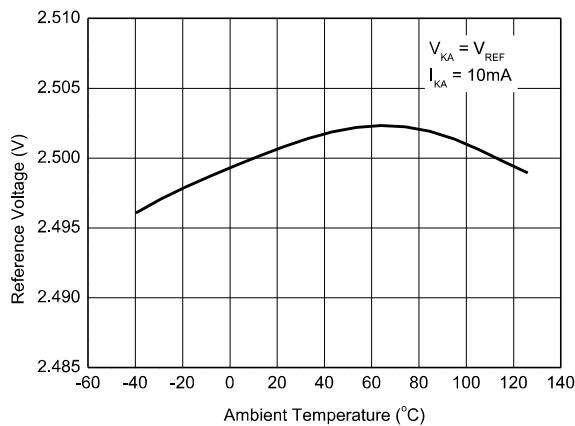


Reference Current vs. Ambient Temperature

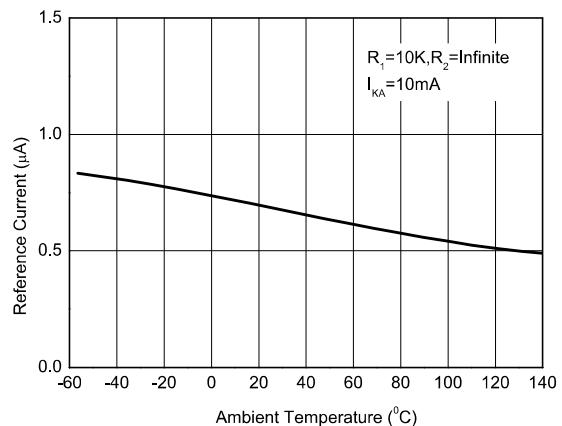


Cathode Current vs. Cathode Voltage

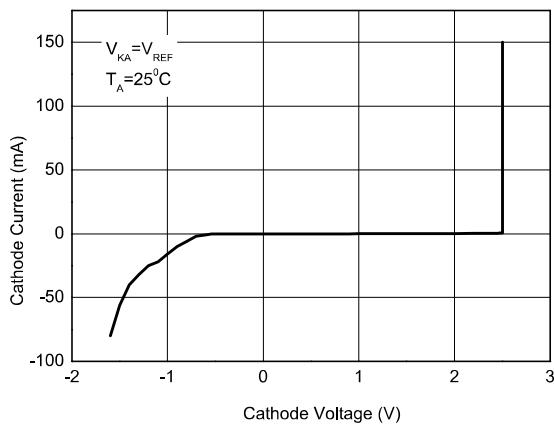


Cathode Current vs. Cathode Voltage

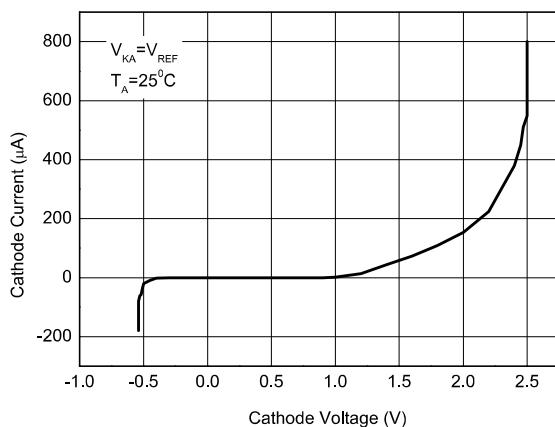

Off-State Cathode Current vs. Ambient Temperature


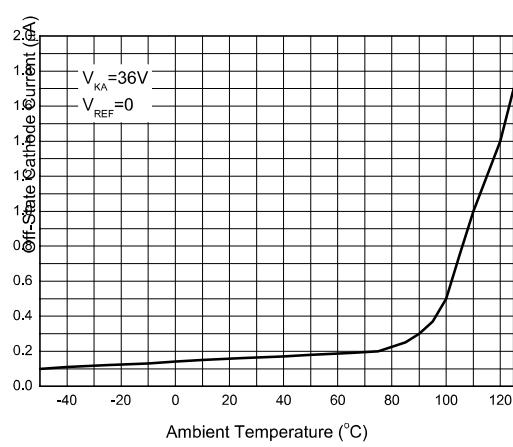


Ratio of Delta Reference Voltage to the Ratio of Delta Cathode Voltage


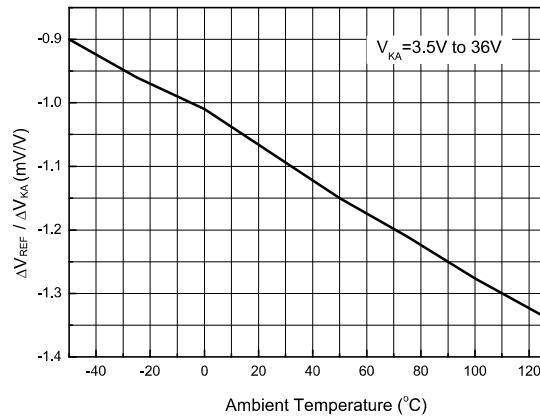


Performance Characteristics (Cont.)



Small Signal Voltage Gain vs. Frequency

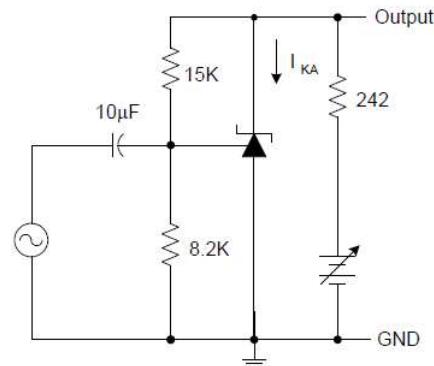
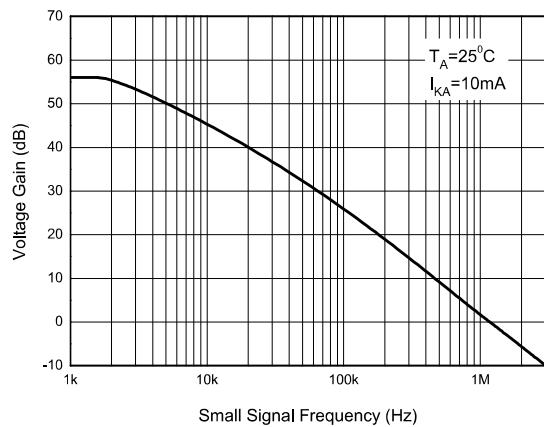


Reference Impedance vs. Frequency

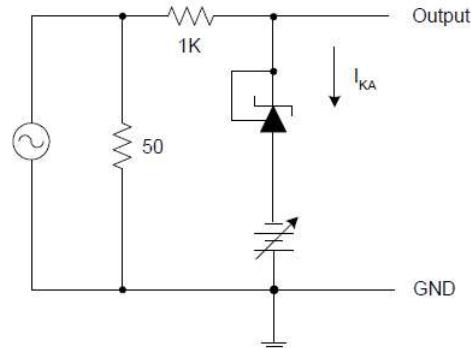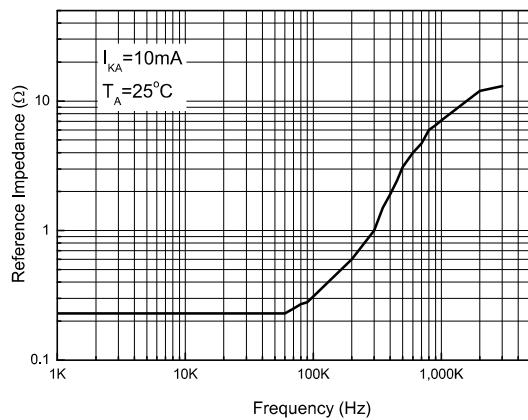


Stability Boundary Conditions vs. Load Capacitance

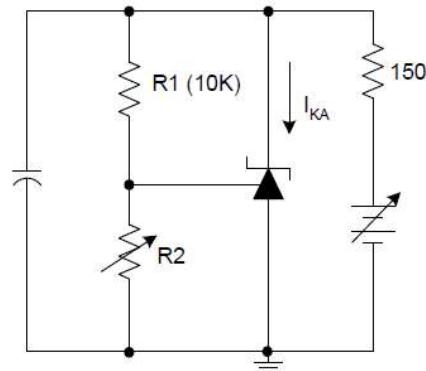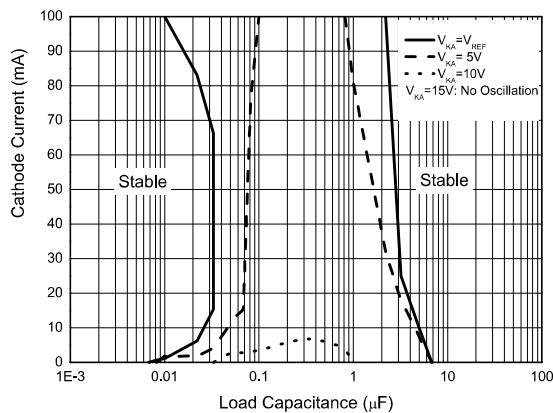

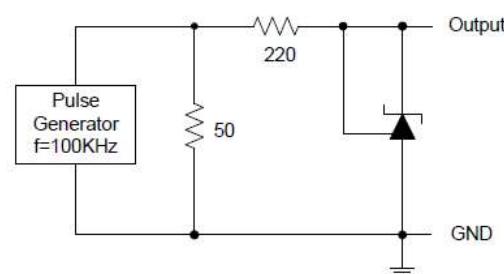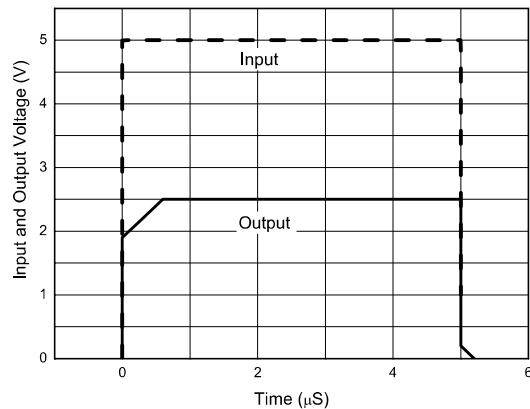Performance Characteristics (Cont.)**Pulse Response of Input and Output Voltage**

SOT-23 PACKAGE INFORMATION

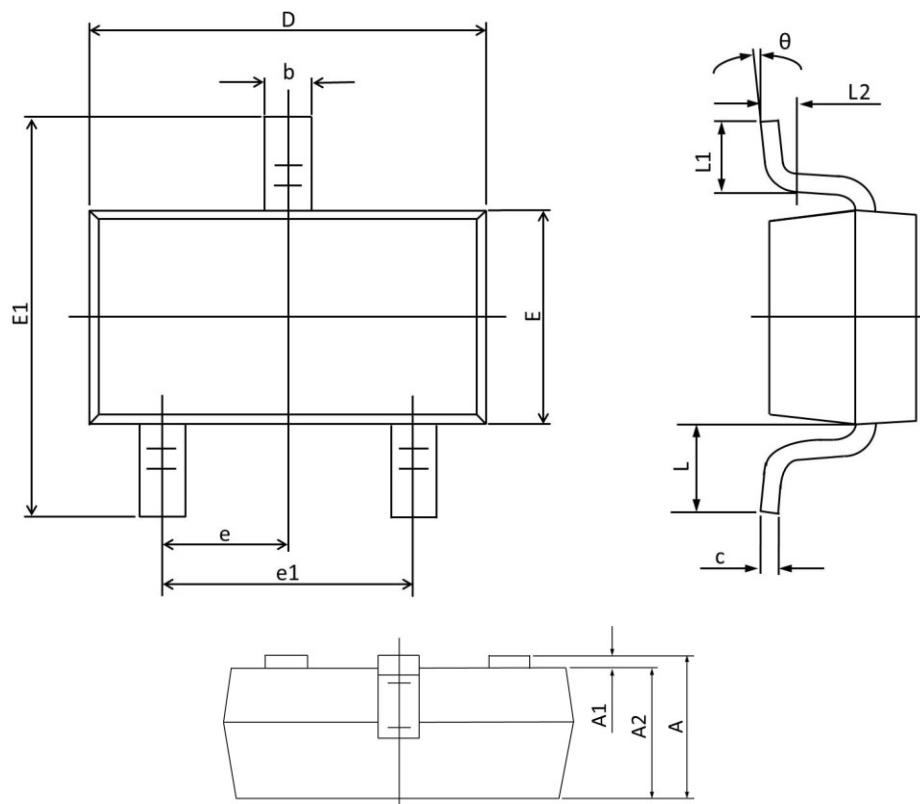

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Max	Min	Max	Min
A	1.150	0.900	0.045	0.035
A1	0.100	0.000	0.004	0.000
A2	1.050	0.900	0.041	0.035
b	0.500	0.300	0.020	0.012
c	0.150	0.080	0.006	0.003
D	3.000	2.800	0.118	0.110
E	1.400	1.200	0.055	0.047
E1	2.550	2.250	0.100	0.089
e	0.95 TYP.		0.037 TYP.	
e1	2.000	1.800	0.079	0.071
L	0.55 REF.		0.022 REF.	
L1	0.500	0.300	0.020	0.012
L2	0.25 TYP.		0.01 TYP.	
θ	8°	0°	8°	0°

REEL SPECIFICATION

P/N	PKG	QTY
TL431BMFDT-MS	SOT-23	3000

Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.