

Description

The PESD5V0X1BCSFYL-JSM is an ultra-low capacitance TVS (Transient Voltage Suppressor) designed to protect high speed data interfaces. It has been specifically designed to protect sensitive electronic components which are connected to data and transmission lines from over-stress caused by ESD (Electrostatic Discharge). The PESD5V0X1BCSFYL-JSM may be used to provide ESD protection up to $\pm 15\text{kV}$ (contact discharge) according to IEC61000-4-2, and withstand peak pulse current up to 6.5A (8/20 μs) according to IEC61000-4-5.



Features

- IEC 61000-4-2 Level 4 ESD Protection
 - $\pm 15\text{kV}$ Contact Discharge
 - $\pm 15\text{kV}$ Air Discharge
- 50W Peak pulse Power (8/20 μs)
- Low clamping voltage
- Working voltage: 3.3V
- Low leakage current
- RoHS compliant
- Protecting one bi-directional line
- Low Junction capacitance: 0.14pF Typ.

Applications

- High-speed interfaces
- HDMI and USB 3.2
- Cellular handsets and accessories
- Portable Electronics and Notebooks
- TVs and monitors
- Digital cameras

Absolute Maximum rating


Over operating free-air temperature range (unless otherwise noted)

Parameters	Symbol	Min.	Max.	Unit
Peak pulse power (tp=8/20 μs)@25°C	P_{pk}	-	50	W
Peak pulse current (tp=8/20 μs)@25°C	I_{PP}		6.5	A
ESD (IEC61000-4-2 air discharge) @25°C	V_{ESD}	-	± 15	kV
ESD (IEC61000-4-2 contact discharge) @25°C	V_{ESD}	-	± 15	kV
Junction temperature	T_J	-	150	°C
Operating temperature	T_{OP}	-50	125	°C
Storage temperature	T_{STG}	-55	150	°C
Lead temperature	T_L	-	260	°C






Electrical Characteristics At $TA = 25^\circ C$ unless otherwise noted


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Reverse Stand-off Voltage	V_{RWM}			3.3	5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T = 1\text{mA}$	6.0	8.1		V
Reverse Leakage Current	I_R	$V_{RWM} = 3.3\text{V}$		1	100	nA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}; tp = 8/20\mu\text{s}$		2.5		V
Clamping Voltage	V_C	$I_{PP} = 6.5\text{A}; tp = 8/20\mu\text{s}$		5.5		V
Dynamic Resistance	R_{dyn}			0.4		Ω
Junction Capacitance	C_J	$V_R = 0\text{V}; f = 1\text{MHz}$		0.14	0.20	pF

Symbol	Parameters
V_{RWM}	Reverse stand-off voltage
I_R	Reverse leakage current
V_{BR}	Reverse breakdown voltage
I_{BR}	Reverse breakdown current
V_{CL}	Clamping voltage
V_{TRIG}	Reverse trigger voltage
I_{TRIG}	Reverse trigger current
V_{HOLD}	Reverse holding voltage
I_{HOLD}	Reverse holding current
I_{PP}	Peak pulse current

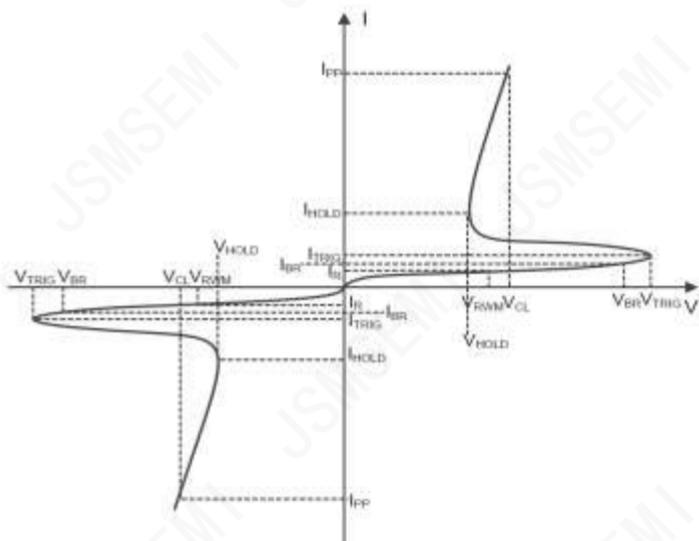


Typical Characteristic

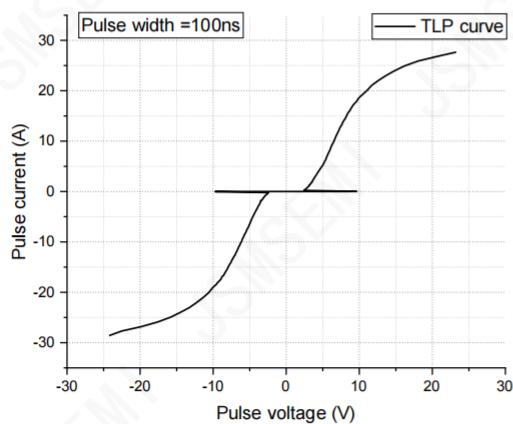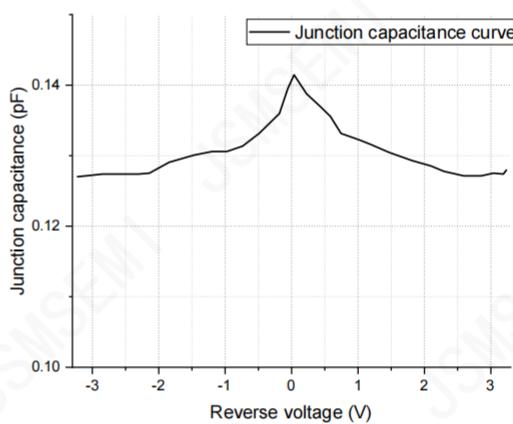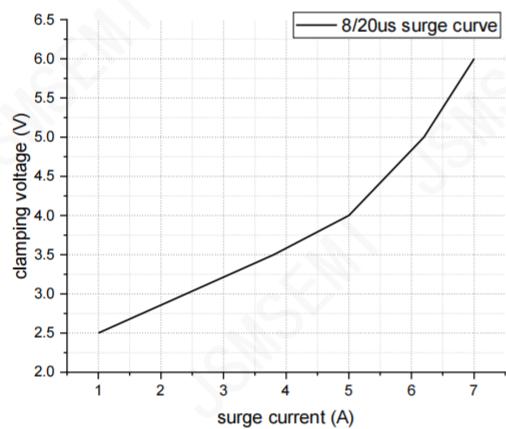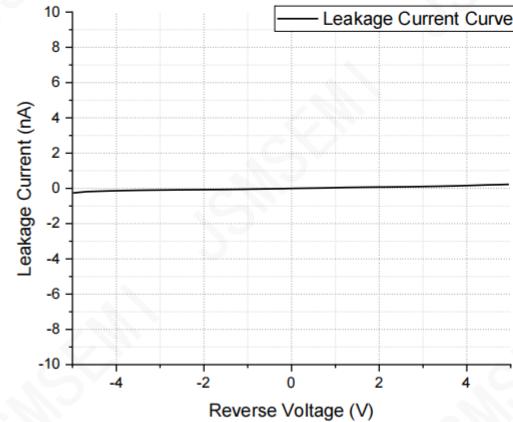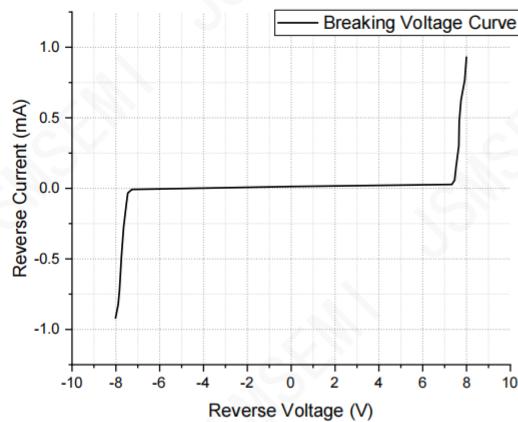

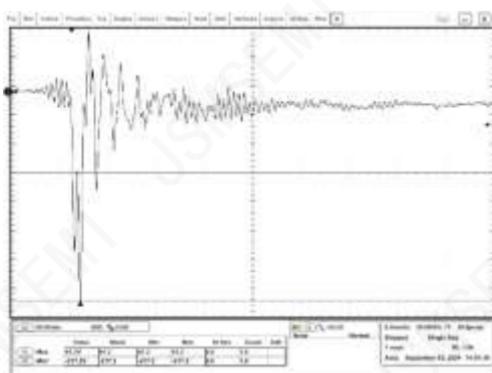

IEC 61000-4-2 waveform (-15kV)


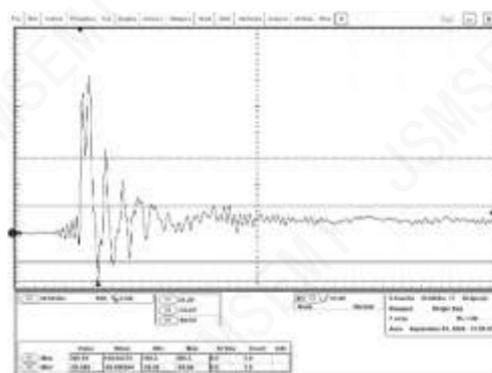


IEC 61000-4-2 waveform (15kV)





20 Gbps USB4 Eye Diagram


Measurement Wave According to IEC Standard

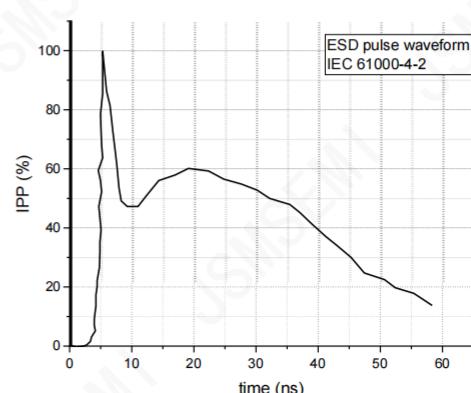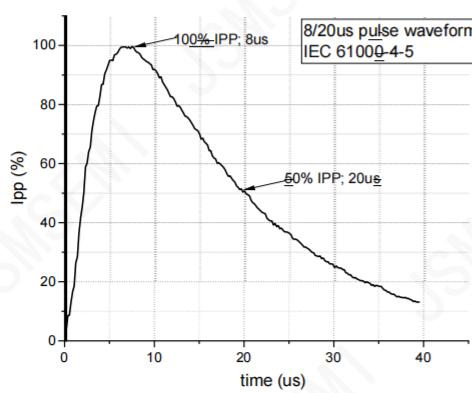

Dimension

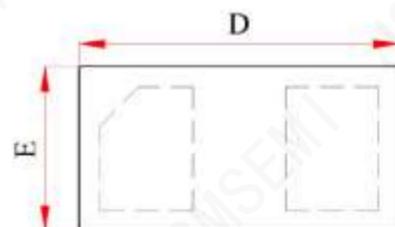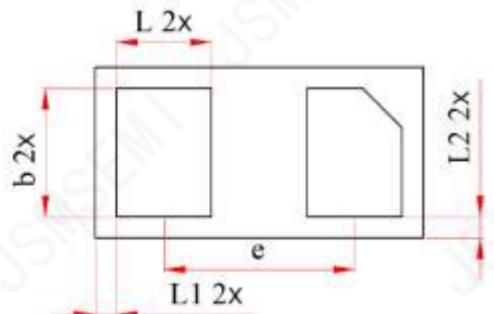


Bottom View

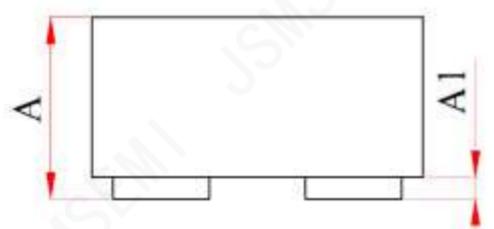

Side View

Symbol	Dimension In Millimeters			Dimension In Inches		
	Normal	Min	Max	Normal	Min	Max
A	--	0.280	0.340	--	0.011	0.013
A1	--	--	0.050	--	--	0.002
D	0.620	0.590	0.640	0.024	0.023	0.025
E	0.320	0.290	0.340	0.013	0.011	0.013
b	0.240	0.215	0.265	0.009	0.008	0.010
L	0.180	0.155	0.205	0.007	0.006	0.008
L1	0.040 REF			0.002 REF		
L2	0.040 REF			0.002 REF		
e	0.360 BSC			0.014 BSC		

Recommended Soldering Footprint

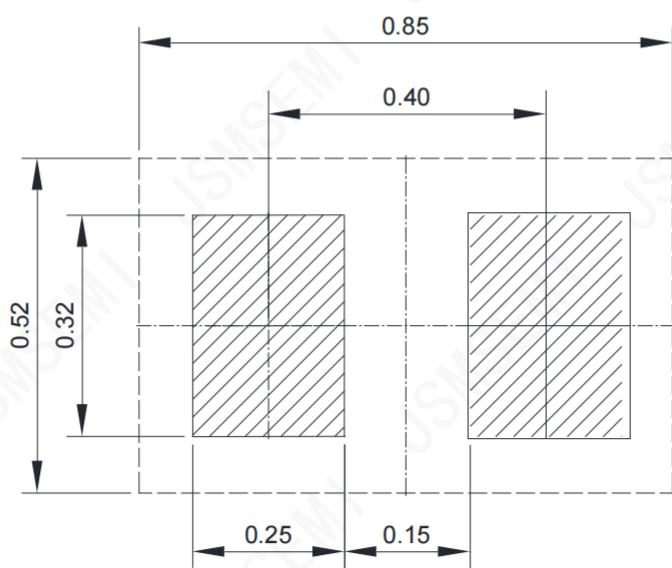

DIMENSIONS: MILLIMETERS

Revision History

Rev.	Change	Date
V1.0	Initial version	6/27/2021

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER'S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements different from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or service. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com