


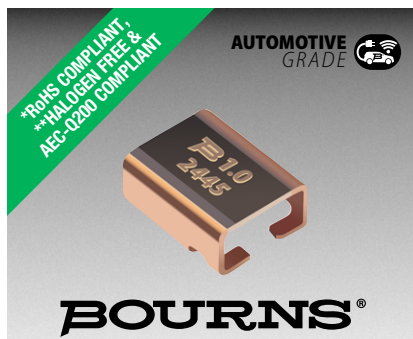

Features

- EB welded metal strip
- High power up to 5 W
- Excellent long term stability
- Four terminals for high accuracy
- RoHS compliant* and halogen free**
- AEC-Q200 compliant

Applications

- Current sensing
- Voltage division
- Battery management systems
- Power modules
- Frequency converters
- Industrial

Model CSS4C-1216 Current Sense Resistor

Specifications

Characteristic	Model CSS4C-		
	1216T-L300	1216T-L500	1216C-1L00
Power Rating @ 100 °C	5 W	5 W	3 W
Resistance Range	0.3 mΩ	0.5 mΩ	1 mΩ
TCR (20~60 °C)	±100 PPM/°C	±50 PPM/°C	±50 PPM/°C
Tolerance	±1 % / ±5 %		
Inductance	<2 nH		
Max. Working Voltage	$V = \sqrt{P \times R}$		

Additional Information

Click these links for more information:



Environmental Characteristics

Operating Temperature
..... -65 °C to +170 °C

Storage Conditions
Temperature +5 °C to +35 °C
Humidity 40 % to 75 %
Moisture Sensitivity Level..... 1

Performance Characteristics

Test	Conditions	Test Condition	
		Reference	Limit
Short Time Overload	5X rated power for 5 sec.	IEC 60115-1 4.13	$\Delta R < \pm 0.5 \%$
Low Temperature Storage	-65 °C for 24 hrs.	IEC 60115-1-4.23.4 JIS-C5201-4.23.4	$\Delta R < \pm 1 \%$
High Temperature Exposure	1000 hours @ +170 °C	AEC-Q200-REV E-Test 3 MIL-STD202 Method 108	$\Delta R < \pm 1 \%$
Temperature Cycling	1000 cycles (-55 °C to +150 °C)	AEC-Q200-REV E-Test 4 JESD22 Method JA-104	$\Delta R < \pm 0.5 \%$
Bias Humidity	+ 85 °C, 85 % RH, 10 % bias, 1000 hours	AEC-Q200-REV E-Test 7 MIL-STD-202 Method 103	$\Delta R < \pm 0.5 \%$
Mechanical Shock	100 g for 6 ms, half sine shock pulse	AEC-Q200-REV E-Test 13 MIL-STD-202 Method 213	$\Delta R < \pm 0.2 \%$
Vibration	5 g's for 20 min, 10-2 kHz 12 cycles	AEC-Q200-REV E-Test 14 MIL-STD-202 Method 204	$\Delta R < \pm 0.2 \%$
Operational Life	1000 hours at rated power at +125 °C	AEC-Q200-REV E-Test 8 MIL-STD-202 Method 108	$\Delta R < \pm 1 \%$
Resistance to Soldering Heat	+260 ±5 °C, 10 ±1 second dwell	AEC-Q200-REV E-Test 15 MIL-STD-202 Method 210	$\Delta R < \pm 0.5 \%$
Solderability	235 ±3 °C dipping time: 3 ±0.5 seconds	AEC-Q200-REV E-Test 18 J-STD-002	>95 % tin coverage



CALIFORNIA WARNING: Can expose you to lead, a carcinogen and reproductive toxicant.
See www.P65Warnings.ca.gov

* RoHS Directive 2015/863, Mar 31, 2015 and Annex.

**Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Model CSS4C-1216 Current Sense Resistor


BOURNS®

How To Order


CSS 4C - 1216 T - L500 F

Model _____
 CSS = Current Sense Shunt
 Number of Terminals and Style _____
 4C = 4 terminals
 Package Size _____
 1216 = 1216 in. (3038 mm)
 Material _____
 T = Copper Manganese Tin Alloy
 C = Copper Manganese Alloy
 Resistance Value _____
 "L" represents decimal point in mΩ
 (example: L500 = 0.0005 Ω, 1L00 = 0.001Ω)
 Resistance Tolerance _____
 F = ±1 %
 J = ±5 %
 Packaging Type _____
 (blank) = 3,000 pcs. / 13-inch reel


Typical Part Marking

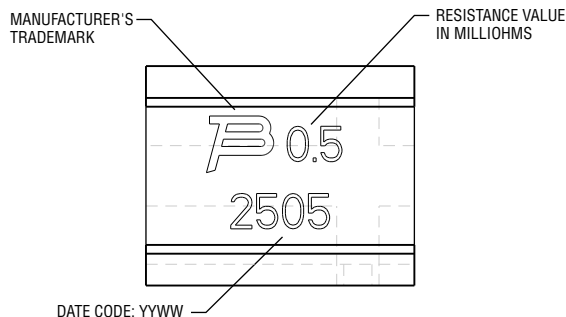

Derating Curve

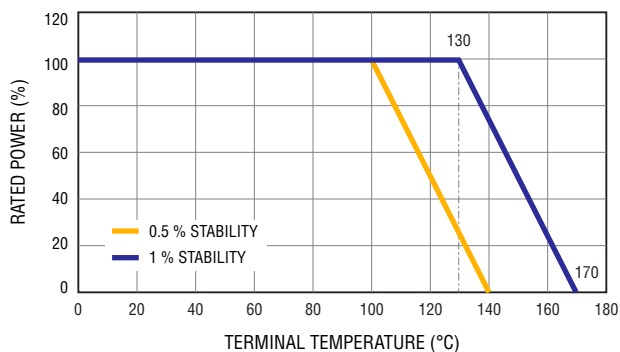


Product Dimensions

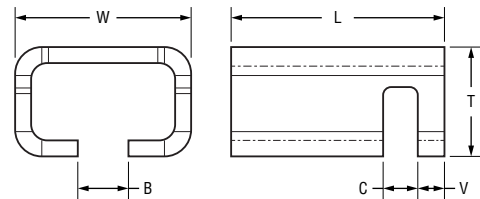

Dim.	Model CSS4C-		
	1216T-L300	1216T-L500	1216C-1L00
L	$\frac{3.80 \pm 0.20}{(.150 \pm .008)}$		
W	$\frac{3.10 \pm 0.20}{(.122 \pm .008)}$		
T	$\frac{2.0 +0/-0.35}{(.079 +0/-0.014)}$	$\frac{1.90 +0/-0.35}{(.075 +0/-0.014)}$	
B	$\frac{0.85 \pm 0.20}{(.033 \pm .008)}$		
V	$\frac{0.50 \pm 0.10}{(.020 \pm .004)}$		
C	$\frac{0.60 \pm 0.15}{(.024 \pm .006)}$		

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

Recommended Layout

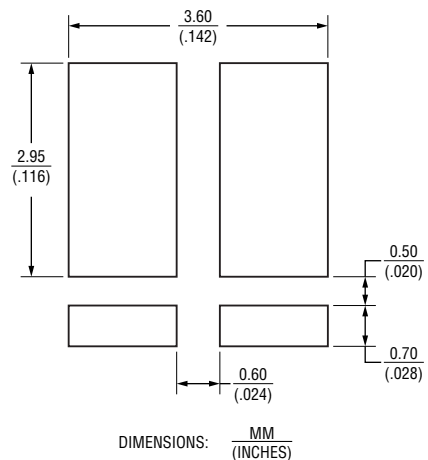


Model CSS4C-1216 Current Sense Resistor


BOURNS®

TCR Curve


COPPER MANGANESE TIN ALLOY

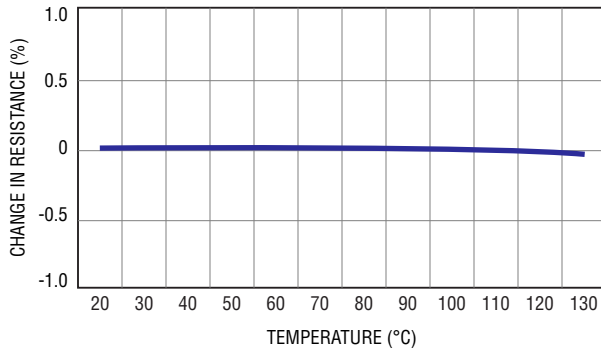

COPPER MANGANESE ALLOY

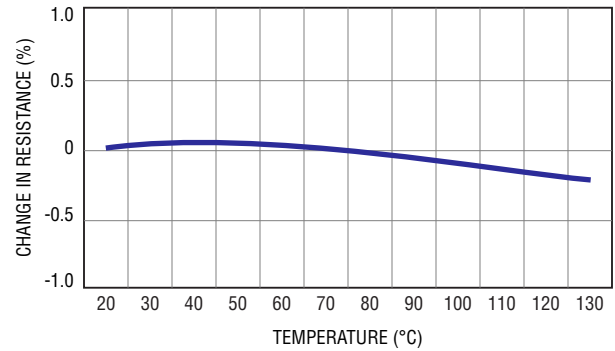

Soldering Profile

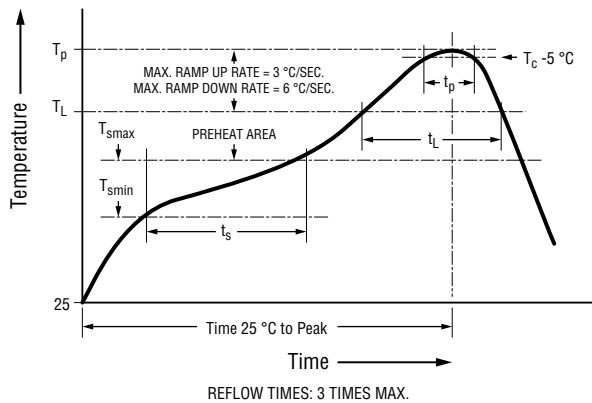

Profile Feature	Pb Free Assembly
Preheat - Temperature Min. (T_{smin}) - Temperature Max. (T_{smax}) - Time(t_s) from T_{smin} to T_{smax}	150 °C 200 °C 60-120 seconds
Ramp-up Rate (T_L to T_p)	3 °C/second max.
Liquidous temperature (T_L) Time (t_L) maintained above T_L	217 °C 60-150 seconds
Peak package body temperature (T_p)	260 °C
Time (t_p) at $T_c - 5^\circ C$ (T_p should be equal to or less than T_c)	30 seconds*
Ramp-Down Rate (T_p to T_L)	6 °C/second max.
Time 25 °C to Peak Temperature	8 minutes max.

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Model CSS4C-1216 Current Sense Resistor

BOURNS®


Packaging Specifications

Components packaged on plastic tape & reel per DIN EN 60286-3.

Standard Reel Size: 13 inches

Tape Width: 12 mm

Quantity: 3,000 pcs. per reel

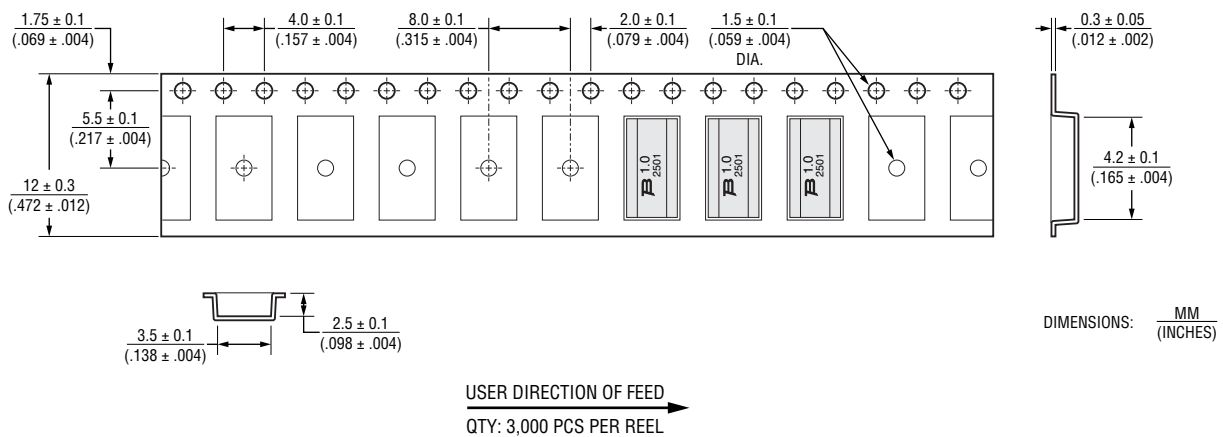

BOURNS®

Americas: Tel: +1 951-781-5500 • Email: americus@bourns.com

Mexico: Tel: +52-614-478-0400 • Email: mexicus@bourns.com

Asia: Tel: +886-2-2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

www.bourns.com

REV. 09/25

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <http://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <http://www.bourns.com/docs/Legal/disclaimer.pdf>