

TDSEMIC

拓電半導體

自主封測 品質把控 售後保障

WEB | WWW.TDSEMIC.COM



電源管理



顯示驅動



二三極管



LDO穩壓器



觸摸芯片



MOS管



運算放大器



存儲芯片



MCU



串口通信

74LVC1G02DBVR-TD

產品規格說明書

74LVC1G02 Single 2-Input
Positive-NOR Gate

1. General Description

1.1 Description

This single2-input positive-NOR gate is designed for 1.65-V to 5.5-V VCC operation.The 74LVC1G02 performs the Boolean function $Y = \overline{A + B}$ or $Y = \overline{A} \bullet \overline{B}$ in positive logic.
The CMOS device has high output drive while maintaining low static power dissipation over a broad VCC operating range.

1.2 Features

- Supports 5V VCC operation
- Inputs accept voltages to 5.5V

- Provides down translation to VCC
- Low power consumption, 10μA max ICC
- ±24mA output drive at 3.3V
- Ioff supports live insertion, partial-power-down mode, and back-drive protection

1.3 Device Information

PART NUMBER	PACKAGE
74LVC1G02	SOT23-5
	SC-70-5
	SOT5X3
	DFN
	DSBGA

2. Connection Diagrams and Pin Description

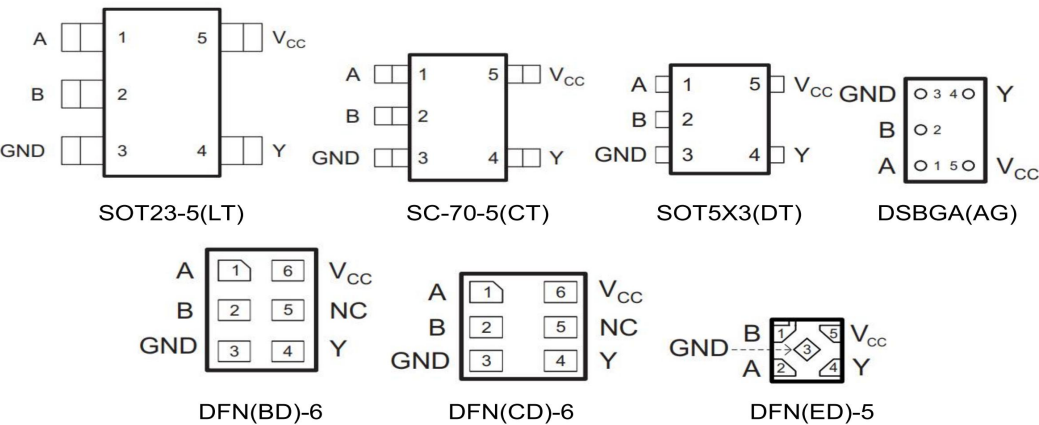


Figure 2.1: Top View

PIN No.			NAME	I/O	FUNCTION
LT/CT/DT/AG	BD/CD	ED			
1	1	2	A	I	Input
2	2	1	B	I	Input
3	3	3	GND		Ground
4	4	4	Y	O	Output
5	6	5	VCC		Supply Voltage
--	5	--	NC		No Connected

3. System Diagram

3.1 Logic Diagram



Figure 3.1: 74LVC1G02 Logic Diagram

3.2 Function Table

Input		Output
A	B	Y
1	X	0
X	1	0
0	0	1

X = don't care, 1≡High State, 0≡Low State

4. ASpecifications

4.1 Absolute Maximum Ratings

Symbol	Parameter	MIN	MAX	Unit
V_{CC}	Supply Voltage	-0.5	6.5	V
V_I	Input Voltage Range	-0.5	6.5	V
V_O	Voltage Range(applied to any output in the high-impedance or power-off state) ⁽¹⁾	-0.5	6.5	V
	Voltage Range(applied to any output in the high or low state)	-0.5	$V_{CC} + 0.5$	V
I_O	Continuous Output Current		±50	mA
T_J	Junction Temperature		125	°C
T_{OP}	Operating Temperature	-40	85	°C

Absolute maximum ratings are those values beyond which the device could be permanently damaged. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under normal operating conditions.

(1) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

4.2 Electrical Characteristics

4.2.1 DC Specifications

($T_a=25^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), All typical values are at $V_{CC}=3.3\text{V}$, unless otherwise specified)

Symbol	Parameter	Test Condition	MIN	TYP	MAX	Unit
V_{IH}	High Level Input Voltage	$V_{CC}=1.65\text{V to }1.95\text{V}$	$0.65V_{CC}$	--	--	V
		$V_{CC}=2.3\text{V to }2.7\text{V}$	1.7	--	--	V
		$V_{CC}=3\text{V to }5.5\text{V}$	$0.7V_{CC}$	--	--	V
V_{IL}	Low Level Input Voltage	$V_{CC}=1.65\text{V to }1.95\text{V}$	--	--	$0.35V_{CC}$	V
		$V_{CC}=2.3\text{V to }2.7\text{V}$	--	--	0.7	V
		$V_{CC}=3\text{V to }3.6\text{V}$	--	--	0.8	V
		$V_{CC}=4.5\text{V to }5.5\text{V}$	--	--	$0.3V_{CC}$	V
I_{OH}	High Level Output Current	$V_{CC}=1.65\text{V}$	--	--	-4	mA
		$V_{CC}=2.3\text{V}$	--	--	-8	mA
		$V_{CC}=3\text{V}$	--	--	-16	mA
			--	--	-24	mA
		$V_{CC}=4.5\text{V}$	--	--	-32	mA
I_{OL}	Low Level Output Current	$V_{CC}=1.65\text{V}$	--	--	4	mA
		$V_{CC}=2.3\text{V}$	--	--	8	mA
		$V_{CC}=3\text{V}$	--	--	16	mA
			--	--	24	mA
		$V_{CC}=4.5\text{V}$	--	--	32	mA

Symbol	Parameter	Test Condition	MIN	TYP	MAX	Unit
V_{OH}	High Level Output Voltage	$V_{CC}=1.65V$ to $5.5V, I_{OH}=-100\mu A$	$V_{CC}-0.1$	--	--	V
		$V_{CC}=1.65V, I_O=-4mA$	--	1.47	--	V
		$V_{CC}=2.3V, I_O=-8mA$	--	2.15	--	V
		$V_{CC}=3V, I_O=-16mA$	--	2.8	--	V
		$V_{CC}=3V, I_O=-24mA$	--	2.7	--	V
		$V_{CC}=4.5V, I_O=-32mA$	--	4.2	--	V
V_{OL}	Low Level Output Voltage	$V_{CC}=1.65V$ to $5.5V, I_{OH}=100\mu A$	--	--	0.1	V
		$V_{CC}=1.65V, I_O=4mA$	--	0.09	--	V
		$V_{CC}=2.3V, I_O=8mA$	--	0.1	--	V
		$V_{CC}=3V, I_O=16mA$	--	0.15	--	V
		$V_{CC}=3V, I_O=24mA$	--	0.25	--	V
		$V_{CC}=4.5V, I_O=32mA$	--	0.25	--	V
I_I	A or B Inputs Leakage Current	$V_{CC}=0$ to $5.5V, V_I=V_{CC}$ or GND	--	0	± 1	μA
I_{off}	Power Off Leakage Current	$V_{CC}=0V, V_I$ or $V_O=5.5V$	--	0	± 10	μA
I_{CC}	Quiescent Supply Current	$V_{CC}=1.65V$ to $5.5V, V_I=V_{CC}$ or GND, $I_O=0$	--	0	10	μA
ΔI_{CC}	Additional Quiescent Supply Current Per Input Pin	$V_{CC}=3V$ to $5.5V$, one input at $V_{CC}-0.6V$, other inputs at V_{CC} or GND	--	--	500	μA

5. Application Information

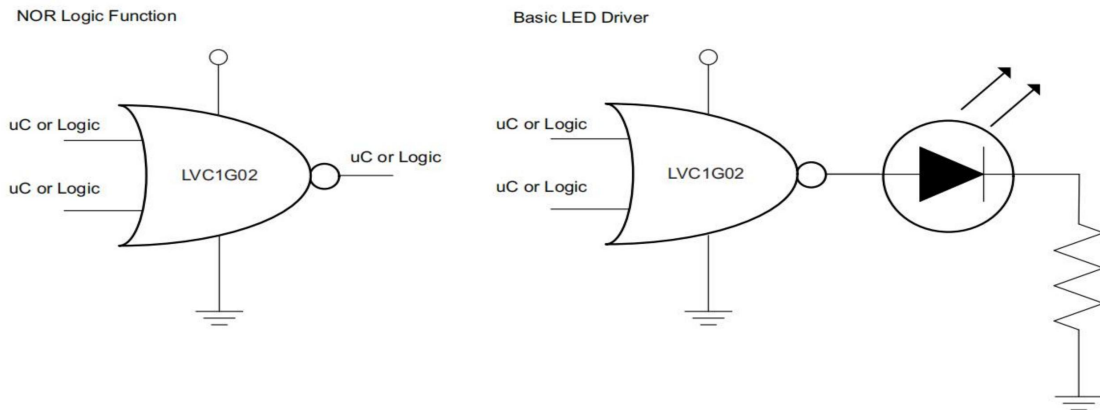



Figure 5.1: Application Schematic

6. Ordering Information

Orderable Device	Package Type	Pins	Packing	Package Qty
74LVC1G02LT05ARCQ	SOT23	5	Tape & Reel	3000
74LVC1G02CT05ARCQ	SC70	5	Tape & Reel	3000
74LVC1G02DT05ARDQ	SOT5x3	5	Tape & Reel	4000
74LVC1G02BD06AREQ	DFN(BD)	6	Tape & Reel	5000
74LVC1G02CD06AREQ	DFN(CD)	6	Tape & Reel	5000
74LVC1G02ED05ARCQ	DFN	5	Tape & Reel	3000
74LVC1G02AG05ARCQ	DSBGA	5	Tape & Reel	3000


7. Package Information

7.1 SOT23-5

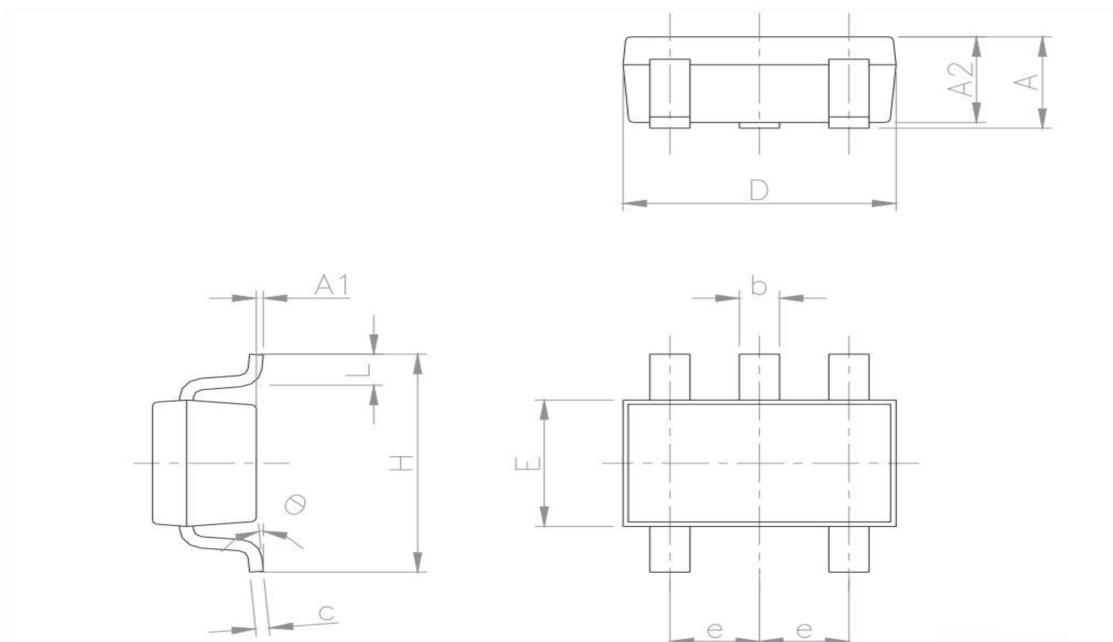


Symbol	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90	-	1.45	0.035	-	0.057
A1	-	-	0.15	-	-	0.006
A2	0.90	-	1.30	0.035	-	0.051
b	0.35	-	0.50	0.014	-	0.020
c	0.09	-	0.20	0.004	-	0.008
D	2.80	-	3.05	0.110	-	0.120
E	1.50	-	1.75	0.059	-	0.069
e	-	0.95	-	-	0.037	-
H	2.60	-	3.00	0.102	-	0.118
L	0.10	-	0.60	0.004	-	0.024
θ	0 degrees	-	10 degrees	-	-	-

7.2 SC-70-5

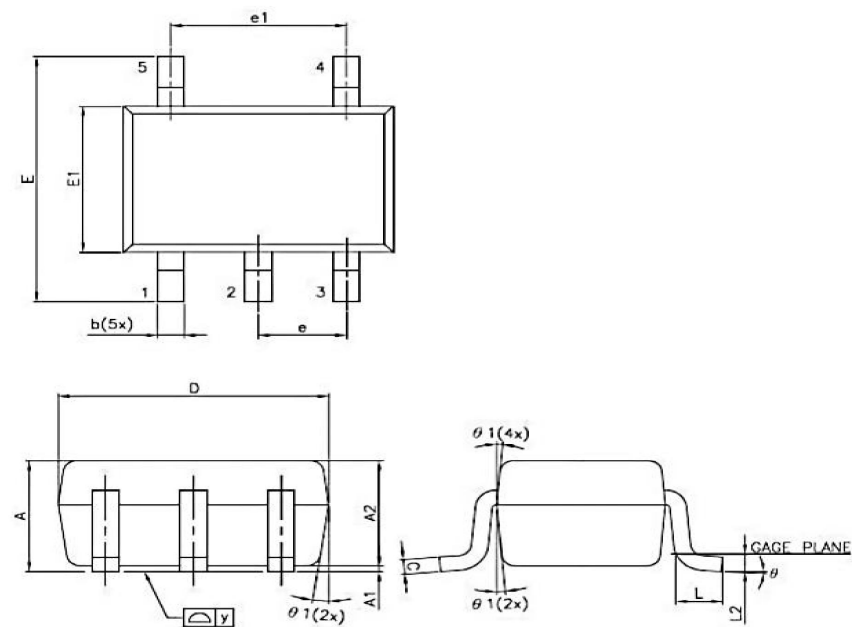


Symbol	Dim in mm		
	MIN	TYP	MAX
A	0.90	1.00	1.10
A1	0.00	0.05	0.10
A2	0.90	0.95	1.00
b	0.15	0.25	0.35
C	0.10	0.12	0.15
D	1.80	2.00	2.20
E	2.15	2.25	2.35
E1	1.15	1.25	1.35
e	0.650TYP.		
e1	1.20	1.30	1.40
L	0.25	0.30	0.40
L2	0.15TYP.		
Y	0.00	0.05	0.10
θ	4°	8°	12°

7.5 DFN(CD)-6

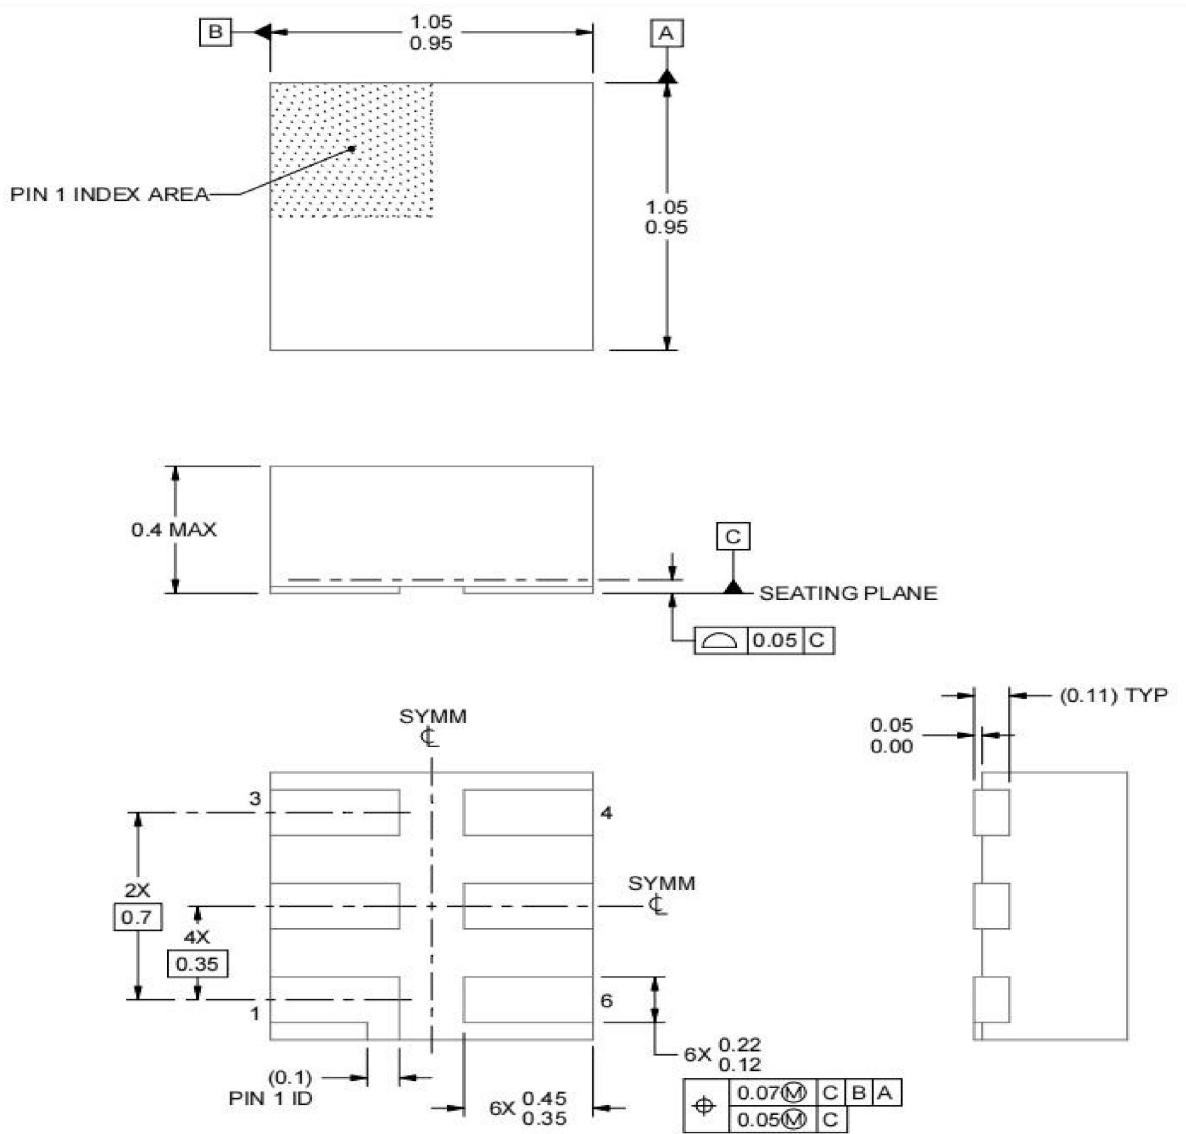

7.6 DFN5

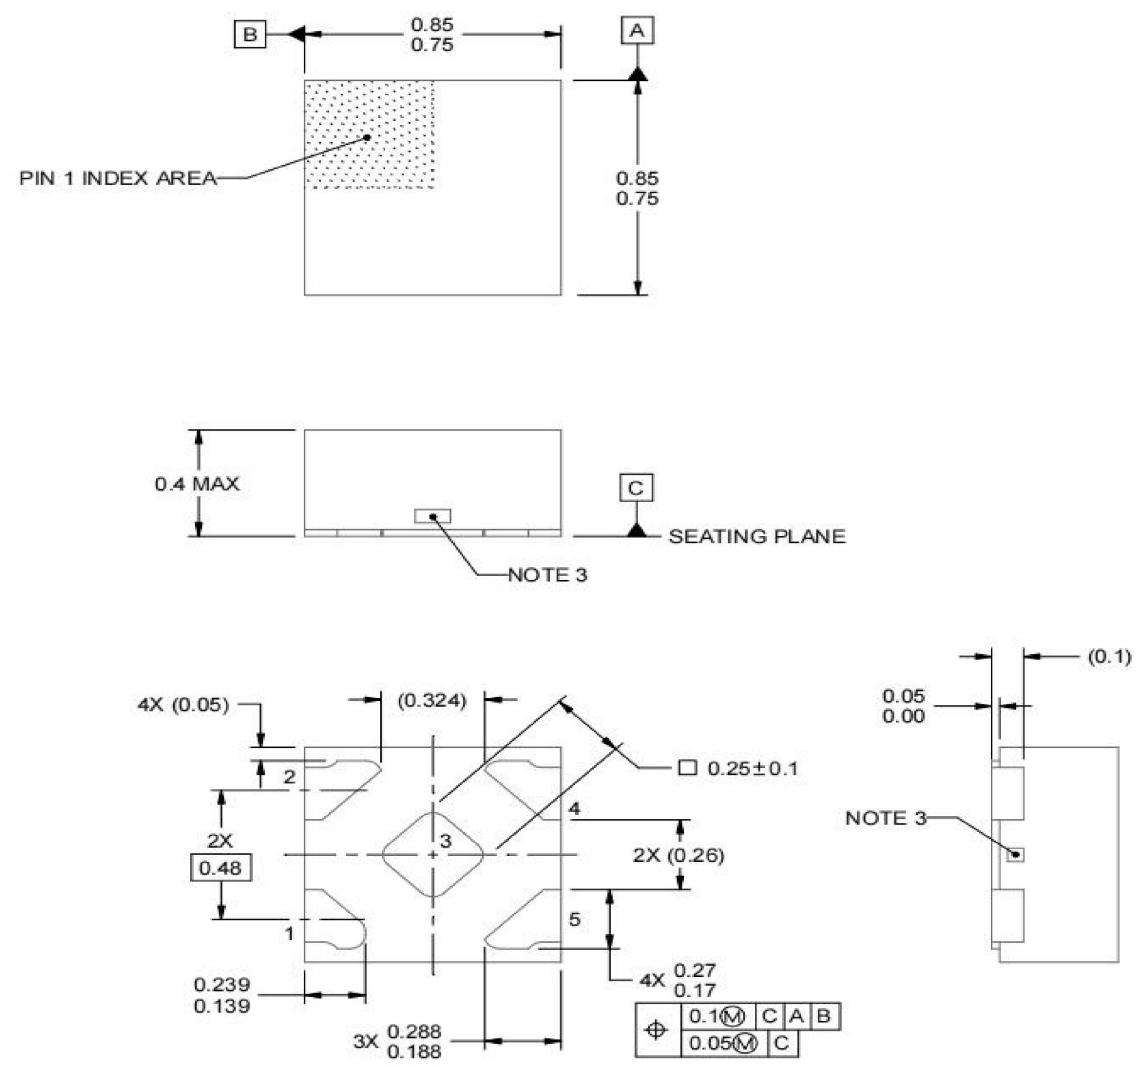

7.7 DSBGA

