



深圳东裕光大电子有限公司
广州市东裕光电科技有限公司

产品规格书 SPECIFICATION

客户名称 CUSTOMER	
产品名称 PRODUCTION	光敏三极管贴片 SMD Phototransistor
产品型号 MODEL	DYWH-PT24061B-E01
版本号 VERSION NO	A1.0

地址(Add): 深圳市光明区凤凰街道光明大道 481 号乐府广场 1B 栋 1609

厂址(Add): 广东省广州市番禺区石基镇海涌路 3 号 10 号厂房 2 楼

电话(Tel): 0755-88367730

传真(Fax): 020-39966833

网址(Net): www.tonyuled.cn www.tonyuled.com



客户确认 CUSTOMER CONFIRMATION	审核 CHECKED BY	编制 PREPARED BY
	周毅兴	陈少龙



产品描述 Descriptions

- DYWH-PT24061B-E01 是一种微型 SMD 封装的光电晶体管，外观为黑色，顶部为球形透镜。
(DYWH-PT24061B-E01 is a phototransistor in miniature SMD package which is molded in a black with spherical top view lens.)
- 该器件是光谱匹配的可见光和红外发射二极管
(The device is Spectrally matched to visible and infrared emitting diode.)

产品特性 Features

- SMD 光电三极管 (SMD Phototransistor)
- 响应时间快 (Fast response time)
- 高灵敏度 (High photo sensitivity)
- 无铅 (Pb free)
- 符合 RoHS 要求 (This product itself will remain within RoHS compliant version)



产品应用 Applications

- 打印机 (Printer)
- 烟感 (Smoke detector)
- 红外应用系统 (Infrared applied system)
- 光电开关 (Switch)

包装方式 Packing Quantity Specification

- 编带 4000 个/卷 (4000PCS/rolls)

一、外形图 Outline dimensions:

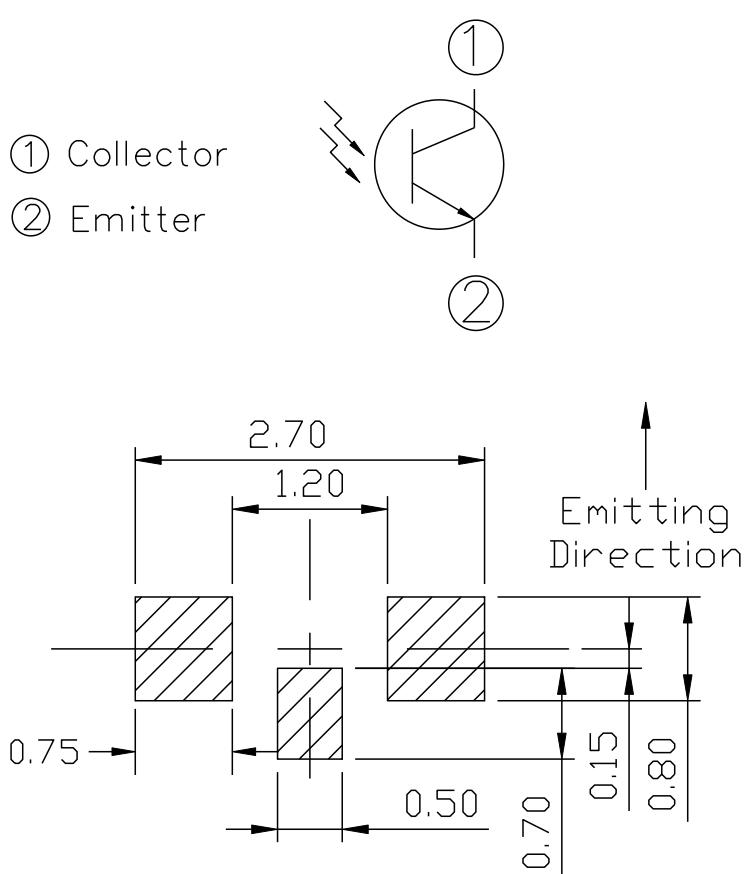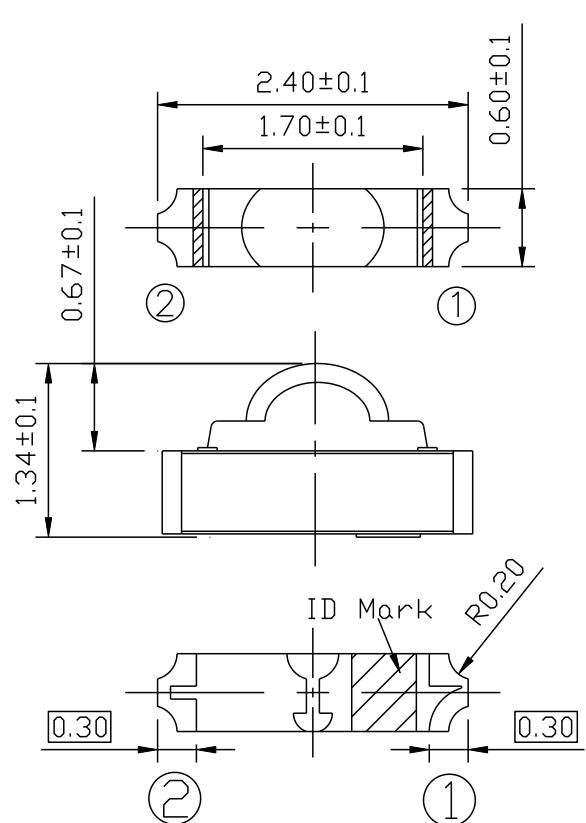

Soldering pattern for side view

Notes: 1. All dimensions are in mm, tolerance is ± 0.1 unless otherwise noted.

单位 Unit	公差 Tolerance	芯片材料 Die material	发光颜色 Emission color	胶体颜色 Lens color
mm	± 0.1 mm	Silicon	—	Black

※备注：承认书之编号和型号可用于查询，客户如有需要，请提供相应的编号和型号。

Remark: P/N & Model in samples approval sheet can be used to inquire, please provide corresponding P/N & model if customer need.

二、光电参数 Electro-Optical Characteristics:

(环境温度 Ambient temperature: 25°C, 环境湿度 Humidity: RH60%)

项目 Item	符号 Symbol	测试条件 Test condition	最小值 Min.	典型值 Type	最大值 Max.	单位 Unit
集-射极崩溃电压 Collector-Emitter Breakdown Voltage	BVceo	Ic=100uA Ee=0mW/cm ²	30	-	-	V
射-集极崩溃电压 Emitter-Collector Breakdown Voltage	BVeco	IE=100uA Ee=0mW/cm ²	4	-	-	
集-射极饱和电压 Collector-Emitter Saturation Voltage	Vce(sat)	Ic=2mA Ee=1mW/cm ²	-	-	0.4	
上升时间 Rise Time	tr	VEC=5v Ic=1mA RL=1000Ω	-	15	-	uS
下降时间 Fall Time	tf		-	15	-	
集极暗电流 Collector Dark Current	ICEO	Ee=0mW/cm ² VCE=10V	-	-	100	nA
集极光电流 On State Collector Current	Ic(on)	Ee=1mW/cm ² VCE=5V	0.30	0.80	-	mA
光谱带宽 Rang of spectral Band width	λ0.1	---	790	-	1100	nm
峰值波长 Peak wavelength	λp	---	-	940	-	nm
视 角 Viewing Angle	2θ1/2	VCE=5V(X-axis)	-	135	-	deg
		VCE=5V(Y-axis)	-	135	-	deg

等级(Rank):

等级代码	符号	最小值	最大值	单位	测试条件
Bin2	IC(ON)	0.30	0.82	mA	VCE=5V Ee=1mW/cm ² λ p=940nm
Bin3		0.70	1.90		



Notes): *正向电压公差范围(Forward voltage tolerance): ±0.1v

*光电流公差范围(Collector Current tolerance): ±10%

*波长公差范围(wavelength tolerance): ±1.0nm




三、典型光电特性曲线图 Typical photoelectricity characteristic curve chart:

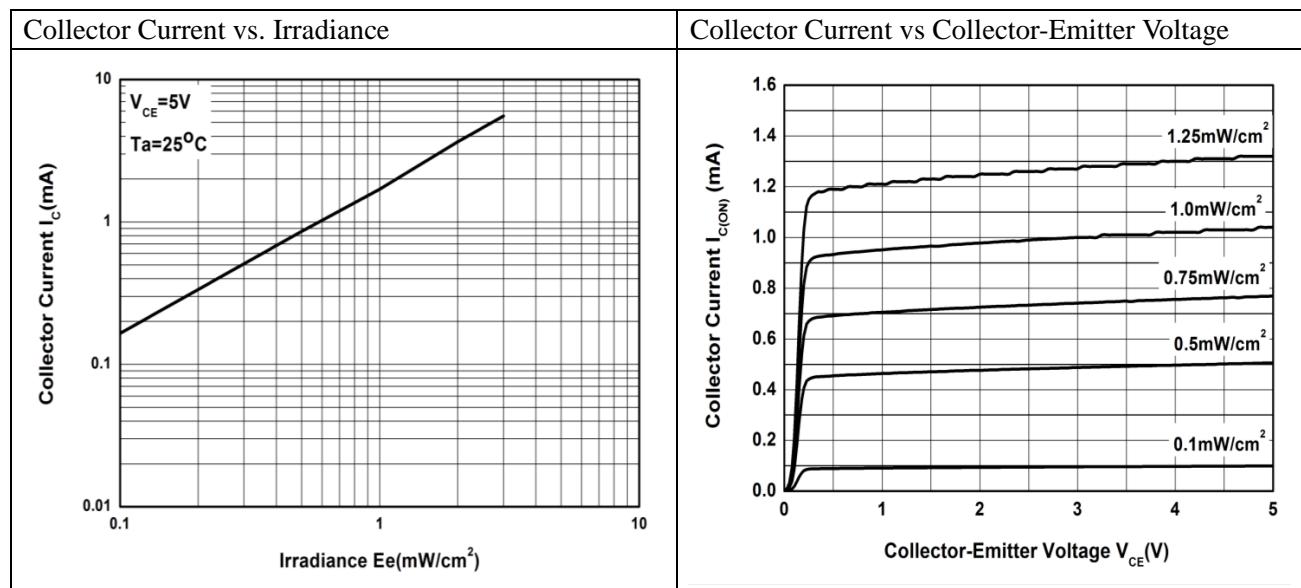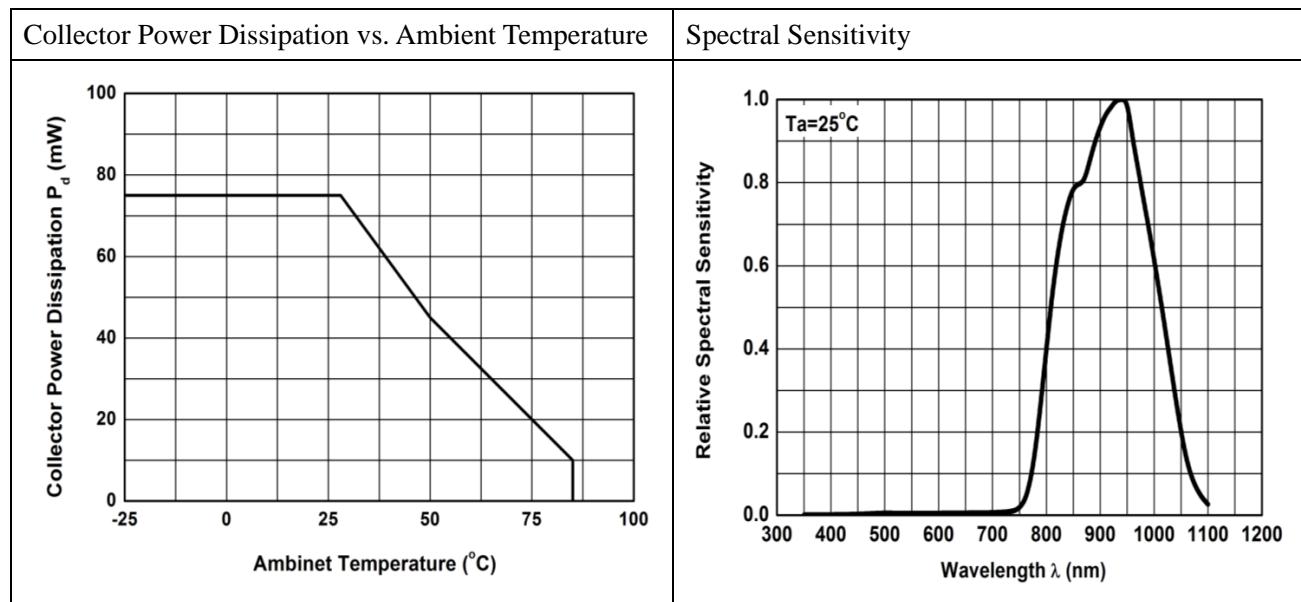


**典型光电特性曲线图 Typical photoelectricity characteristic curve chart:**

Collector Light Current vs. Angular Displacement (X-axis)

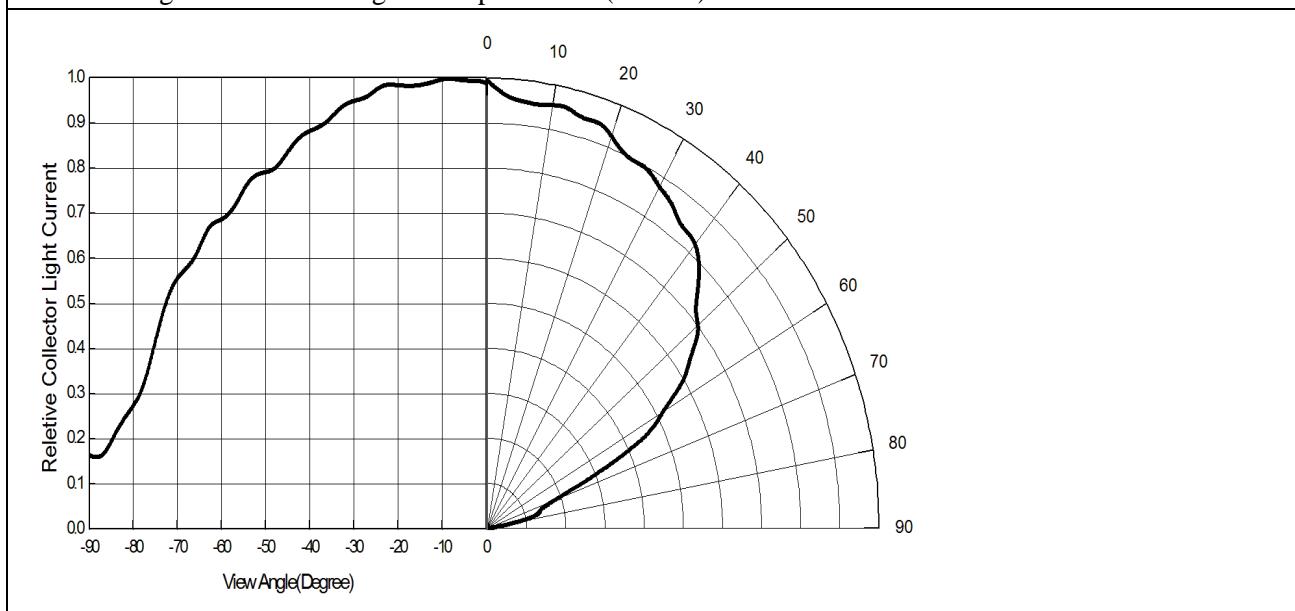

Collector Light Current vs. Angular Displacement (Y-axis)

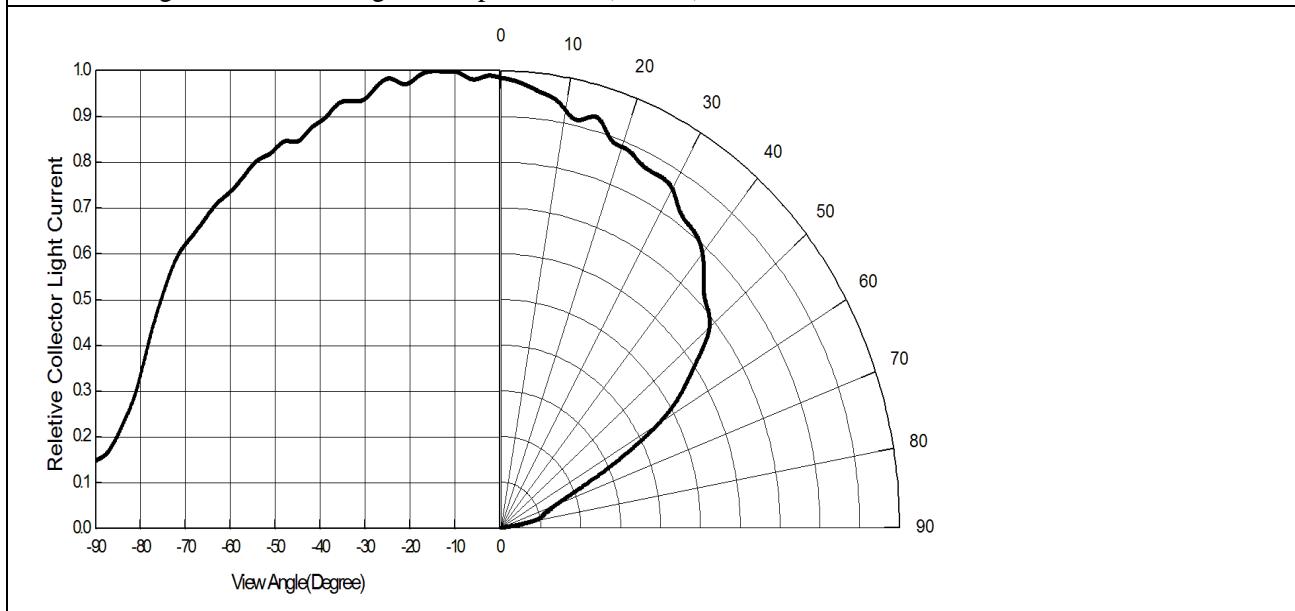



四、极限参数 Absolute Maximum Rating:

(环境温度 Ambient temperature: 25°C, 环境湿度 Humidity: RH60%)

项目 Item	符号 Symbol	数值 Value	单位 Unit	备注 Remark
集电极-发射极电压 Collector-Emitter Voltage	V _{CEO}	30	V	---
发射极-集电极电压 Emitter-Collector-Voltage	V _{ECO}	4	V	---
集电极电流 Collector Currente	I _c	20	mA	---
耗散功率 Power Dissipation	P _d	75	mW	---
工作环境温度 Operation temperature	T _{amb}	-25 至 +85	°C	---
贮藏温度 Storage temperature	T _{stg}	-40 至 +100	°C	---
静电 Electrostatic Discharge (HBM)	ESD	Min.2000	V	
	MM	Min.200	V	
焊接温度*1 Soldering temperature	T _{sol}	260	°C	回流焊 Reflow soldering : 260 °C for 5 sec. 手工焊 Hand soldering: 300°C for 3 sec.
Notes*1: Soldering time \leq 5 seconds.				




五、可靠性实验项目 Reliability Test Project:

描述 Description	项目 Item	测试标准 Test criterion	测试条件 Test condition	测试时间 Test time	数量 Qty.	失效数量 Fail Qty.
寿命测试 Life test	常温寿命测试 Life test (room temperature)	JIS7021:B4	Ta=25°C±5°C, IF=20mA	1000Hrs	22	0
环境测试 Ambience test	高温存储 High temperature store	JIS7021:B10 MIL-STD-202:210A MIL-STD-750:2031	Ta=85°C±5°C	1000Hrs	22	0
	低温存储 Low temperature store	JIS7021:B12	Ta= -35°C±5°C	1000Hrs	22	0
	高温高湿测试 High temperature/ humidity test	JIS7021:B11 MIL-STD-202:103D	Ta=85°C±5°C RH=85%	1000Hrs	22	0
	冷热冲击测试 Cold / Heat strike test	JIS7021:B4 MIL-STD-202:107D MIL-STD-750:1026	30min -10°C±5°C↔100°C±5°C 5min 5min	50Cycles	22	0
	冷热循环测试 Cold and heat cycle test	JIS7021:A3 MIL-STD-202:107D MIL-STD-705:105E	5min 5min 5min -35°C~25°C~85°C~-35°C 30min 5min 30min 5min	50Cycles	22	0

六、包装规格 Packing Specification


包装数量: 4000 pcs/卷 Packing quantity: 4000 PCS/rolls

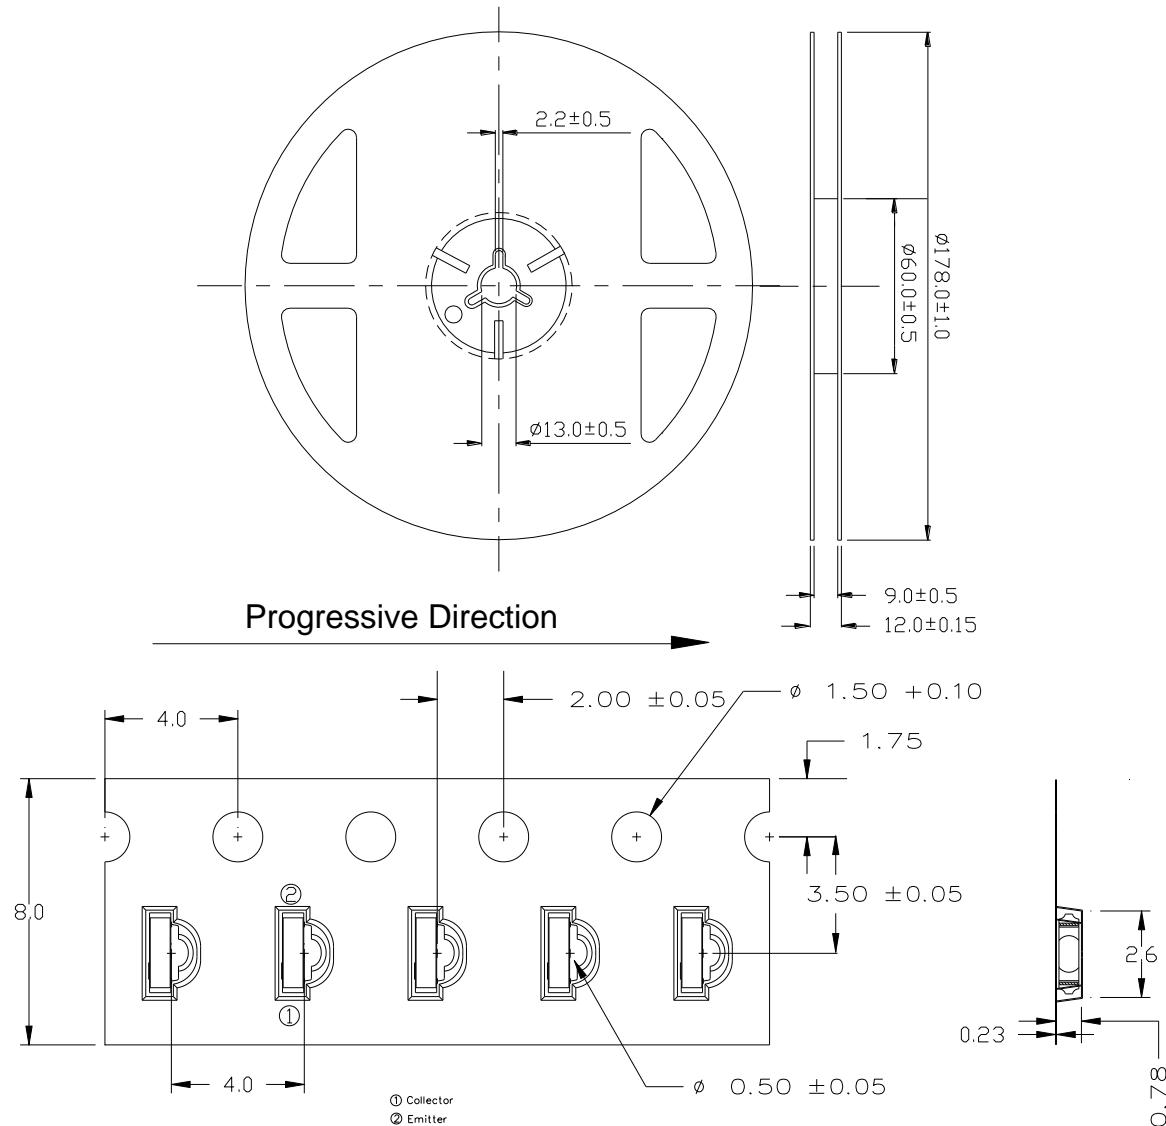

注: 所有尺寸均为毫米, 除非另有说明, 公差为±0.1。


Notes: All dimensions are in mm, tolerance is ±0.1 unless otherwise noted.

标签及标识/ Label Explanation:



标签

The label

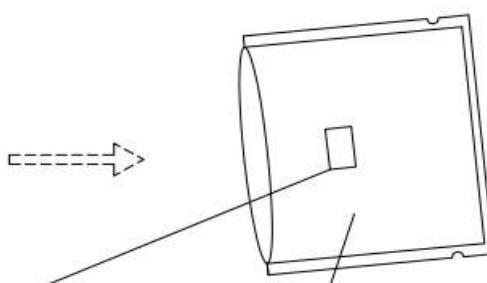

防静电、防潮铝箔袋

Anti-static, moisture-proof aluminum foil bag



七、使用注意事项 Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package, the Phototransistor should be kept at 10 ~30 and 90%RH or less.

2.3 The Phototransistor suggested be used within one year.

2.4 After opening the package, the devices must be stored at 10°C~30°C and ≤ 60%RH, and used within 168 hours (floor life). If unused Phototransistor remain, it should be stored in moisture proof packages.


2.5 If the moisture absorbent material (desiccant material) has faded or unopened bag has exceeded the shelf life or devices (out of bag) have exceeded the floor life, baking treatment is required.

2.6 If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure or recommend the following conditions:

96 hours at 60°C ± 5°C and < 5 % RH (reeled/tubed/loose units)

3. Soldering Condition

3.1 Pb-free solder temperature profile

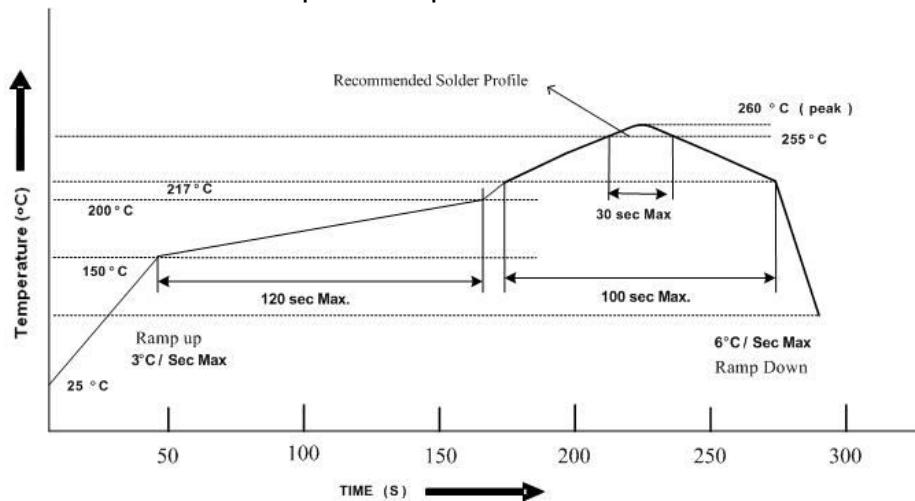

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the Phototransistor during heating.

3.4 After soldering, do not warp the circuit board.




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

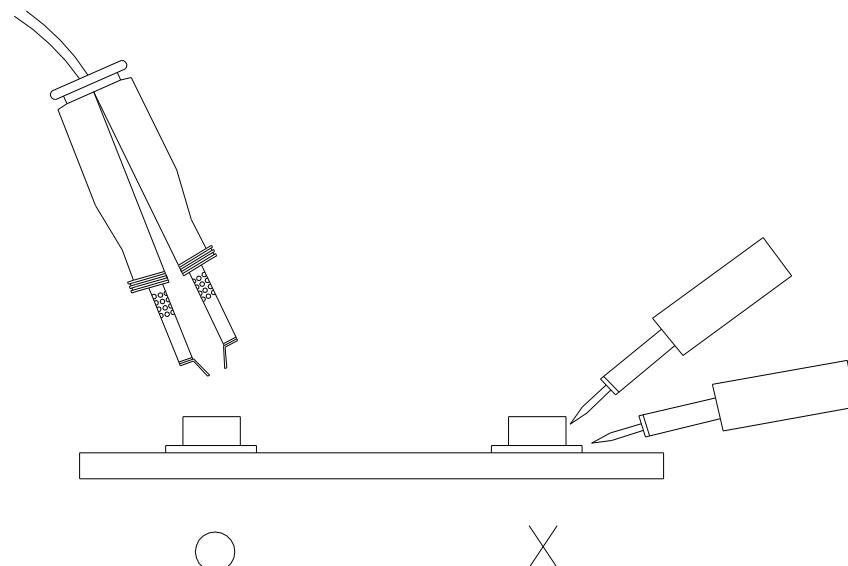

八、免责声明 DISCLAIMER

1. TONYU reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets TONYU published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. TONYU assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of TONYU. Reproduction in any form is prohibited without obtaining TONYU's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized TONYU sales agent for special application request.