

■ GENERATION DESCRIPTION

The LW55XX Series is a 40V μ A-power high accuracy LDO regulator. The μ A-power consumption makes it ideal for most HV power-saving systems. The maximum operating voltage can be as high as 40V. The output accuracy is as excellent as $\pm 1.0\%$.


The other features include low dropout voltage, current limiting protection and thermal shutdown protection.

The LW55XX Series is available in SOT23-3L, SOT23-5, DFN2x2-6L, SOT89-3 and TO-252 packages.

■ APPLICATIONS

- Battery Supplied Systems
- Telecom Systems
- Audio & Video Devices


■ TYPICAL APPLICATION CIRCUIT

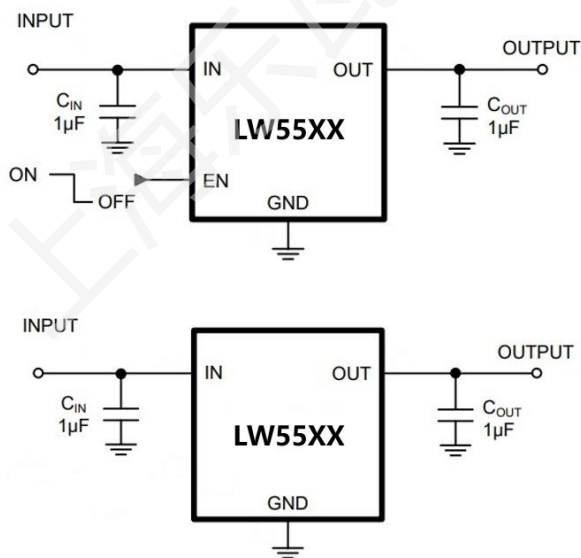

■ FEATURES

- Maximum Operating Voltage: 40V
- Output Voltage: 1.8V, 2.5V, 3.0V, 3.3V, 3.6V, 4.0V, 4.2V and 5.0V
- Output Accuracy: $\pm 1.0\%$
- Low Power Consumption: 1.3 μ A
- Low Standby Current When Shutdown
- Low Temperature Coefficient
- Current Limiting, Thermal Shutdown
- Available in SOT23-3L, SOT23-5, DFN2x2-6L, SOT89-3 and TO-252 Packages


■ TYPICAL PERFORMANCE CHARACTERISTICS

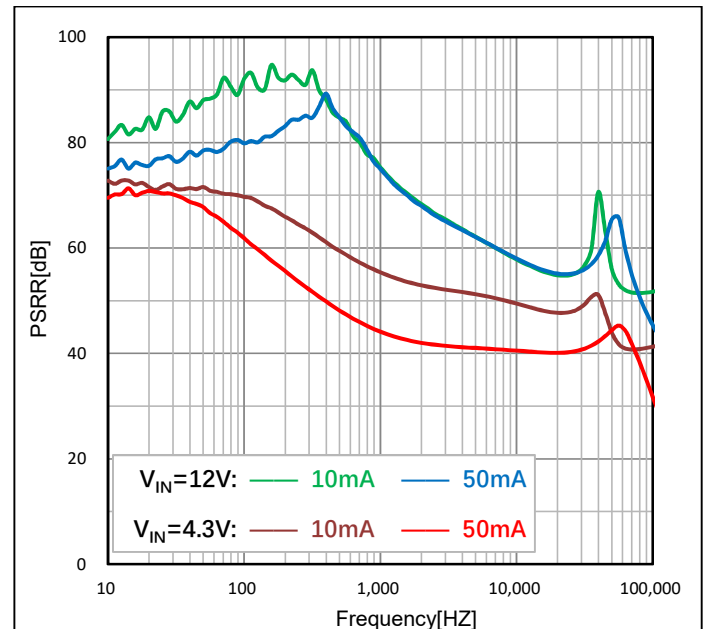

PIN DESCRIPTION

SOT23-3L	PIN No						SYMBOL	DESCRIPTION
	SOT23-5L Type-A	SOT23-5L Type-B	DFN2x2-6L Type-N	SOT89-3L Type-A	SOT89-3L Type-B	TO-252		
1	2	1	3	1	2、TAB	2、TAB	GND	Ground
2	5	3	1	3	1	3	VOUT	Output
3	1	2	6	2、TAB	3	1	VIN	Power Supply Input
-	3	-	4	-	-	-	EN	Chip Enable
-	4	4,5	2,5	-	-	-	NC	Not Connected
-	-	-	Thermal pad	-	-	-	Pad	Connect the thermal pad to a large area GND plane for improved thermal performance.

PIN ASSIGNMENT

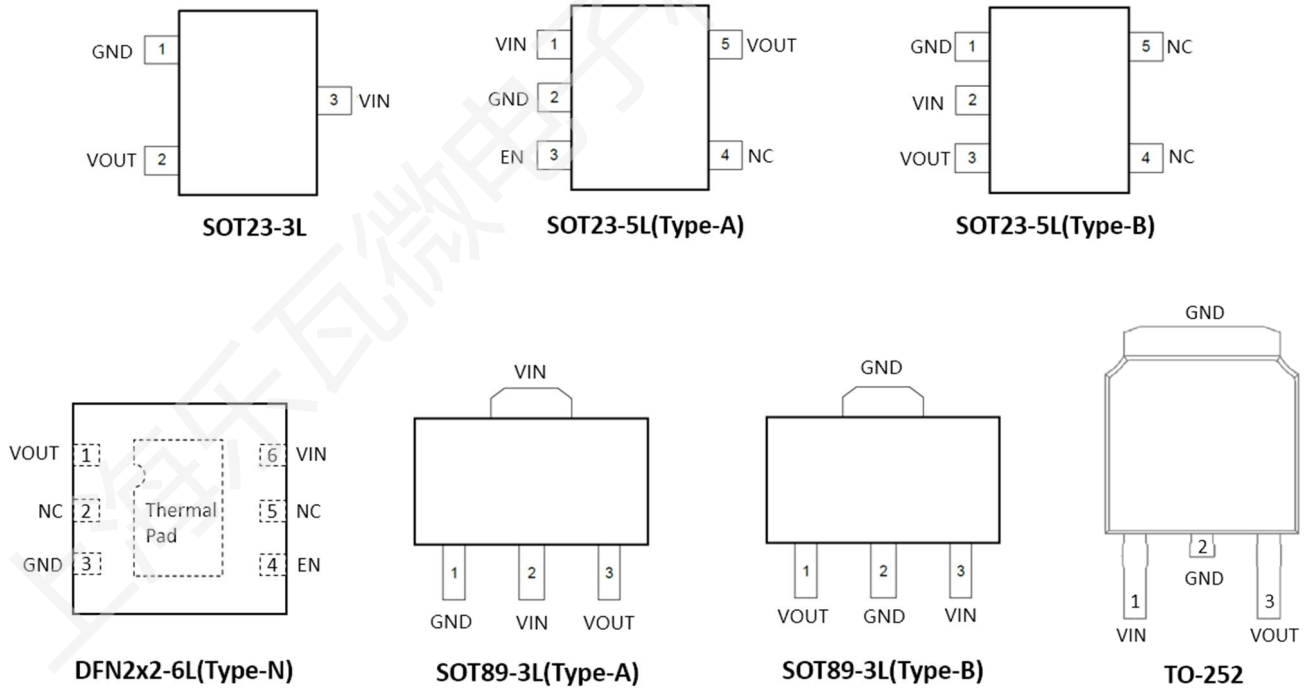

MARK INFORMATION:

SOT23-3L, SOT23-5, SOT89-3, TO-252

XX: VOLTAGE

YY: DATE CODE

LW55XX
YYYY

DFN2x2-6L

XX: VOLTAGE

YY: DATE CODE

LW55XX
YYYY

■ ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

($T_A = 25^\circ\text{C}$, unless otherwise specified.)

Symbol	Item		Rating	Unit
V_{IN}	Supply Voltage		-0.3~44	V
V_{EN}	EN pin to GND Voltage		-0.3~44	V
V_{OUT}	VOUT pin Voltage		-0.3~6.0	V
$V_{(ESD)}$	ESD Susceptibility, Human-body model ⁽²⁾		+/-2000	V
P_D	Maximum Power Dissipation ⁽³⁾	SOT23-3L	0.69	W
		SOT23-5L	0.70	
		DFN2x2-6L	1.74	
		SOT89-3L(Type-A)	1.09	
		SOT89-3L(Type-B)	1.4	
		TO-252	2.3	
$R_{\theta JA}$	Junction-to-ambient Thermal Resistance ⁽³⁾	SOT23-3L	180	$^\circ\text{C/W}$
		SOT23-5L	178	
		DFN2x2-6L	72	
		SOT89-3L(Type-A)	115	
		SOT89-3L(Type-B)	85	
		TO-252	55	
T_J	Junction Temperature Range		-40~150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range		-40~150	$^\circ\text{C}$
T_{SOLDER}	Lead Temperature (Soldering)		260 $^\circ\text{C}$, 10s	

Note:

1. Absolute Maximum Ratings are threshold limit values that must not be exceeded even for an instant under any condition. Moreover, such values for any two items must not be reached simultaneously. Operation above these absolute maximum ratings may cause degradation or permanent damage to the device. These are stress ratings only and do not necessarily imply functional operation below these limits.

2. per ANSI/ESDA/JEDEC JS-001

3. Device mounted on FR-4 PCB

■ RECOMMENDED OPERATING RANGE:

Symbol	Item	Rating	Unit
V_{IN}	VIN Supply Voltage	2.5~40	V
V_{EN}	EN Pin Voltage	0~40	V
V_{OUT}	VOUT pin Voltage	1.8~5.0	V
I_{OUT}	Output Current	0~150	mA
T_J	Junction Temperature Range	-40~125	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS


($V_{IN}=V_{OUT}+1V$, $V_{OUT}=3.3V$, $C_{IN}=C_{OUT}=1\mu F$, $T_A=25^{\circ}C$, unless otherwise specified.)

Symbol	Parameter	Conditions	MIN	TYP	MAX	Unit
V_{IN}	Input Voltage		2.5		40	V
V_{OUT}	Output Voltage	$I_{OUT}=1mA$	-1.0		+1.0	%
I_{LIM}	Current Limit ⁽¹⁾	$V_{IN}=5.0V$, $V_{OUT}=3.3V$	150	250		mA
I_Q	Quiescent Current	$V_{IN}=V_{OUT}+1V$, No Load		1.3	2.0	μA
I_{SHD}	Shutdown Current	$V_{IN}=12V$, $V_{EN}=0V$		0.1	1.0	μA
V_{DROP}	Dropout Voltage ⁽²⁾	$I_{OUT}=10mA$, $V_{OUT}=3.3V$		70		mV
		$I_{OUT}=50mA$, $V_{OUT}=3.3V$		350		mV
		$I_{OUT}=100mA$, $V_{OUT}=3.3V$		700		mV
		$I_{OUT}=150mA$, $V_{OUT}=3.3V$		1000		mV
S_{LINE}	Line Regulation	$V_{IN}=V_{OUT}+1V$ to 40V, $I_{OUT}=1mA$		0.02	0.03	%/V
S_{LOAD}	Load Regulation	$1mA \leq I_{OUT} \leq 100mA$		25	50	mV
I_{SHORT}	Short Current	$V_{OUT}=0V$		90		mA
V_{ENH}	EN High Voltage	$V_{IN}=12V$, $I_{OUT}=1mA$	1.5			V
V_{ENL}	EN Low Voltage				0.4	V
I_{ENH}	EN High Current	$V_{IN}=12V$		0	0.1	μA
I_{ENL}	EN Low Current	$V_{IN}=12V$, $V_{EN}=0V$		0	0.1	μA
PSRR	Power Supply Rejection Ratio	$C_{IN}=None$, $I_{OUT}=10mA$	$V_{IN}=4.3V$, $f=217Hz$		72	dB
			$V_{IN}=4.3V$, $f=1KHz$		55	
			$V_{IN}=12V$, $f=217Hz$		88	
			$V_{IN}=12V$, $f=1KHz$		75	
T_{SD}	Thermal Shut Down	Temperature rising		165		$^{\circ}C$
ΔT_{SD}	TSD Hysteresis	Temperature falling		20		$^{\circ}C$

Note:

- Guaranteed by design
- The dropout voltage is defined as $V_{IN} - V_{OUT}$, when $V_{OUT}=95\%*V_{OUT(NOM)}$

■ SIMPLIFIED BLOCK DIAGRAM:

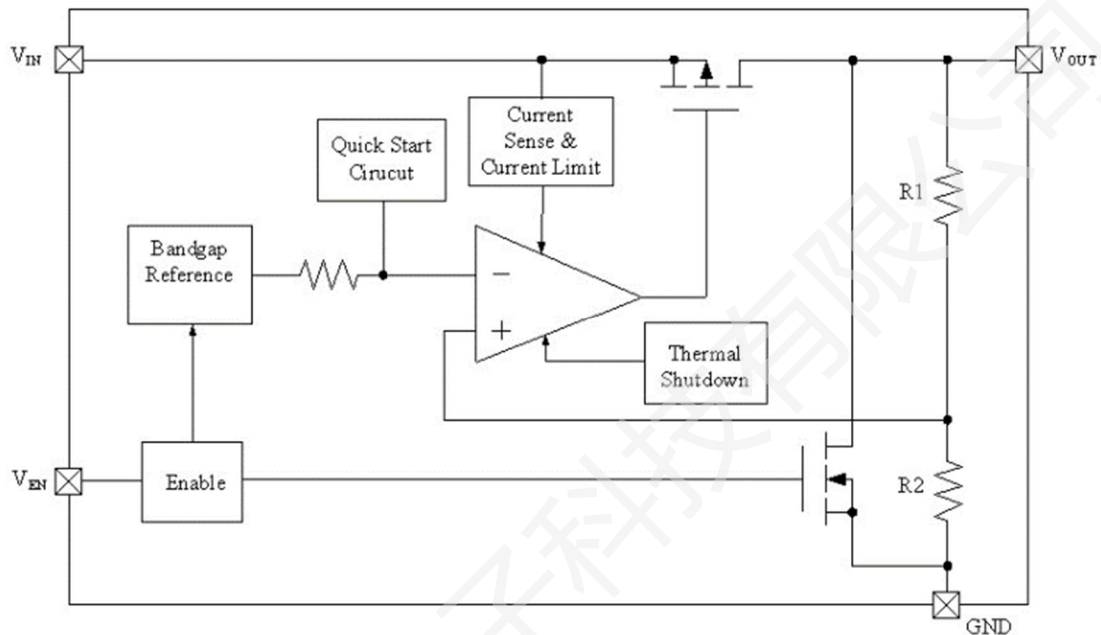

■ DETAIL OPERATION DESCRIPTION:

The LW55XX Series is a high PSRR, low drop-out HV voltage regulator. It consists of a current limiter circuit, a driver transistor, a precision voltage reference and an error correction circuit, and is compatible with low ESR ceramic capacitors. The current limiter's fold-back circuit operates as a short circuit protection as well as the output current limiter.

Current Limiting and Short-Circuit Protection

The current limit circuitry prevents damage to the MOSFET switch and the hub downstream port but can deliver load current up to the current limit threshold through the switch. When a heavy load or short circuit is applied to an enabled switch, a large transient current may flow until the current limit circuitry responds. Once this current limit threshold is exceeded the device enters constant current mode until the thermal shutdown occurs or the fault is removed.

TYPICAL OPERATING CHARACTERISTICS

(Tested under $V_{IN}=V_{OUT}+1V$, $V_{OUT}=3.3V$, $C_{IN}=C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise specified)

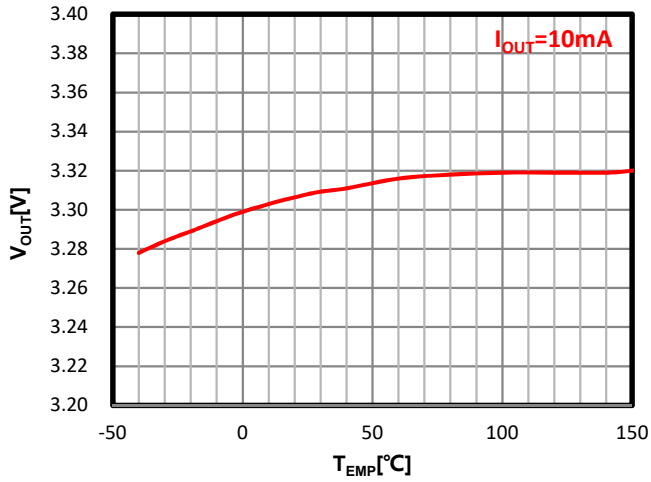


Figure 1. V_{OUT} vs Temperature

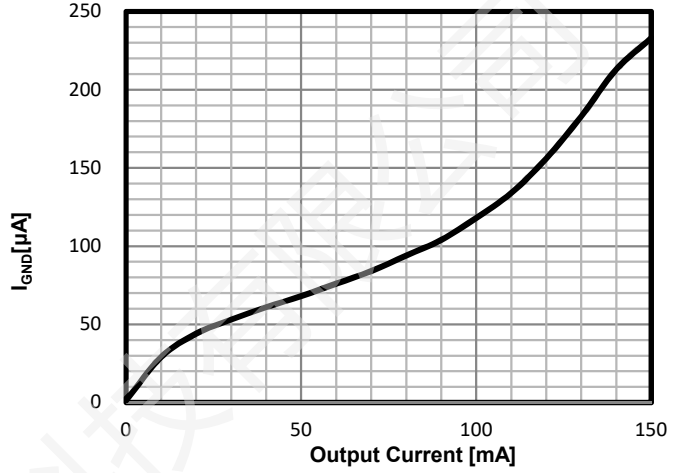


Figure 2. Ground Current vs Output Current

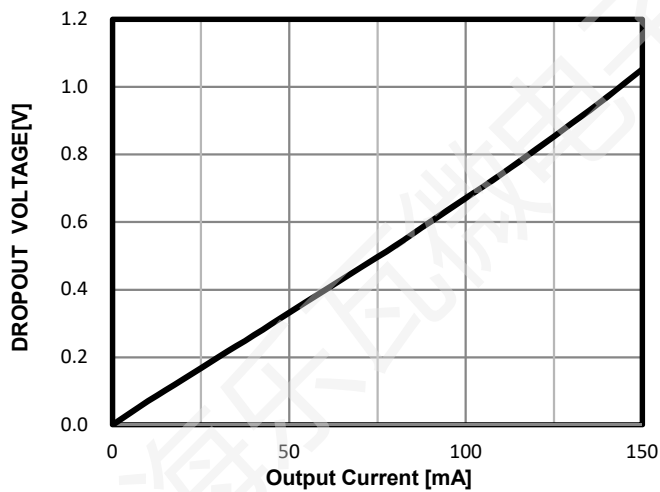


Figure 3. Dropout Voltage vs Output Current

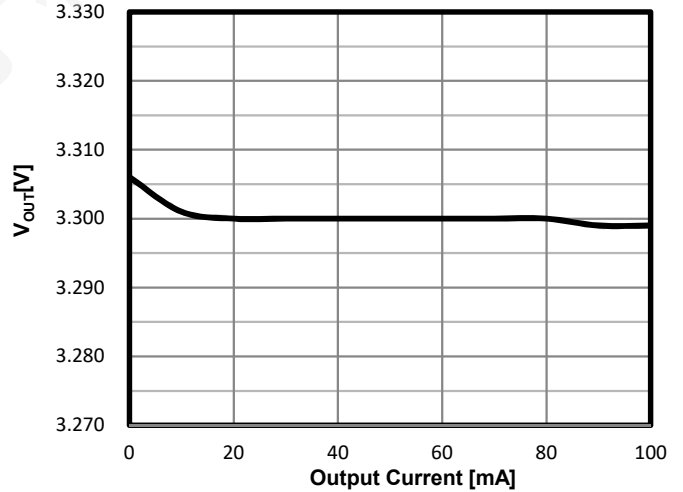


Figure 4. Load Regulation vs Output Current

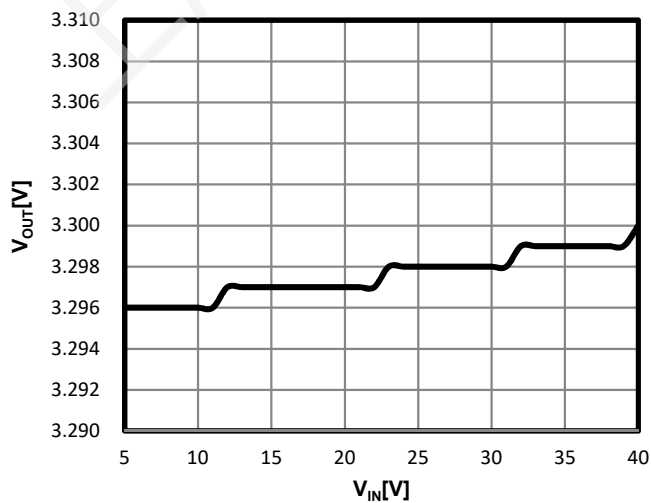


Figure 5. Line Regulation vs V_{IN}




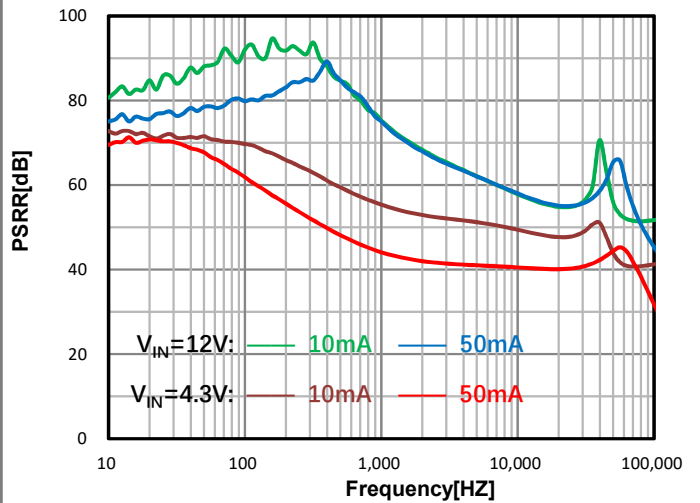


Figure 6. PSRR vs Frequency

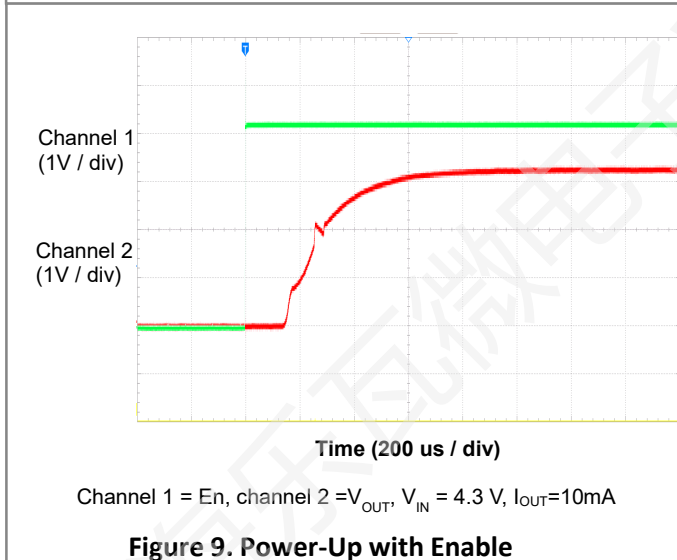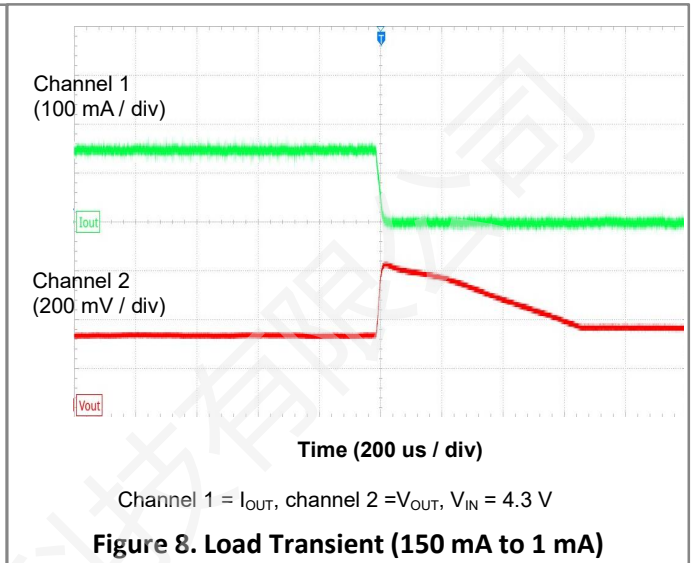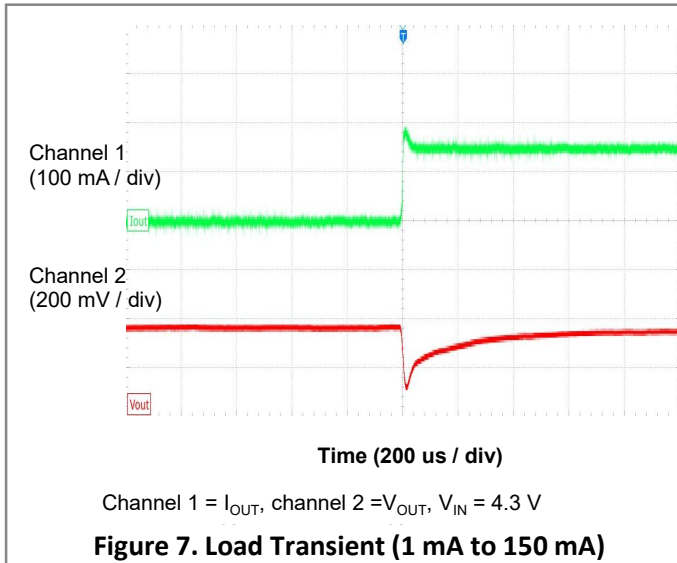

ORDER INFORMATION

LW55①②③④⑤⑥

Designator	Item	Symbol	Description
①②	Output Voltage	18~50	e.g.2.8V→①=2,②=8
③④⑤⑥	Packages	A23D	SOT23-3L
		A23E	SOT23-5L(Type-A)
		B23E	SOT23-5L(Type-B)
		N22G	DFN2x2-6L(Type-N)
		A89C	SOT89-3L(Type-A)
		B89C	SOT89-3L(Type-B)
		A52B	TO-252


Part #	Output Voltage	Package	Shipping
LW5518A23D	1.8V	SOT23-3L	3000 Pcs / Tape & Reel
LW5525A23D	2.5V		
LW5530A23D	3.0V		
LW5533A23D	3.3V		
LW5536A23D	3.6V		
LW5540A23D	4.0V		
LW5542A23D	4.2V		
LW5550A23D	5.0V		
LW5518A23E	1.8V	SOT23-5L(Type-A)	3000 Pcs / Tape & Reel
LW5525A23E	2.5V		
LW5530A23E	3.0V		
LW5533A23E	3.3V		
LW5536A23E	3.6V		
LW5540A23E	4.0V		
LW5542A23E	4.2V		
LW5550A23E	5.0V		
LW5518B23E	1.8V	SOT23-5L(Type-B)	3000 Pcs / Tape & Reel
LW5525B23E	2.5V		
LW5530B23E	3.0V		
LW5533B23E	3.3V		
LW5536B23E	3.6V		
LW5540B23E	4.0V		
LW5542B23E	4.2V		
LW5550B23E	5.0V		

Part #	Output Voltage	Package	Shipping
LW5518N22G	1.8V	DFN2x2-6L(Type-N)	3000 Pcs / Tape & Reel
LW5525N22G	2.5V		
LW5530N22G	3.0V		
LW5533N22G	3.3V		
LW5536N22G	3.6V		
LW5540N22G	4.0V		
LW5542N22G	4.2V		
LW5550N22G	5.0V		
LW5518A89C	1.8V	SOT89-3L(Type-A)	1000 Pcs / Tape & Reel
LW5525A89C	2.5V		
LW5530A89C	3.0V		
LW5533A89C	3.3V		
LW5536A89C	3.6V		
LW5540A89C	4.0V		
LW5542A89C	4.2V		
LW5550A89C	5.0V		
LW5518B89C	1.8V	SOT89-3L(Type-B)	1000 Pcs / Tape & Reel
LW5525B89C	2.5V		
LW5530B89C	3.0V		
LW5533B89C	3.3V		
LW5536B89C	3.6V		
LW5540B89C	4.0V		
LW5542B89C	4.2V		
LW5550B89C	5.0V		
LW5518A52B	1.8V	TO-252	2500 Pcs / Tape & Reel
LW5525A52B	2.5V		
LW5530A52B	3.0V		
LW5533A52B	3.3V		
LW5536A52B	3.6V		
LW5540A52B	4.0V		
LW5542A52B	4.2V		
LW5550A52B	5.0V		

If customers have special output voltage requirements, please contact us.



PACKAGE OUTLINE

3-Pin SOT23-3L Package


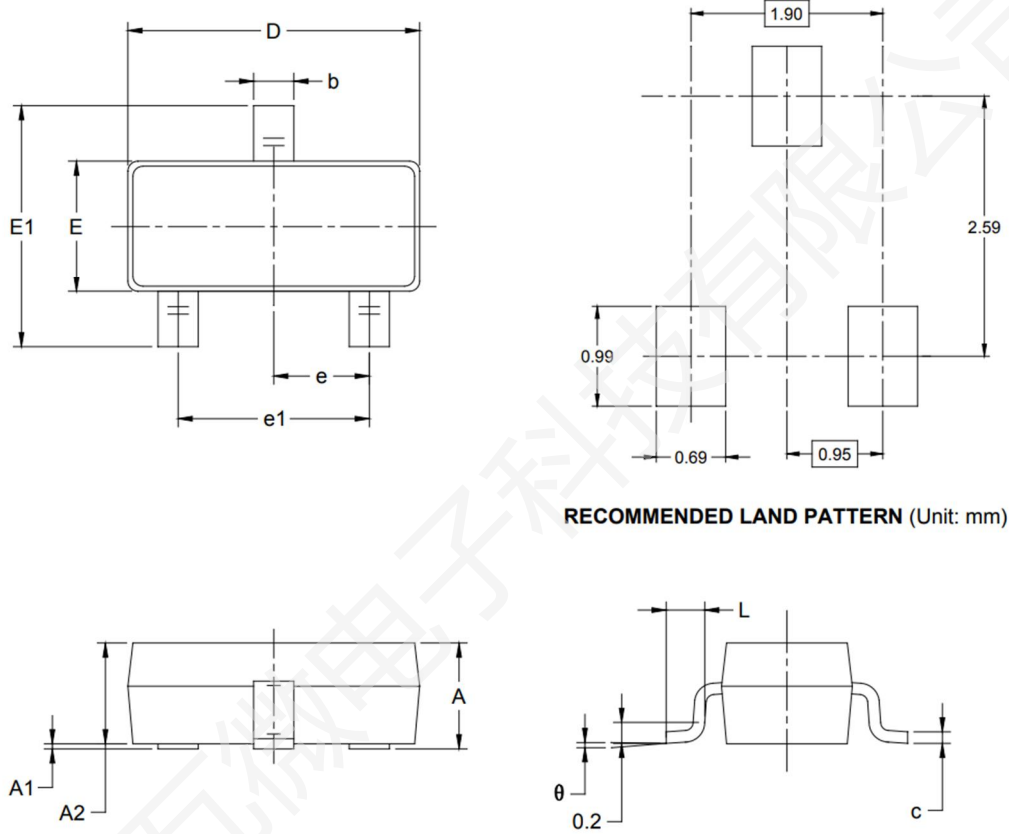


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

5-Pin SOT23-5L Package

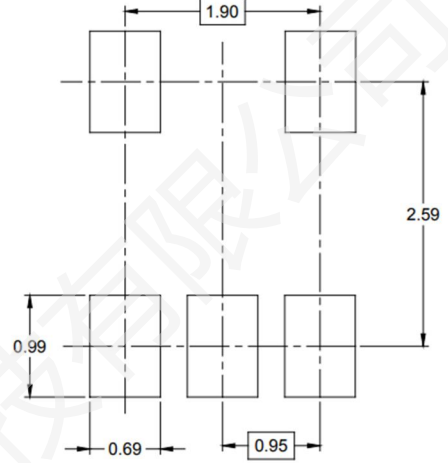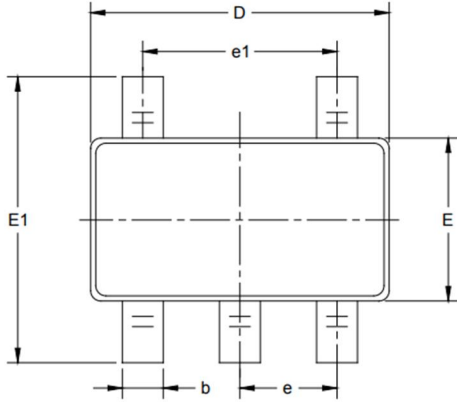


RECOMMENDED LAND PATTERN (Unit: mm)

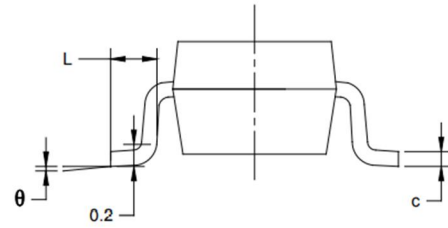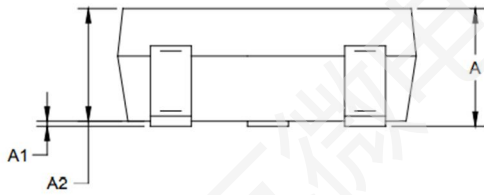


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°


6-Pin DFN2x2-6L Package

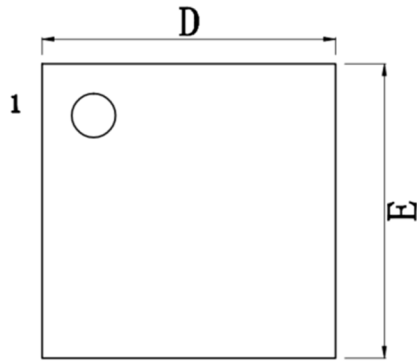

俯视图

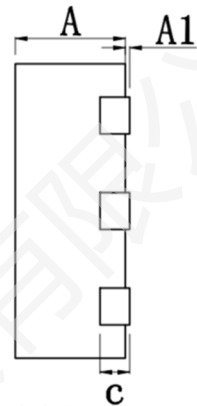


侧视图

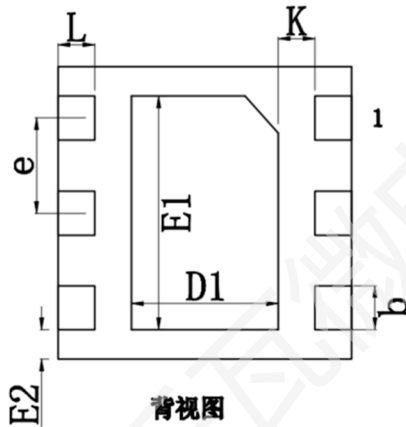

背视图


SYMBOL	MILLMETER		
	MIN	NOM	MAX
A	0.50	0.55	0.60
	0.70	0.75	0.80
A1	0.00	—	0.05
b	0.25	0.30	0.35
c	0.203 TYP		
D	1.95	2.00	2.05
D1	0.90	1.00	1.10
E	1.95	2.00	2.05
E1	1.55	1.60	1.65
E2	0.20 REF		
e	0.65 BSC		
K	0.25 REF		
L	0.20	0.25	0.30

3-Pin SOT89-3L Package

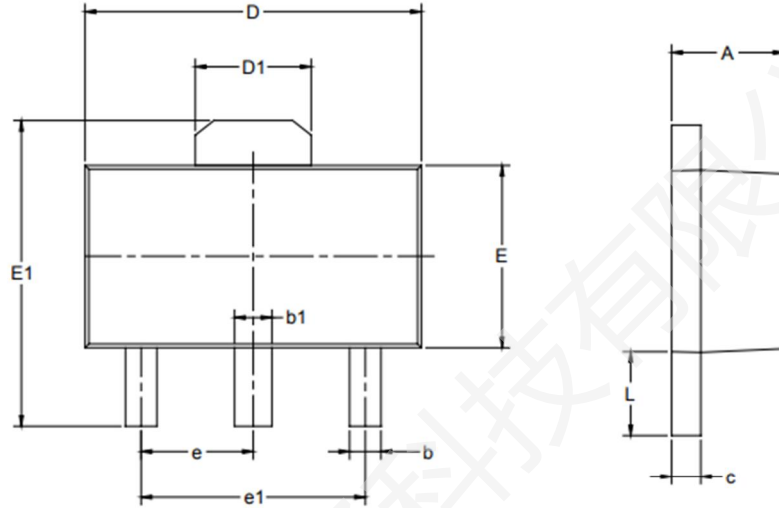

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047

3-Pin TO-252 Package

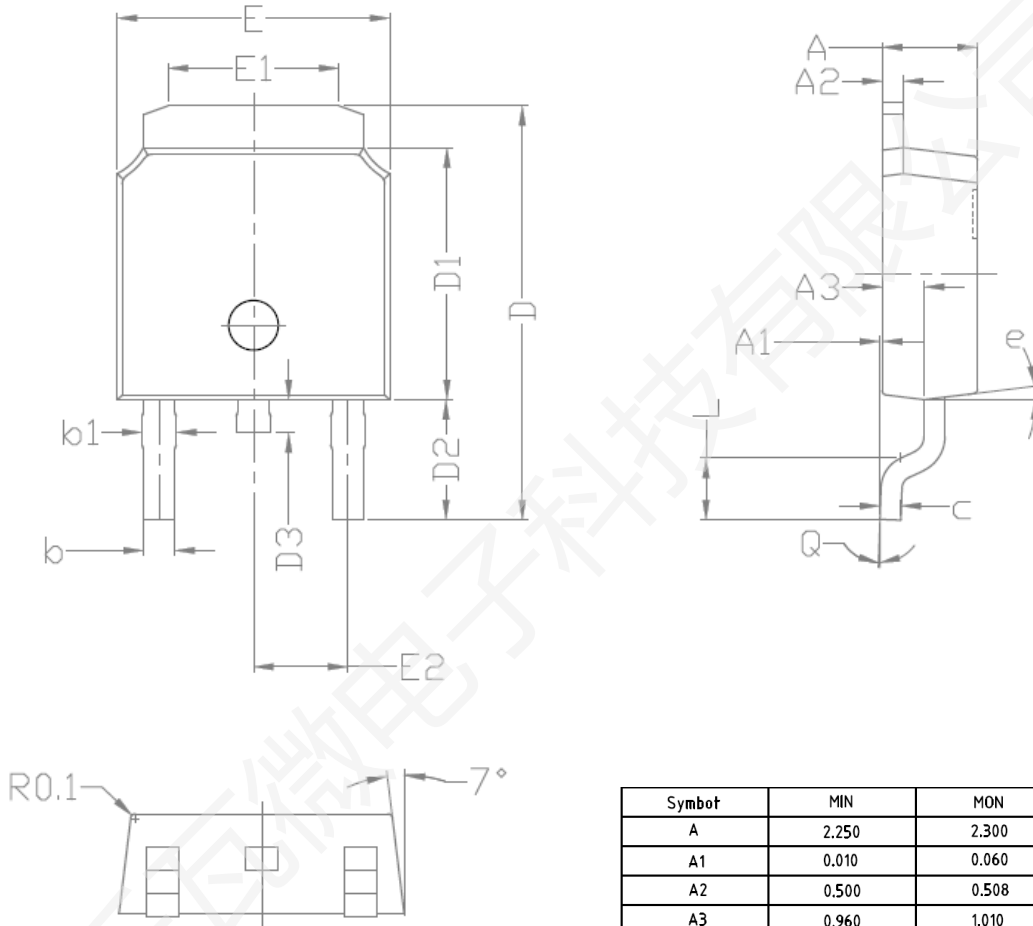

Symbol	MIN	MON	MAX
A	2.250	2.300	2.400
A1	0.010	0.060	0.150
A2	0.500	0.508	0.550
A3	0.960	1.010	1.060
b	0.740	0.760	0.800
b1	0.880	0.900	0.950
c	0.500	0.508	0.550
D	9.800	10.025	10.350
D1	6.050	6.100	6.180
D2	2.850	2.900	2.950
D3	0.700	0.800	2.900
E	6.550	6.600	6.700
E1	4.050	4.130	4.200
E2	2.250	2.286	2.300
L	1.400	1.500	1.600
e	7		
Q	0°	2°	5°

■ DISCLAIMER:

- The product is not intended for use in applications that require extraordinary levels of quality and reliability, such as military, aviation/aerospace and life-support systems or other applications whose failure can be reasonably expected to result in serious physical or material damage.
- Lewa-Micro assumes no responsibility for equipment failures that result from using products at parameters that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any Lewa-Micro products described or contained herein.
- Specifications of any and all Lewa-Micro products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- Lewa-Micro strives to supply high-quality and high-reliability products. However, any and all semiconductor products have a certain probability of failure. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures including but not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- To comply with the compliance requirements of relevant export control laws and regulations, if any Lewa-Micro product (including technical data and services) stated herein is subject to relevant export control laws and regulations, it is recommended that the customer apply for and obtain an export license from the competent authority in advance in accordance with the requirements of relevant laws, and do not conduct export activities without obtaining the license. If the customer fails to comply with the aforementioned compliance requirements, all legal liabilities arising therefrom shall be borne solely by the customer.
- To protect Lewa-Micro's intellectual property rights and the security of commercial information, without the prior written permission of Lewa-Micro, no part of this document shall be reproduced or disseminated in any form or by any means (including photocopying, recording, and other electronic or mechanical means, as well as various information storage and retrieval systems). For unauthorized reproduction or dissemination, Lewa-Micro reserves the right to pursue legal liability.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Lewa-Micro believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc.

Mailing Address: Unit 02&04&05, 10th Floor, Building 5, No.666 Shengxia Road, No.122 Yindong Road,
China (Shanghai) Pilot Free Trade Zone
Shanghai Lewa Micro-electronics Technology Co., Ltd