

MSKSEMI 美森科

SEMICONDUCTOR




ESD



TVS



TSS



MOV



GDT



PLED

MSLR8xx

Product specification

General Description

The Top-Best IC MSLR8xx is a high voltage, low output current, adjustable linear regulator. It has a wide operating input voltage range of 13.2 - 450V. The output voltage can be adjusted from 1.20 - 440V provided that the input voltage is at least 12V greater than the output voltage. The output voltage can be adjusted by means of two external resistors R1 and R2 as shown in the typical application circuits. The MSLR8xx regulates the voltage difference between V_{OUT} and ADJ pins to a nominal value of 1.20V. The 1.20V is amplified by the external resistor ratio R1 and R2. An internal constant bias current of typically 10µA is connected to the ADJ pin. This increases V_{OUT} by a constant voltage of 10µA times R2.

The MSLR8xx has current limiting and temperature limiting. The output current limit is typically 20mA and the minimum temperature limit is 125°C. An output short circuit current will therefore be limited to 20mA. When the junction temperature reaches its temperature limit, the output current and/or output voltage will decrease to keep the junction temperature from exceeding its temperature limit. For SMPS start-up circuit applications, the MSLR8xx turns off when an external voltage greater than the output voltage of the MSLR8xx is applied to V_{OUT} of the MSLR8xx. To maintain stability, a bypass capacitor of 1.0µF or larger and a minimum DC output current of 500µA are required. The device is available in SOT-89, TO-252 (D-PAK), and TO-92 packages.



Features

- 13.2 - 450V input voltage range
- Adjustable 1.20 - 440V output regulation
- 5% output voltage tolerance
- Output current limiting
- 10µA typical ADJ current
- Internal junction temperature limiting

Applications

- Off-line SMPS startup circuits
- Adjustable high voltage constant current source
- Industrial controls
- Motor controls
- Battery chargers
- Power supplies

Reference News

SOT-89	Marking
	
TO-252	Marking
	
TO-92	Marking
	

Parameter	Value
V _{IN} input voltage (voltages ref to ADJ)	-0.5V to +480V
Output voltage range	-0.5V to +470V
Operating ambient temperature range	-40°C to +85°C
Operating junction temperature range	-40°C to +125°C
Storage temperature range	-65°C to +150°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Order information

Orderable Device	Package	Packing Option
MSLR8N8	SOT-89	1000PCS
MSLR8N3	TO-92	1000PCS
MSLR8K4	TO-252	2500PCS

Electrical Characteristics (Test conditions unless otherwise specified: -40°C < T_A < 85°C.)

Sym	Parameter	Min	Typ	Max	Units	Conditions
V _{IN} - V _{OUT}	Input to output voltage difference	12	-	450	V	---
V _{OUT}	Overall output voltage regulation	1.14	1.20	1.26	V	13.2V < V _{IN} < 400V, R1 = 2.4KΩ, R2 = 0
V _{OUT}	Overall output voltage regulation	375	400	426	V	R1 = 2.4KΩ, R2 = 782KΩ
ΔV _{OUT}	Line regulation	-	0.00 3	0.01	%/V	17V < V _{IN} < 400V, V _{OUT} = 5V, I _{OUT} = 0.5mA
ΔV _{OUT}	Load regulation	-	1.4	3.0	%	V _{IN} = 17V, V _{OUT} = 5V, 0.5mA < I _{OUT} < 10mA
ΔV _{OUT}	Temperature regulation	-1	-	+1	%	V _{IN} = 17V, V _{OUT} = 5V, I _{OUT} = 10mA, -40°C < T _A < 85°C
I _{OUT}	Output current limit	10	-	30	mA	T _J < 85°C, V _{IN} - V _{OUT} = 12V
I _{OUT}	Output current limit	-	-	0.5	mA	T _J < 125°C, V _{IN} - V _{OUT} = 450V
I _{OUT}	Minimum output current	-	0.3	0.5	mA	Includes R1 and load current
I _{ADJ}	Adjust output current	5.0	10	15	uA	---
C2	Minimum output load capacitance	1.0	-	-	uF	---
DV _{OUT} / DV _{IN}	Ripple rejection ratio	50	60	-	dB	120Hz, V _{OUT} = 5V
T _{LIMIT}	Junction temperature limit	125	-	-	°C	---


Thermal Characteristics

Package	Power Dissipation @ $T_A = 25^\circ\text{C}$	$\theta_{jc} \text{ }^\circ\text{C/W}$	$\theta_{ja} \text{ }^\circ\text{C/W}$
TO-92	0.74W	125	170
TO-89	1.6W	15	78t
TO-252	2.5W	6.25	50t

Note:


t Mounted on FR4 board, 25mmx25mmx1.57mm.

Typical Application Circuit

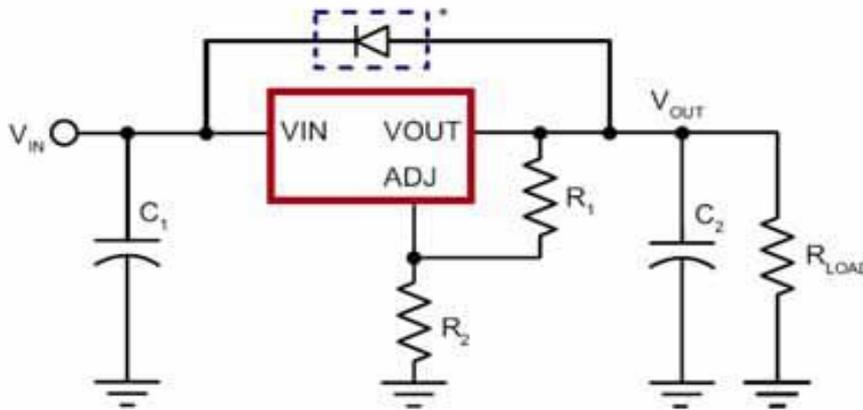


Required for conditions where V_{IN} is less than V_{OUT}

Functional Block Diagram

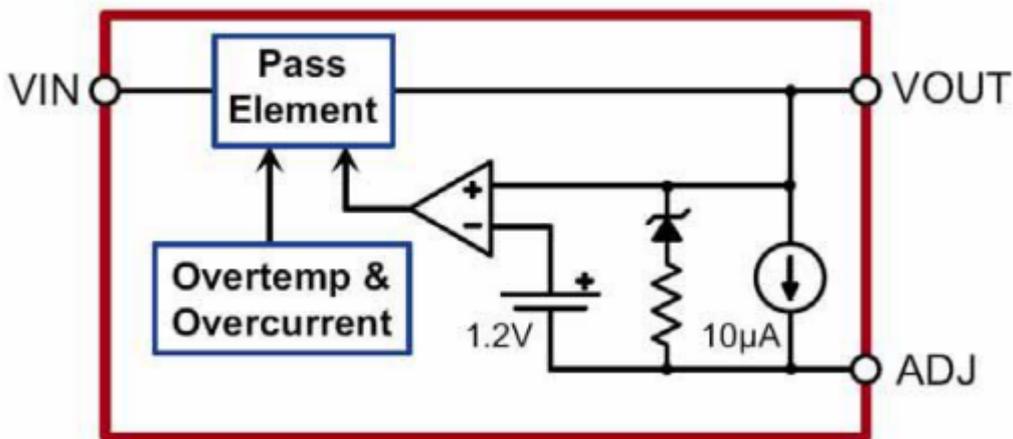

Typical Application Circuits

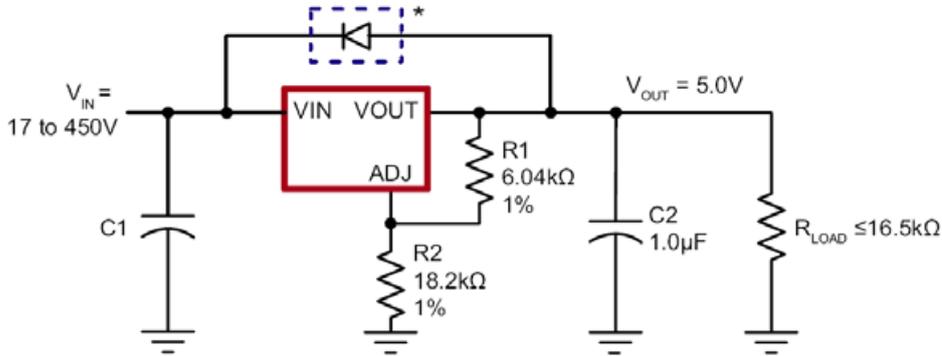

Required for conditions where V_{IN} is less than V_{OUT} , $V_{OUT} = 1.2V * \left(1 + \frac{R2}{R1}\right) + I_{ADJ} * R2$

Figure 1: High Input Voltage, 5.0V Output Linear Regulator

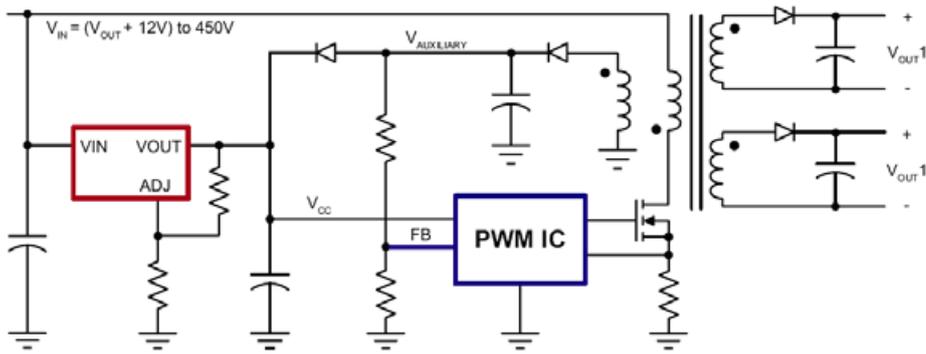


Figure 2: SMPS Start-Up Circuit



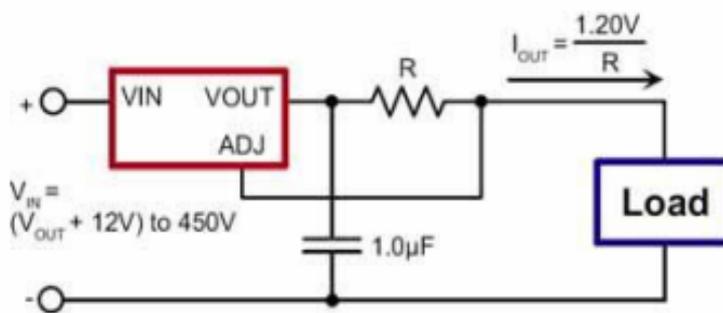


Figure 3: High Voltage Adjustable Constant Current Source



Typical Performance Curves

Load Transient Response

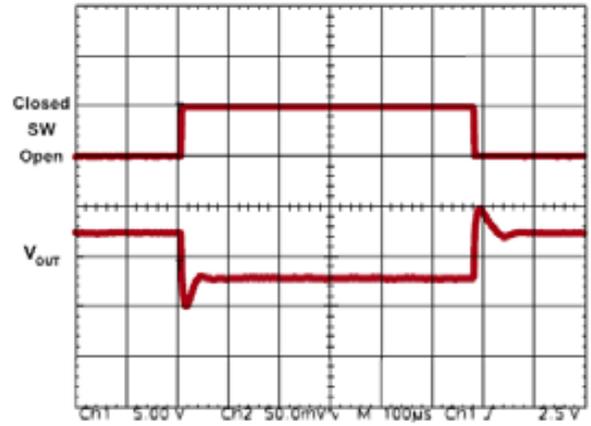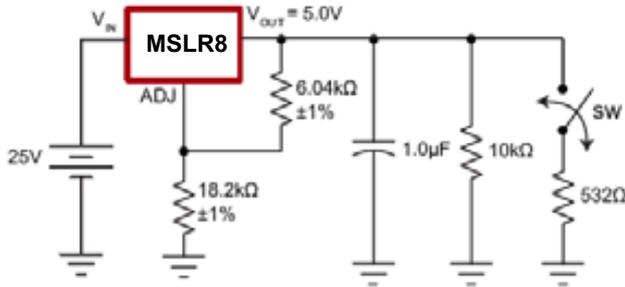


Load Transient Response


Line Transient Response

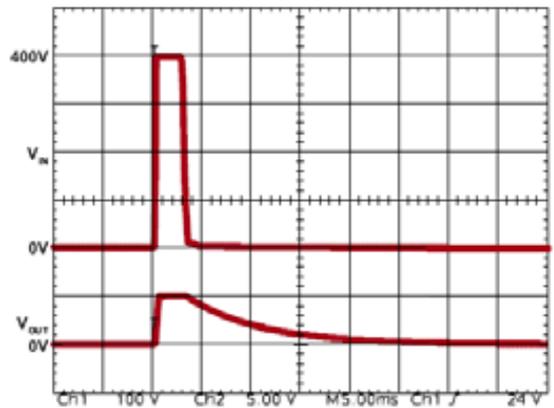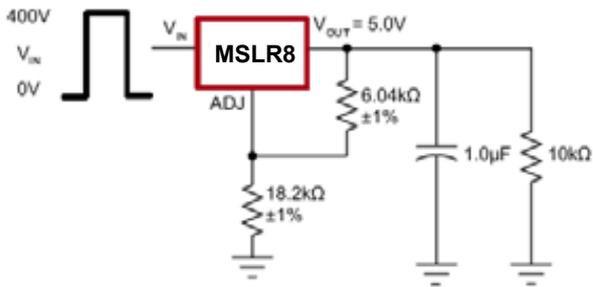

Line Transient Response

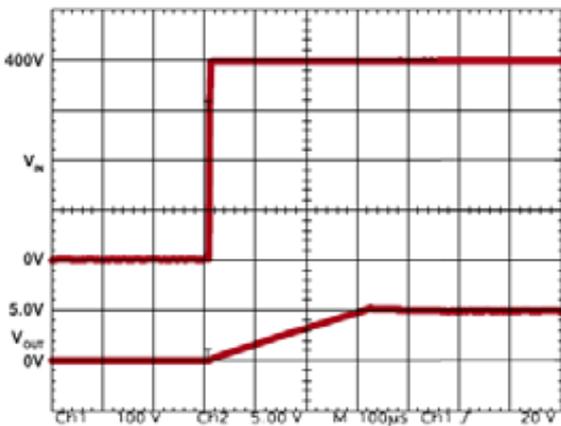



Line Power Up Transient

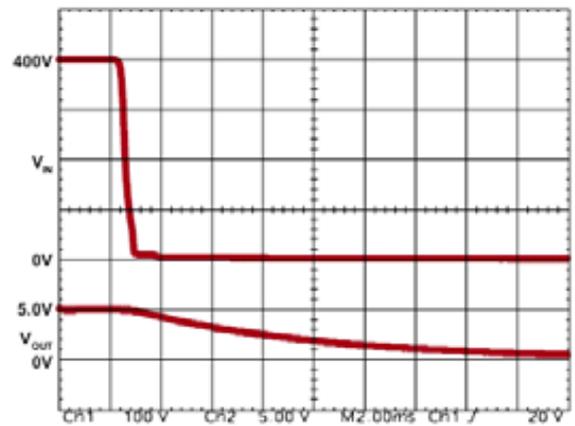

Line Power Down Transient



Typical Performance Curves (cont.)

Load Transient Response

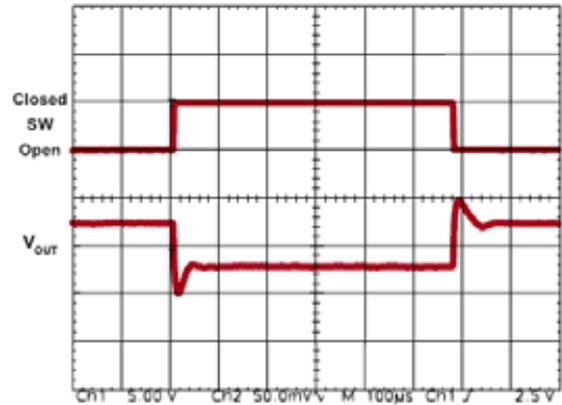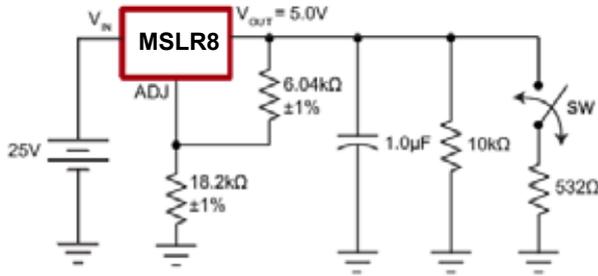


Load Transient Response


Line Transient Response

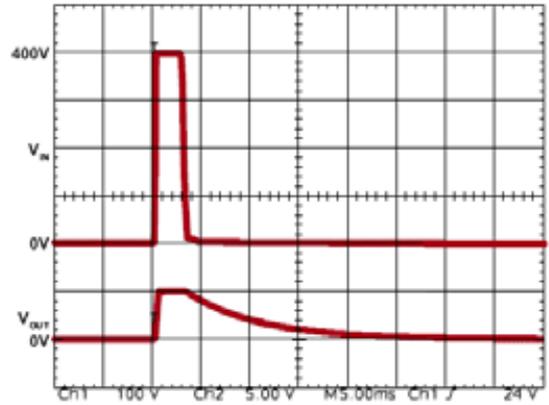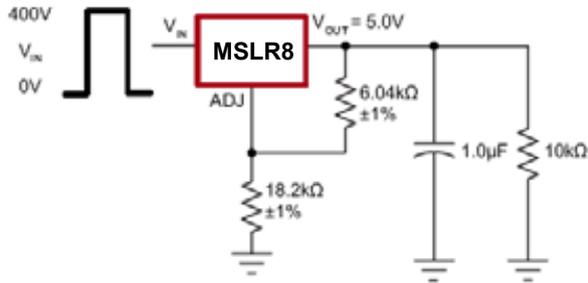

Line Transient Response

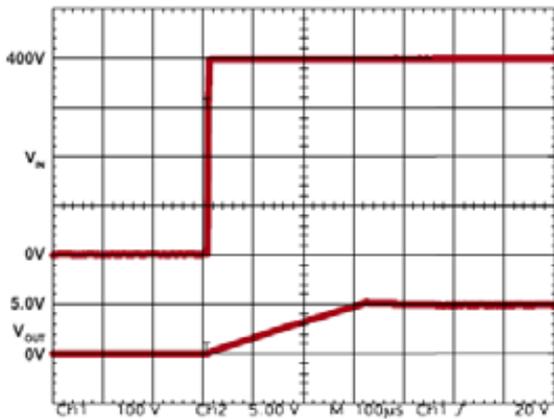




Line Power Up Transient

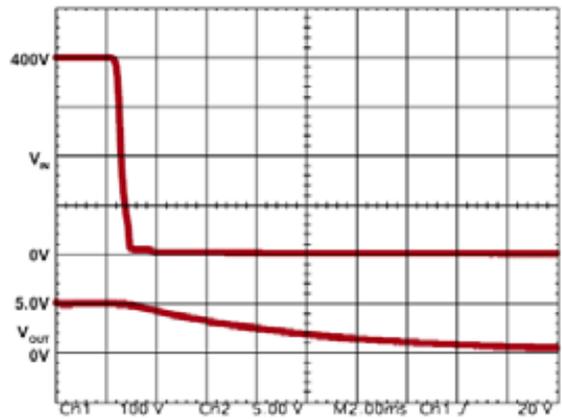

Line Power Down Transient


PACKAGE MECHANICAL DATA

SOT-89

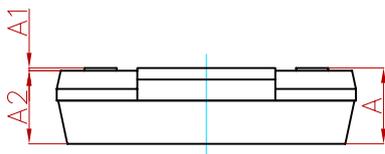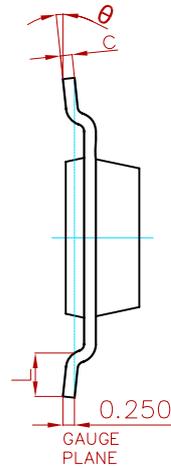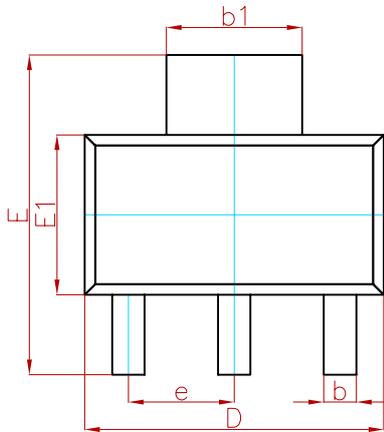

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	—	1.800	—	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.840	0.026	0.033
b1	2.900	3.100	0.114	0.122
c	0.230	0.350	0.009	0.014
D	6.300	6.700	0.248	0.264
E	6.700	7.300	0.264	0.287
E1	3.300	3.700	0.130	0.146
e	2.300(BSC)		0.091(BSC)	
L	0.750	—	0.030	—
θ	0°	10°	0°	10°


Suggested Pad Layout

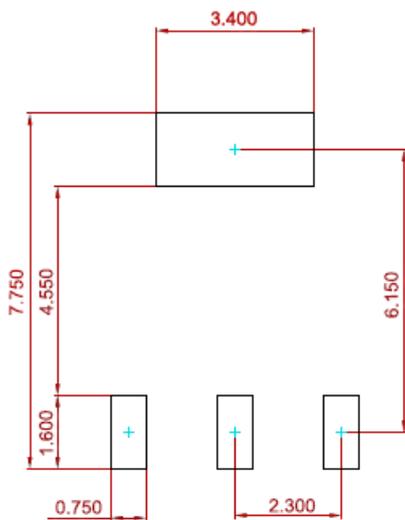

Note:


1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.050\text{mm}$.
3. The pad layout is for reference purposes only.

TO-92



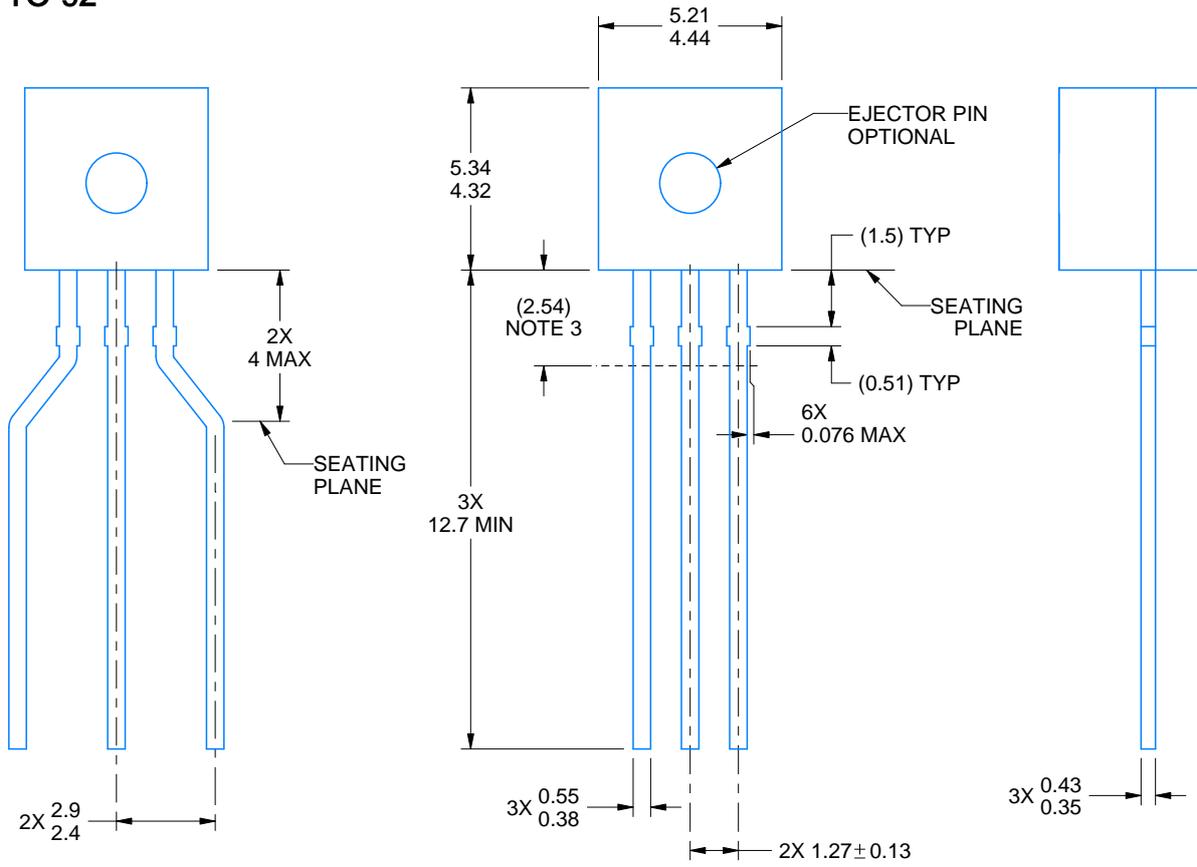


FORMED LEAD OPTION
OTHER DIMENSIONS IDENTICAL
TO STRAIGHT LEAD OPTION

STRAIGHT LEAD OPTION

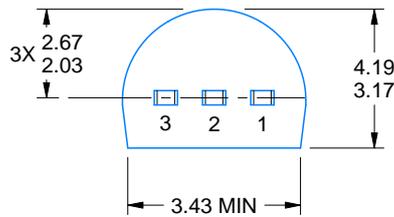

TO-252

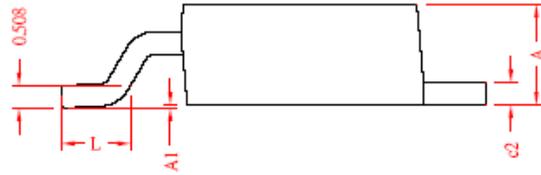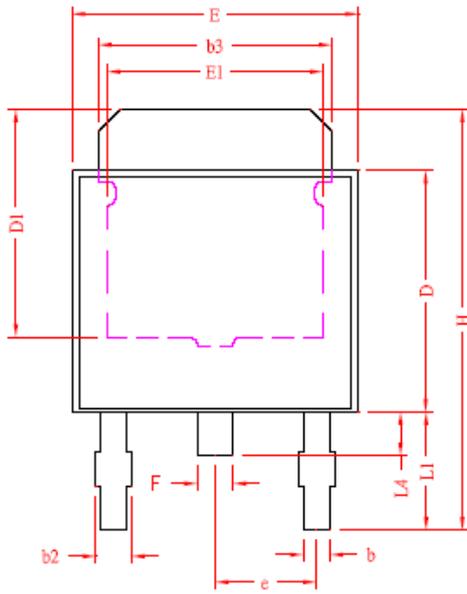

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.20	2.40	E	6.40	6.80
A1	0	0.15	EI	3.81	---
b	0.50	0.70	e	2.30 REF.	
b2	0.60	0.90	F	0.70	0.90
b3	5.20	5.50	H	9.40	10.20
e2	0.45	0.55	L	1.40	1.77
D	5.40	5.80	L1	2.40	3.00
DI	4.57	---	L4	0.80	1.20

Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringement of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.