


Qualcomm's IPQ5322 Embedded Board Supporting WiFi 7

WiFi 7 support / 1 x 2.5Gbps /
PoE support / AP and Client mode support

Model: WPQ530

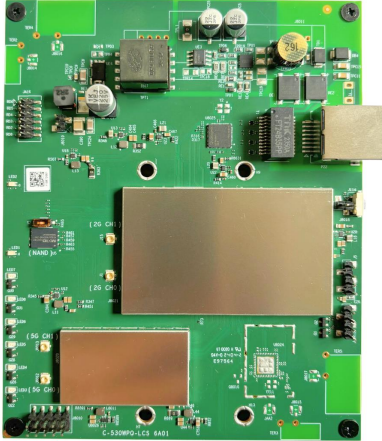

KEY FEATURES

- Qualcomm IPQ5322 Quad-Core Cortex-A53 @ 1.5GHz processor
- 2x2 on-board 2.4GHz radio, up to 688Mbps physical data rate
- 2x2 on-board 5-7GHz radio, up to 5764Mbps physical data rate
- 1x 2.5Gbps Ethernet port
- 6x LED (Green) Indicators, 2x LED (RGB) Indicators
- AP mode: Support 2.4GHz and (5GHz or 6GHz)
- Client mode: Support 2.4GHz and (5GHz-7GHz)
- High Power Variant (Available in 5GHz and 6GHz)

APPLICATIONS

- 802.11be MU-MIMO OFDMA Access Point
- Internet of Things (IoT)
- HD streaming and gaming

Specifications

Chipset	Qualcomm IPQ5322 Quad-Core Cortex-A53 @ 1.5GHz processor 'Miami' Series
Reference Design	Qualcomm AP.MI01.2
System Memory	1GB, DDR4 16-bit (1x16-bit) interface
Flash	NAND Flash: 512MB NOR Flash: 8MB
Wireless	On-board 2x2 2.4GHz MU-MIMO 802.11b/g/n/ax/be, max 24dBm per chain On-board 2x2 5-7GHz MU-MIMO 802.11a/n/ac/ax/be, max 19dBm per chain 4x U.FL connectors (IPQ5322)
Frequency Range	2.4GHz: 2.412~2.472GHz 5-7GHz: 5.180~7.125GHz
Modulation Techniques	OFDMA: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, 4096-QAM
Interface	1x 2.5Gigabit Ethernet LAN/WAN RJ45 Port 1x LED 12 Pin Connector 1x JTAG 10 Pin Connector 1x UART 4 Pin Connector 4x U.FL Connector 1x SWITCH Button
LED	6x LED (Green) Indicators 2x LED (RGB) Indicators
Power Consumption (Board only)	16W (Max)
Power over Ethernet (PoE)	Supports up to 3at standard through the 2.5Gbps Ethernet port
Certification	REACH & RoHS Compliance
Environmental Temperature	Operating temperature: -20°C to 70°C, Storage: -40°C to 90°C
Environmental Humidity, Non-Condensing	Operating: 5% to 95%, Storage: Max. 90%
Dimensions (W x H x D) in mm	135 x 110 x 20

1. The Serial Port is a 4-pin header (TTL). A Serial Converter is available to change the TTL signals on the board to RS-232 signals for debugging.

2. The JTAG Port is a 10-pin header. A JTAG kit is for writing your self-developed loader and firmware directly.

*Configurations are subject to change without notifications.

RF Performance Table for 2.4GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
2.4GHz 802.11be EHT20	MCS 0	24dBm	27dBm	±2dB
	MCS 1	23dBm	26dBm	±2dB
	MCS 2	22dBm	25dBm	±2dB
	MCS 3	21dBm	24dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB
	MCS 6	19dBm	22dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB
	MCS 10	17dBm	20dBm	±2dB
	MCS 11	17dBm	20dBm	±2dB
	MCS 12	16dBm	19dBm	±2dB
	MCS 13	16dBm	19dBm	±2dB
2.4GHz 802.11be EHT40	MCS 0	24dBm	27dBm	±2dB
	MCS 1	23dBm	26dBm	±2dB
	MCS 2	22dBm	25dBm	±2dB
	MCS 3	21dBm	24dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB
	MCS 6	19dBm	22dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB
	MCS 10	17dBm	20dBm	±2dB
	MCS 11	17dBm	20dBm	±2dB
	MCS 12	16dBm	19dBm	±2dB
	MCS 13	16dBm	19dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11be EHT20	MCS 0	-94dBm	±2dB
	MCS 1	-91dBm	±2dB
	MCS 2	-88dBm	±2dB
	MCS 3	-86dBm	±2dB
	MCS 4	-83dBm	±2dB
	MCS 5	-79dBm	±2dB
	MCS 6	-77dBm	±2dB
	MCS 7	-75dBm	±2dB
	MCS 8	-72dBm	±2dB
	MCS 9	-70dBm	±2dB
	MCS 10	-67dBm	±2dB
	MCS 11	-65dBm	±2dB
	MCS 12	-	±2dB
	MCS 13	-	±2dB
2.4GHz 802.11be EHT40	MCS 0	-91dBm	±2dB
	MCS 1	-88dBm	±2dB
	MCS 2	-85dBm	±2dB
	MCS 3	-83dBm	±2dB
	MCS 4	-80dBm	±2dB
	MCS 5	-77dBm	±2dB
	MCS 6	-75dBm	±2dB
	MCS 7	-72dBm	±2dB
	MCS 8	-68dBm	±2dB
	MCS 9	-66dBm	±2dB
	MCS 10	-64dBm	±2dB
	MCS 11	-61dBm	±2dB
	MCS 12	-	±2dB
	MCS 13	-	±2dB

RF Performance Table for 5 GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
5 GHz 802.11be EHT20	MCS 0	19dBm	22dBm	±2dB
	MCS 1	19dBm	22dBm	±2dB
	MCS 2	18dBm	21dBm	±2dB
	MCS 3	18dBm	21dBm	±2dB
	MCS 4	17dBm	20dBm	±2dB
	MCS 5	17dBm	20dBm	±2dB
	MCS 6	16dBm	19dBm	±2dB
	MCS 7	16dBm	19dBm	±2dB
	MCS 8	16dBm	19dBm	±2dB
	MCS 9	15dBm	18dBm	±2dB
	MCS 10	14dBm	17dBm	±2dB
	MCS 11	14dBm	17dBm	±2dB
	MCS 12	13dBm	16dBm	±2dB
	MCS 13	13dBm	16dBm	±2dB
5 GHz 802.11be EHT40	MCS 0	19dBm	22dBm	±2dB
	MCS 1	19dBm	22dBm	±2dB
	MCS 2	18dBm	21dBm	±2dB
	MCS 3	18dBm	21dBm	±2dB
	MCS 4	17dBm	20dBm	±2dB
	MCS 5	17dBm	20dBm	±2dB
	MCS 6	16dBm	19dBm	±2dB
	MCS 7	16dBm	19dBm	±2dB
	MCS 8	16dBm	19dBm	±2dB
	MCS 9	15dBm	18dBm	±2dB
	MCS 10	14dBm	17dBm	±2dB
	MCS 11	14dBm	17dBm	±2dB
	MCS 12	13dBm	16dBm	±2dB
	MCS 13	13dBm	16dBm	±2dB
5 GHz 802.11be EHT80	MCS 0	19dBm	22dBm	±2dB
	MCS 1	19dBm	22dBm	±2dB
	MCS 2	18dBm	21dBm	±2dB
	MCS 3	18dBm	21dBm	±2dB
	MCS 4	17dBm	20dBm	±2dB
	MCS 5	17dBm	20dBm	±2dB
	MCS 6	16dBm	19dBm	±2dB
	MCS 7	16dBm	19dBm	±2dB
	MCS 8	16dBm	19dBm	±2dB
	MCS 9	15dBm	18dBm	±2dB
	MCS 10	14dBm	17dBm	±2dB
	MCS 11	14dBm	17dBm	±2dB
	MCS 12	13dBm	16dBm	±2dB
	MCS 13	13dBm	16dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
5 GHz 802.11be EHT20	MCS 0	-93dBm	±2dB
	MCS 1	-91dBm	±2dB
	MCS 2	-90dBm	±2dB
	MCS 3	-87dBm	±2dB
	MCS 4	-84dBm	±2dB
	MCS 5	-80dBm	±2dB
	MCS 6	-78dBm	±2dB
	MCS 7	-77dBm	±2dB
	MCS 8	-72dBm	±2dB
	MCS 9	-71dBm	±2dB
	MCS 10	-68dBm	±2dB
	MCS 11	-66dBm	±2dB
	MCS 12	-62dBm	±2dB
	MCS 13	-58dBm	±2dB
5 GHz 802.11be EHT40	MCS 0	-90dBm	±2dB
	MCS 1	-88dBm	±2dB
	MCS 2	-86dBm	±2dB
	MCS 3	-84dBm	±2dB
	MCS 4	-81dBm	±2dB
	MCS 5	-77dBm	±2dB
	MCS 6	-75dBm	±2dB
	MCS 7	-73dBm	±2dB
	MCS 8	-70dBm	±2dB
	MCS 9	-68dBm	±2dB
	MCS 10	-65dBm	±2dB
	MCS 11	-62dBm	±2dB
	MCS 12	-59dBm	±2dB
	MCS 13	-58dBm	±2dB
5 GHz 802.11be EHT80	MCS 0	-88dBm	±2dB
	MCS 1	-85dBm	±2dB
	MCS 2	-83dBm	±2dB
	MCS 3	-81dBm	±2dB
	MCS 4	-78dBm	±2dB
	MCS 5	-73dBm	±2dB
	MCS 6	-72dBm	±2dB
	MCS 7	-71dBm	±2dB
	MCS 8	-68dBm	±2dB
	MCS 9	-66dBm	±2dB
	MCS 10	-63dBm	±2dB
	MCS 11	-60dBm	±2dB
	MCS 12	-57dBm	±2dB
	MCS 13	-55dBm	±2dB

RF Performance Table for 5 GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
5GHz 802.11be EHT160	MCS 0	19dBm	22dBm	±2dB
	MCS 1	19dBm	22dBm	±2dB
	MCS 2	18dBm	21dBm	±2dB
	MCS 3	18dBm	21dBm	±2dB
	MCS 4	17dBm	20dBm	±2dB
	MCS 5	17dBm	20dBm	±2dB
	MCS 6	16dBm	19dBm	±2dB
	MCS 7	16dBm	19dBm	±2dB
	MCS 8	16dBm	19dBm	±2dB
	MCS 9	15dBm	18dBm	±2dB
	MCS 10	14dBm	17dBm	±2dB
	MCS 11	14dBm	17dBm	±2dB
	MCS 12	13dBm	16dBm	±2dB
	MCS 13	13dBm	16dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
5 GHz 802.11be EHT160	MCS 0	-86dBm	±2dB
	MCS 1	-83dBm	±2dB
	MCS 2	-81dBm	±2dB
	MCS 3	-78dBm	±2dB
	MCS 4	-75dBm	±2dB
	MCS 5	-71dBm	±2dB
	MCS 6	-70dBm	±2dB
	MCS 7	-68dBm	±2dB
	MCS 8	-65dBm	±2dB
	MCS 9	-63dBm	±2dB
	MCS 10	-58dBm	±2dB
	MCS 11	-56dBm	±2dB
	MCS 12	-55dBm	±2dB
	MCS 13	-53dBm	±2dB

RF Performance Table for 6 GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
6 GHz 802.11be EHT20	MCS 0	18dBm	21dBm	±2dB
	MCS 1	17dBm	20dBm	±2dB
	MCS 2	17dBm	20dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	15dBm	18dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	14dBm	17dBm	±2dB
	MCS 7	13dBm	16dBm	±2dB
	MCS 8	12dBm	15dBm	±2dB
	MCS 9	11dBm	14dBm	±2dB
	MCS 10	10dBm	13dBm	±2dB
	MCS 11	10dBm	13dBm	±2dB
	MCS 12	9dBm	12dBm	±2dB
	MCS 13	9dBm	12dBm	±2dB
6 GHz 802.11be EHT40	MCS 0	18dBm	21dBm	±2dB
	MCS 1	17dBm	20dBm	±2dB
	MCS 2	17dBm	20dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	15dBm	18dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	14dBm	17dBm	±2dB
	MCS 7	13dBm	16dBm	±2dB
	MCS 8	12dBm	15dBm	±2dB
	MCS 9	11dBm	14dBm	±2dB
	MCS 10	10dBm	13dBm	±2dB
	MCS 11	10dBm	13dBm	±2dB
	MCS 12	9dBm	12dBm	±2dB
	MCS 13	9dBm	12dBm	±2dB
6 GHz 802.11be EHT80	MCS 0	18dBm	21dBm	±2dB
	MCS 1	17dBm	20dBm	±2dB
	MCS 2	17dBm	20dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	15dBm	18dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	14dBm	17dBm	±2dB
	MCS 7	13dBm	16dBm	±2dB
	MCS 8	12dBm	15dBm	±2dB
	MCS 9	11dBm	14dBm	±2dB
	MCS 10	10dBm	13dBm	±2dB
	MCS 11	10dBm	13dBm	±2dB
	MCS 12	9dBm	12dBm	±2dB
	MCS 13	9dBm	12dBm	±2dB






	Data Rate	RX Specifications Sensitivity	Tolerance
6 GHz 802.11be EHT20	MCS 0	-94dBm	±2dB
	MCS 1	-92dBm	±2dB
	MCS 2	-89dBm	±2dB
	MCS 3	-86dBm	±2dB
	MCS 4	-83dBm	±2dB
	MCS 5	-79dBm	±2dB
	MCS 6	-77dBm	±2dB
	MCS 7	-76dBm	±2dB
	MCS 8	-72dBm	±2dB
	MCS 9	-71dBm	±2dB
	MCS 10	-67dBm	±2dB
	MCS 11	-65dBm	±2dB
	MCS 12	-62dBm	±2dB
	MCS 13	-58dBm	±2dB
6 GHz 802.11be EHT40	MCS 0	-92dBm	±2dB
	MCS 1	-89dBm	±2dB
	MCS 2	-87dBm	±2dB
	MCS 3	-84dBm	±2dB
	MCS 4	-81dBm	±2dB
	MCS 5	-77dBm	±2dB
	MCS 6	-75dBm	±2dB
	MCS 7	-73dBm	±2dB
	MCS 8	-70dBm	±2dB
	MCS 9	-68dBm	±2dB
	MCS 10	-66dBm	±2dB
	MCS 11	-63dBm	±2dB
	MCS 12	-60dBm	±2dB
	MCS 13	-58dBm	±2dB
6 GHz 802.11be EHT80	MCS 0	-88dBm	±2dB
	MCS 1	-85dBm	±2dB
	MCS 2	-83dBm	±2dB
	MCS 3	-80dBm	±2dB
	MCS 4	-78dBm	±2dB
	MCS 5	-73dBm	±2dB
	MCS 6	-72dBm	±2dB
	MCS 7	-71dBm	±2dB
	MCS 8	-68dBm	±2dB
	MCS 9	-65dBm	±2dB
	MCS 10	-62dBm	±2dB
	MCS 11	-60dBm	±2dB
	MCS 12	-57dBm	±2dB
	MCS 13	-55dBm	±2dB

RF Performance Table for 6 GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
6 GHz 802.11be EHT160	MCS 0	17dBm	20dBm	±2dB
	MCS 1	17dBm	20dBm	±2dB
	MCS 2	17dBm	20dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	15dBm	18dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	14dBm	17dBm	±2dB
	MCS 7	13dBm	16dBm	±2dB
	MCS 8	12dBm	15dBm	±2dB
	MCS 9	11dBm	14dBm	±2dB
	MCS 10	10dBm	13dBm	±2dB
	MCS 11	10dBm	13dBm	±2dB
	MCS 12	9dBm	12dBm	±2dB
	MCS 13	9dBm	12dBm	±2dB
6 GHz 802.11be EHT320	MCS 0	17dBm	20dBm	±2dB
	MCS 1	17dBm	20dBm	±2dB
	MCS 2	17dBm	20dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	15dBm	18dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	14dBm	17dBm	±2dB
	MCS 7	13dBm	16dBm	±2dB
	MCS 8	12dBm	15dBm	±2dB
	MCS 9	11dBm	14dBm	±2dB
	MCS 10	10dBm	13dBm	±2dB
	MCS 11	10dBm	13dBm	±2dB
	MCS 12	9dBm	12dBm	±2dB
	MCS 13	9dBm	12dBm	±2dB


	Data Rate	RX Specifications Sensitivity	Tolerance
6 GHz 802.11be EHT160	MCS 0	-86dBm	±2dB
	MCS 1	-83dBm	±2dB
	MCS 2	-80dBm	±2dB
	MCS 3	-77dBm	±2dB
	MCS 4	-74dBm	±2dB
	MCS 5	-70dBm	±2dB
	MCS 6	-69dBm	±2dB
	MCS 7	-68dBm	±2dB
	MCS 8	-64dBm	±2dB
	MCS 9	-63dBm	±2dB
	MCS 10	-58dBm	±2dB
	MCS 11	-56dBm	±2dB
	MCS 12	-55dBm	±2dB
	MCS 13	-53dBm	±2dB
6 GHz 802.11be EHT320	MCS 0	-82dBm	±2dB
	MCS 1	-80dBm	±2dB
	MCS 2	-78dBm	±2dB
	MCS 3	-75dBm	±2dB
	MCS 4	-72dBm	±2dB
	MCS 5	-68dBm	±2dB
	MCS 6	-67dBm	±2dB
	MCS 7	-66dBm	±2dB
	MCS 8	-63dBm	±2dB
	MCS 9	-61dBm	±2dB
	MCS 10	-55dBm	±2dB
	MCS 11	-53dBm	±2dB
	MCS 12	-52dBm	±2dB
	MCS 13	-51dBm	±2dB

Mechanical Dimensions

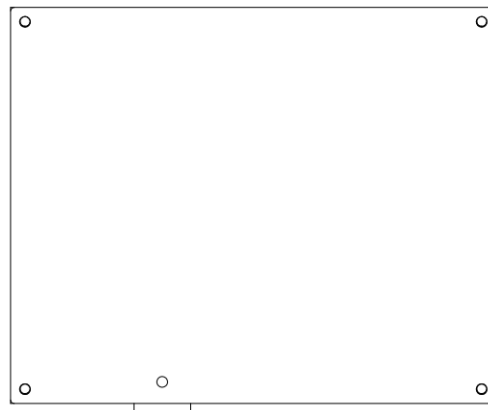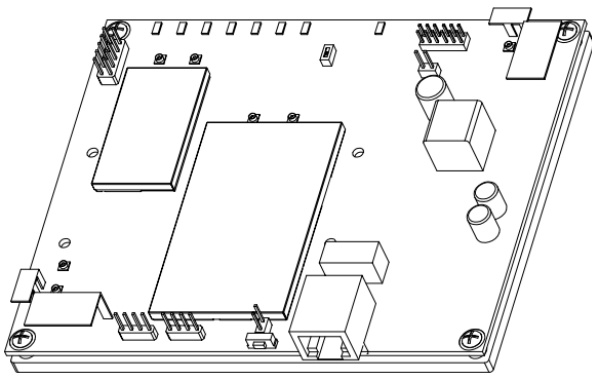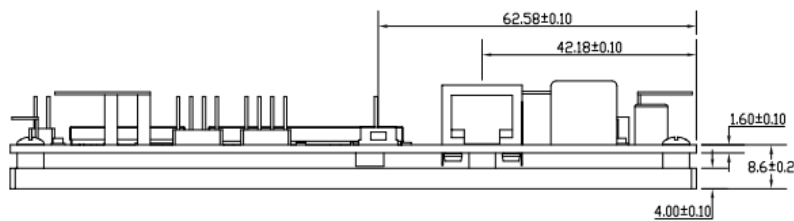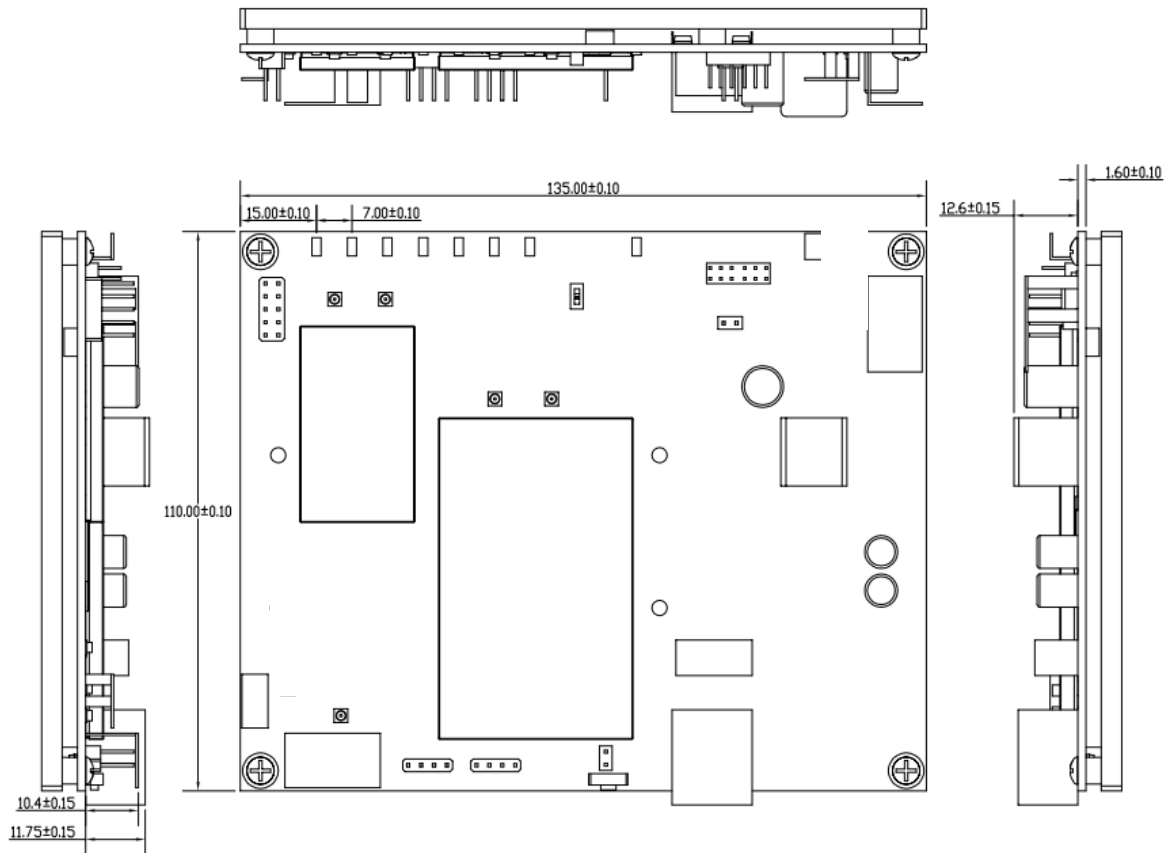

All dimensions are in mm.

Component Map

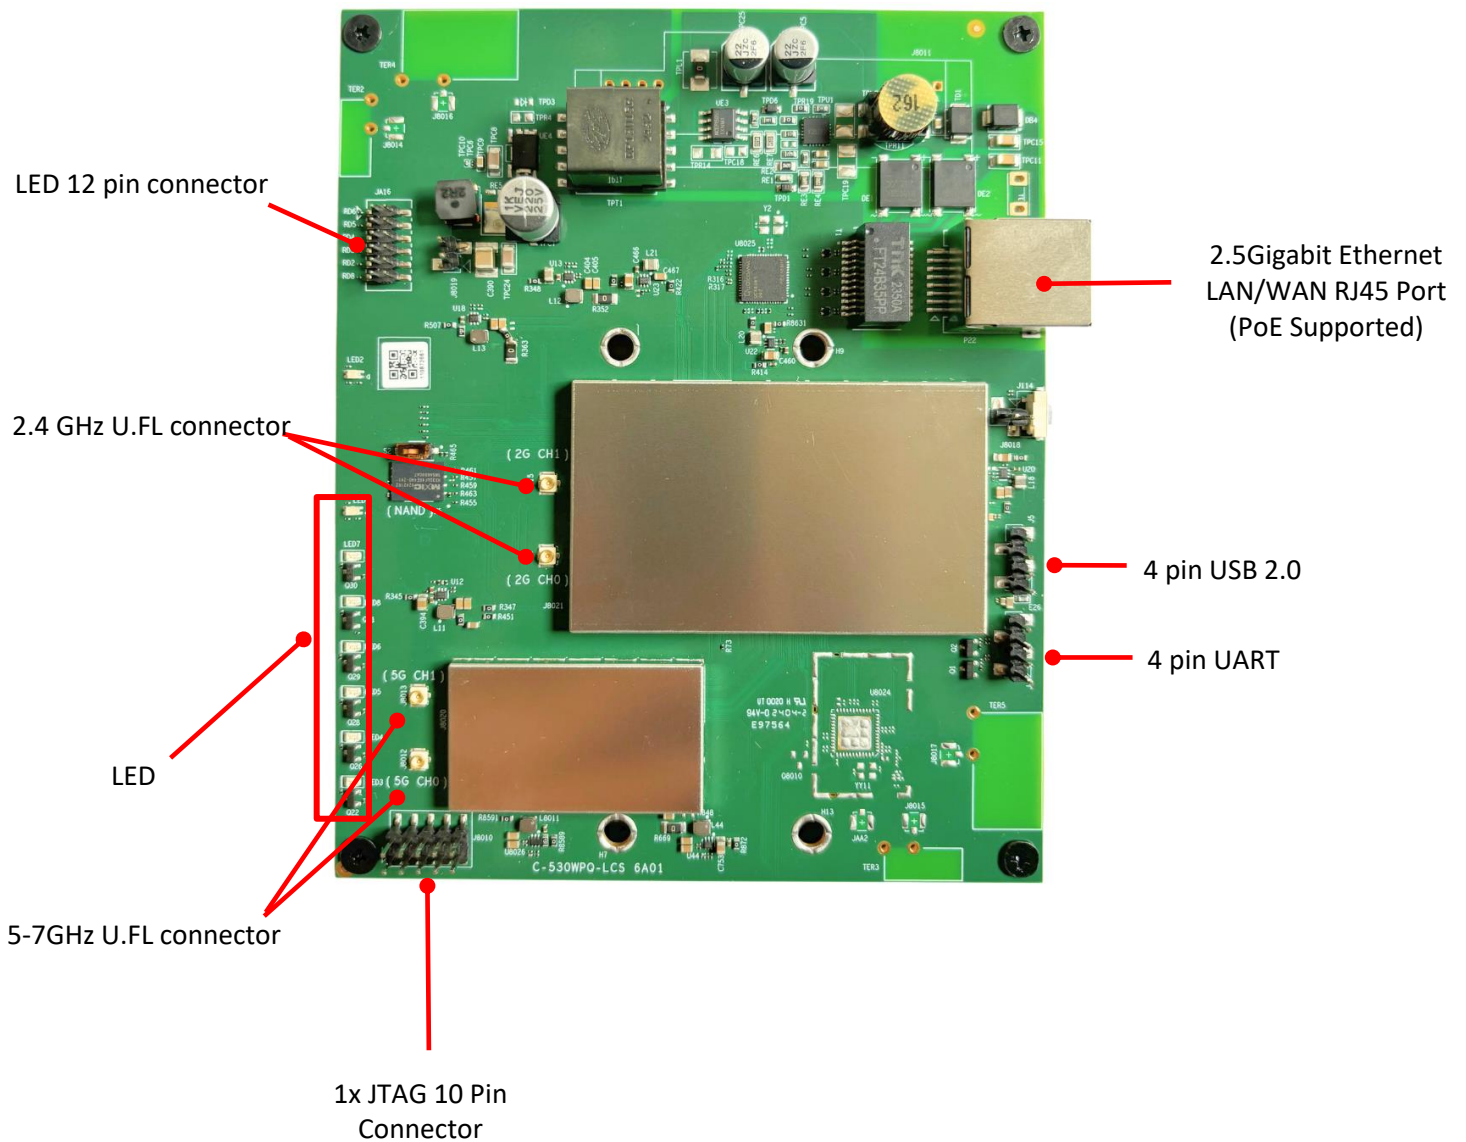

Firmware / Software

Firmware

OpenWrt 23.05

Development Kits

SDK

SDKs with QCA binary drivers are available for software developers.

Accessory

JTAG Programmer, Serial Converter, Power Supply Only if available

Ordering Options

Item Code	Processor	Onboard WiFi	Description
WPQ530 6A01PR8F1GB-TE	IPQ5322	✓	AP mode: Support 2.4GHz and (5GHz or 6GHz) Client mode: Support 2.4GHz and (5GHz-7GHz)
WPQ530 6A01PR8F1GB5H-TE	IPQ5322	✓	AP mode and Client mode: Support 2.4GHz and 5GHz
WPQ530 6A01PR8F1GB6H-TE	IPQ5322	✓	AP mode and Client mode: Support 2.4GHz and 6GHz

For more information on the high-power variants, contact us at sales@compex.com.sg