

: YUhi fYg'

- IEC61000-4-2 (ESD) +/-30kV (air),
+/-30KV(contact)
- IEC61000-4-4 (EFT) 40A (5/50ns)
- IEC61000-4-5 (EOS) (1.2/50uS, 8/20uS)
- Protects one I/O line (bidirectional)
- Working voltages : 3.3V,8V,12V,15V,18V,
24V,36V
- Low leakage current
- ROHS compliant

8 YgW]d]h]cb'

The TSxx01TEX Series are ultra low capacitance transient voltage suppressor arrays, designed to protect applications such as portable electronics and SMART phones.

The TSxx01TEX and Series meets IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT) requirements. At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. This series offers a ultra low capacitance and low leakage current in a miniature SOD323 package.

5 dd`]WU]h]cbg

- Cell Phone Handsets and Accessories
- Microprocessor based equipment
- Personal Digital Assistants (PDA's)
- Notebooks, Desktops, and Servers
- Portable Instrumentation
- Peripherals
- USB Interface

A YW Ub]WU'7\ UFUWYf]gh]Vg


- SOD323 package
- Flammability Rating: UL 94V-0
- Packaging:Tape and Reel
- High temperature soldering guaranteed:260°C/10s
- Reel size: 7 inch

CfXYf]b[`bZcfa U]h]cb

Device: TSxx01TE

- Package: SOD323
- Material: Halogen free
- Packing: Tape & Reel
- Quantity per reel: 3,000pcs

D]b'7 cbZ] i fU]h]cb

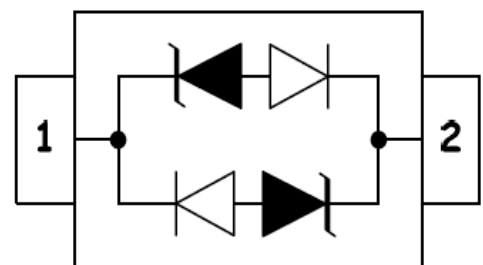

(Top View)




5 Vgc`i h'A U]a i a 'FUhb['

Table with 4 columns: Symbol, Parameter, Value, Units. Rows include V_ESD, T_OPT, T_STG, T_LST.


9`Ywf]WU'7\ UfUWYf]gh]Vg'fH'1'&)°7)

Table with 10 columns: PART NUMBER, DEVICE MARKING, V_RWM, V_B, I_pp, V_c@1A, V_c, I_r, C_t. Rows list various part numbers like TS0301TEX, TS0801TEX, etc.


9`YwfJWJ'7\ UfUMYf]ghjWg'7 i fj Y

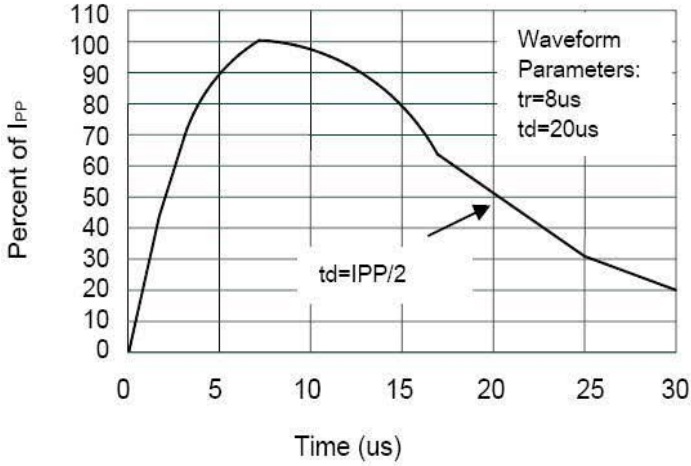

Pulse Waveform

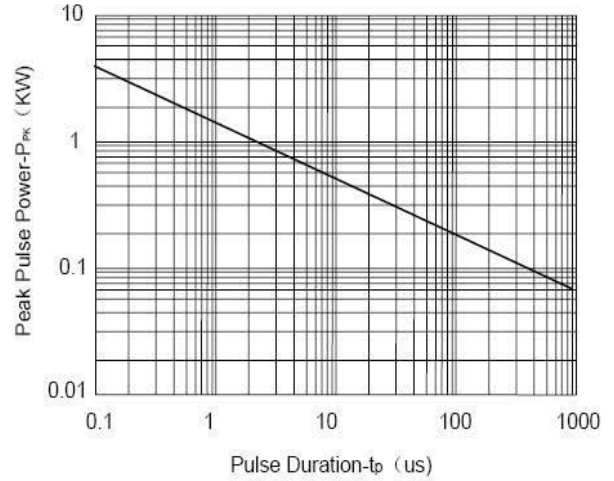

Non-Repetitive Peak Pulse Power vs. Pulse Time

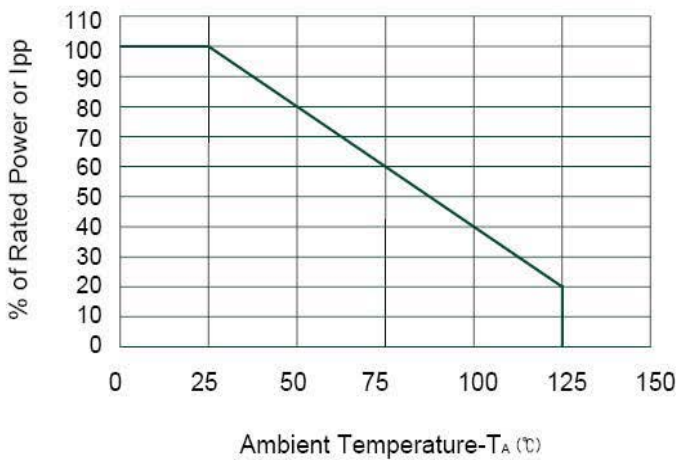

Power Derating Curve



IEC61000-4-5 EOS Test (1.2/50uS, 8/20uS)


TS0301TEX	TS0801TEX	TS1201TEX																																												
<table border="1"> <caption>Approximate data for TS0301TEX</caption> <thead> <tr><th>Current (A)</th><th>Clamping Voltage (V)</th></tr> </thead> <tbody> <tr><td>0</td><td>5.5</td></tr> <tr><td>4</td><td>7.5</td></tr> <tr><td>8</td><td>9.5</td></tr> <tr><td>12</td><td>11.5</td></tr> <tr><td>16</td><td>13.5</td></tr> <tr><td>20</td><td>18.0</td></tr> </tbody> </table>	Current (A)	Clamping Voltage (V)	0	5.5	4	7.5	8	9.5	12	11.5	16	13.5	20	18.0	<table border="1"> <caption>Approximate data for TS0801TEX</caption> <thead> <tr><th>Current (A)</th><th>Clamping Voltage (V)</th></tr> </thead> <tbody> <tr><td>0</td><td>12.0</td></tr> <tr><td>3</td><td>13.5</td></tr> <tr><td>6</td><td>15.0</td></tr> <tr><td>9</td><td>16.5</td></tr> <tr><td>12</td><td>18.0</td></tr> <tr><td>15</td><td>19.0</td></tr> </tbody> </table>	Current (A)	Clamping Voltage (V)	0	12.0	3	13.5	6	15.0	9	16.5	12	18.0	15	19.0	<table border="1"> <caption>Approximate data for TS1201TEX</caption> <thead> <tr><th>Current (A)</th><th>Clamping Voltage (V)</th></tr> </thead> <tbody> <tr><td>0</td><td>17.0</td></tr> <tr><td>4</td><td>18.5</td></tr> <tr><td>8</td><td>20.0</td></tr> <tr><td>12</td><td>22.0</td></tr> <tr><td>14</td><td>24.0</td></tr> </tbody> </table>	Current (A)	Clamping Voltage (V)	0	17.0	4	18.5	8	20.0	12	22.0	14	24.0				
Current (A)	Clamping Voltage (V)																																													
0	5.5																																													
4	7.5																																													
8	9.5																																													
12	11.5																																													
16	13.5																																													
20	18.0																																													
Current (A)	Clamping Voltage (V)																																													
0	12.0																																													
3	13.5																																													
6	15.0																																													
9	16.5																																													
12	18.0																																													
15	19.0																																													
Current (A)	Clamping Voltage (V)																																													
0	17.0																																													
4	18.5																																													
8	20.0																																													
12	22.0																																													
14	24.0																																													
<table border="1"> <caption>Approximate data for TS1501TEX</caption> <thead> <tr><th>Current (A)</th><th>Clamping Voltage (V)</th></tr> </thead> <tbody> <tr><td>0</td><td>20.0</td></tr> <tr><td>2</td><td>21.5</td></tr> <tr><td>4</td><td>23.0</td></tr> <tr><td>6</td><td>24.5</td></tr> <tr><td>8</td><td>26.0</td></tr> <tr><td>10</td><td>28.0</td></tr> </tbody> </table>	Current (A)	Clamping Voltage (V)	0	20.0	2	21.5	4	23.0	6	24.5	8	26.0	10	28.0	<table border="1"> <caption>Approximate data for TS1801TEX</caption> <thead> <tr><th>Current (A)</th><th>Clamping Voltage (V)</th></tr> </thead> <tbody> <tr><td>0</td><td>26.0</td></tr> <tr><td>2</td><td>28.0</td></tr> <tr><td>4</td><td>30.0</td></tr> <tr><td>6</td><td>33.0</td></tr> <tr><td>8</td><td>35.0</td></tr> </tbody> </table>	Current (A)	Clamping Voltage (V)	0	26.0	2	28.0	4	30.0	6	33.0	8	35.0	<table border="1"> <caption>Approximate data for TS2401TEX</caption> <thead> <tr><th>Current (A)</th><th>Clamping Voltage (V)</th></tr> </thead> <tbody> <tr><td>0</td><td>33.0</td></tr> <tr><td>1</td><td>34.5</td></tr> <tr><td>2</td><td>36.0</td></tr> <tr><td>3</td><td>37.5</td></tr> <tr><td>4</td><td>39.0</td></tr> <tr><td>5</td><td>41.0</td></tr> <tr><td>6</td><td>43.0</td></tr> <tr><td>7</td><td>45.0</td></tr> </tbody> </table>	Current (A)	Clamping Voltage (V)	0	33.0	1	34.5	2	36.0	3	37.5	4	39.0	5	41.0	6	43.0	7	45.0
Current (A)	Clamping Voltage (V)																																													
0	20.0																																													
2	21.5																																													
4	23.0																																													
6	24.5																																													
8	26.0																																													
10	28.0																																													
Current (A)	Clamping Voltage (V)																																													
0	26.0																																													
2	28.0																																													
4	30.0																																													
6	33.0																																													
8	35.0																																													
Current (A)	Clamping Voltage (V)																																													
0	33.0																																													
1	34.5																																													
2	36.0																																													
3	37.5																																													
4	39.0																																													
5	41.0																																													
6	43.0																																													
7	45.0																																													
<p>TS3601TEX</p>																																														
<table border="1"> <caption>Approximate data for TS3601TEX</caption> <thead> <tr><th>Current (A)</th><th>Clamping Voltage (V)</th></tr> </thead> <tbody> <tr><td>0</td><td>45.0</td></tr> <tr><td>1</td><td>46.5</td></tr> <tr><td>2</td><td>48.0</td></tr> <tr><td>3</td><td>49.5</td></tr> <tr><td>4</td><td>51.0</td></tr> <tr><td>5</td><td>53.0</td></tr> <tr><td>6</td><td>55.0</td></tr> </tbody> </table>	Current (A)	Clamping Voltage (V)	0	45.0	1	46.5	2	48.0	3	49.5	4	51.0	5	53.0	6	55.0																														
Current (A)	Clamping Voltage (V)																																													
0	45.0																																													
1	46.5																																													
2	48.0																																													
3	49.5																																													
4	51.0																																													
5	53.0																																													
6	55.0																																													

Package Outline


- SOD323 package



Package Outline Dimensions

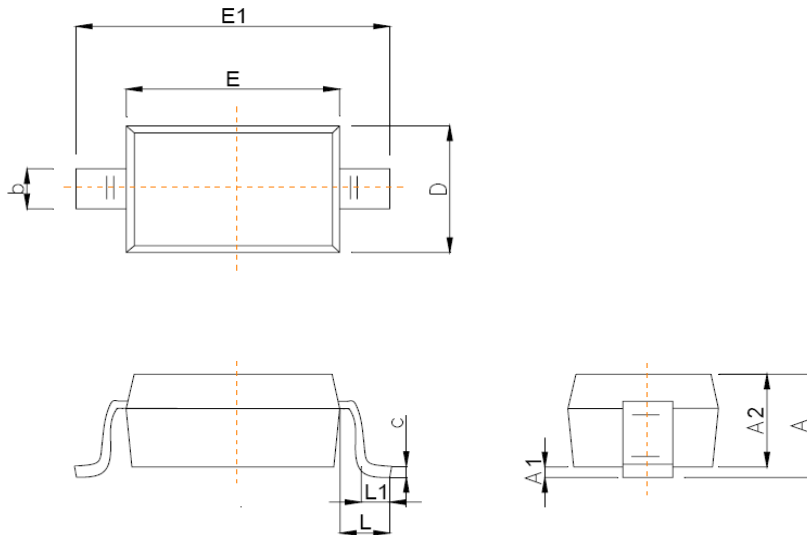


Symbol	Dimensions In Millimeters	
	Min	Max
A		1.00
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
e	1.800	2.040
L	0.475 REF	
L1	0.250	0.400
θ	0°	8°

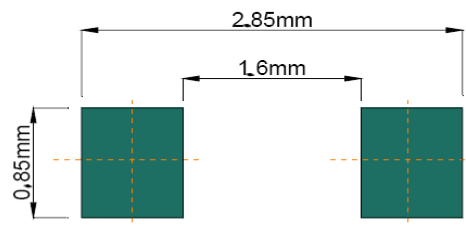

Recommended Pad outline


P.S. TSxx01TE series are the bidirectional TVS. The device marking is directionless. Then the device orientation in tape is not requested.

Tape and Reel Specification

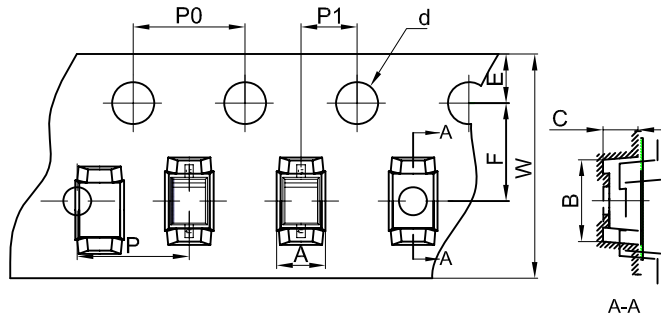


Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOD-323	1.46	2.90	1.25	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
(Tolerance)	+/-0.05	+/-0.05	+/-0.05	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+0.3/-0.1

SOD-323 Tape Leader and Trailer

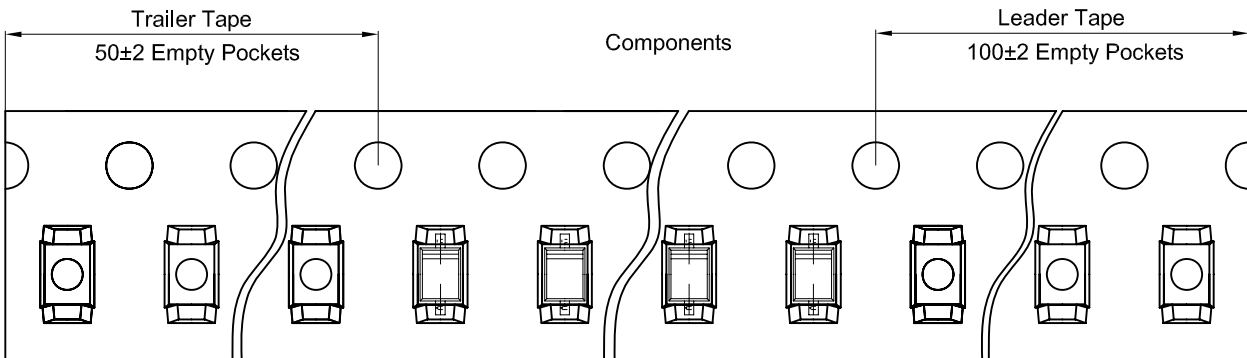

SOD-323 Reel

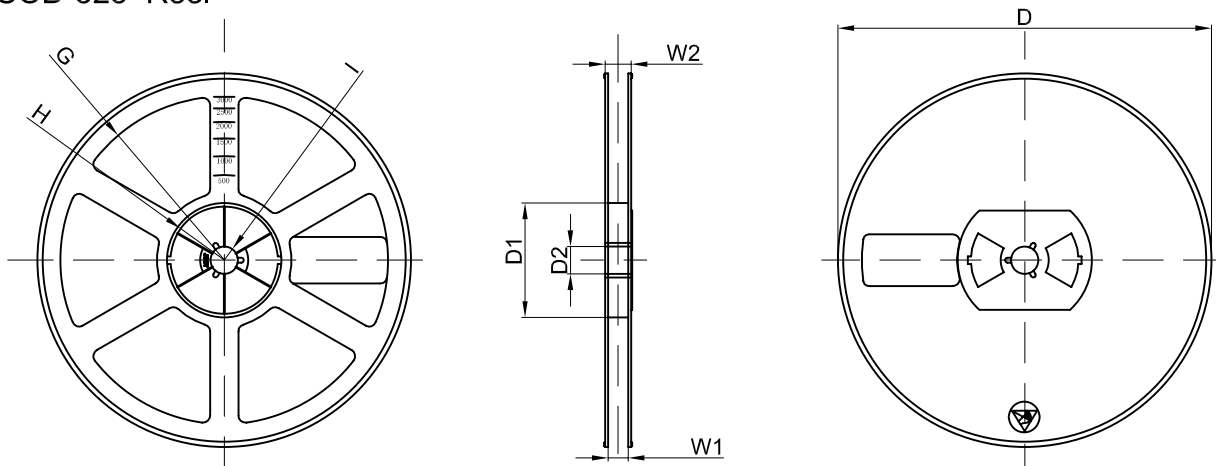

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30
Tolerance	+/-2	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×220	