

General Description:

The LW3134ADA uses trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications. The package form is DFN1006-3L, which accords with the ROHS standard and Halogen Free standard.

Features:

- Fast Switching
- Low Gate Charge and $R_{DS(ON)}$
- Low Reverse transfer capacitances
- ESD Rating: HBM $\geq 1000V$

Applications:

- DC-DC Converter
- Portable Equipment
- Power Management




V_{DSS}	20	V
I_D	1.0	A
P_D	0.35	W
$R_{DS(ON)}$ TYPE	150	m Ω

Marking and Pin Assignment



Inner Equivalent Principium Chart



Package Marking and Ordering Information:

Marking	Part Number	Package	Packing	Qty.
A** ^(a1)	LW3134ADA	DFN1006-3L	Reel	10000 Pcs

Absolute Maximum Ratings:

Symbol	Parameter		Value	Units
V_{DSS}	Drain-to-Source Voltage		20	V
I_D	Continuous Drain Current	$T_A=25^{\circ}C$	1.0	A
	Continuous Drain Current	$T_A=100^{\circ}C$	0.6	A
I_{DM}^{a2}	Pulsed Drain Current		4.0	A
V_{GS}	Gate-to-Source Voltage		± 10	V
P_D	Power Dissipation		0.35	W
T_J, T_{STG}	Operating Junction and Storage Temperature Range		150, -55 to 150	$^{\circ}C$
T_L	Maximum Temperature for Soldering		260	$^{\circ}C$

Thermal Characteristics:

Symbol	Parameter	Value	Units
$R_{\theta JA}^{a3}$	Thermal Resistance, Junction-to-Ambient	357	$^{\circ}C/W$

Electrical Characteristic ($T_J = 25\text{ }^{\circ}\text{C}$, unless otherwise specified):

Static Characteristics						
Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
V_{DSS}	Drain to Source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	20	--	--	V
I_{DSS}	Drain to Source Leakage Current	$V_{DS}=20V, V_{GS}=0V$	--	--	1.0	μA
$I_{GSS(F)}$	Gate to Source Forward Leakage	$V_{GS}=+10V, V_{DS}=0V$	--	--	5.0	μA
$I_{GSS(R)}$	Gate to Source Reverse Leakage	$V_{GS}=-10V, V_{DS}=0V$	--	--	-5.0	μA
$V_{GS(TH)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	0.45	0.65	1.0	V
$R_{DS(ON)1}$	Drain-to-Source On-Resistance	$V_{GS}=4.5V, I_D=0.5A$	--	150	200	$m\Omega$
$R_{DS(ON)2}$	Drain-to-Source On-Resistance	$V_{GS}=2.5V, I_D=0.3A$	--	185	300	$m\Omega$
$R_{DS(ON)3}$	Drain-to-Source On-Resistance	$V_{GS}=1.8V, I_D=0.3A$	--	310	500	$m\Omega$

Dynamic Characteristics						
Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
C_{iss}	Input Capacitance	$V_{GS}=0V$	--	45	--	pF
C_{oss}	Output Capacitance	$V_{DS}=10V$	--	11.6	--	
C_{rss}	Reverse Transfer Capacitance	$f=1.0MHz$	--	8.2	--	
R_G	Gate resistance	$V_{GS}=0V, V_{DS}=0V, f=1MHz$	--	20	--	Ω



Resistive Switching Characteristics						
Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
$t_{d(ON)}$	Turn-on Delay Time	$I_D=0.5A$	--	3	--	ns
t_r	Rise Time	$V_{DS}=10V$	--	12	--	
$t_{d(OFF)}$	Turn-Off Delay Time	$V_{GS}=4.5V$	--	15	--	
t_f	Fall Time	$R_G=3.0\Omega$	--	21	--	
Q_g	Total Gate Charge	$V_{GS}=4.5V$	--	1.4	--	nC
Q_{gs}	Gate to Source Charge	$V_{DS}=10V$	--	0.28	--	
Q_{gd}	Gate to Drain Charge	$I_D=1.2A$	--	0.46	--	



Source-Drain Diode Characteristics						
Symbol	Parameter	Test Conditions	Value			Units
			Min.	Typ.	Max.	
I_S	Diode Forward Current	$T_A=25\text{ }^{\circ}\text{C}$	--	--	1.0	A
V_{SD}	Diode Forward Voltage	$I_S=0.5A, V_{GS}=0V$	--	--	1.2	V

a1: ** is defined as date code

a2: Repetitive rating; pulse width limited by maximum junction temperature

a3: Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection.

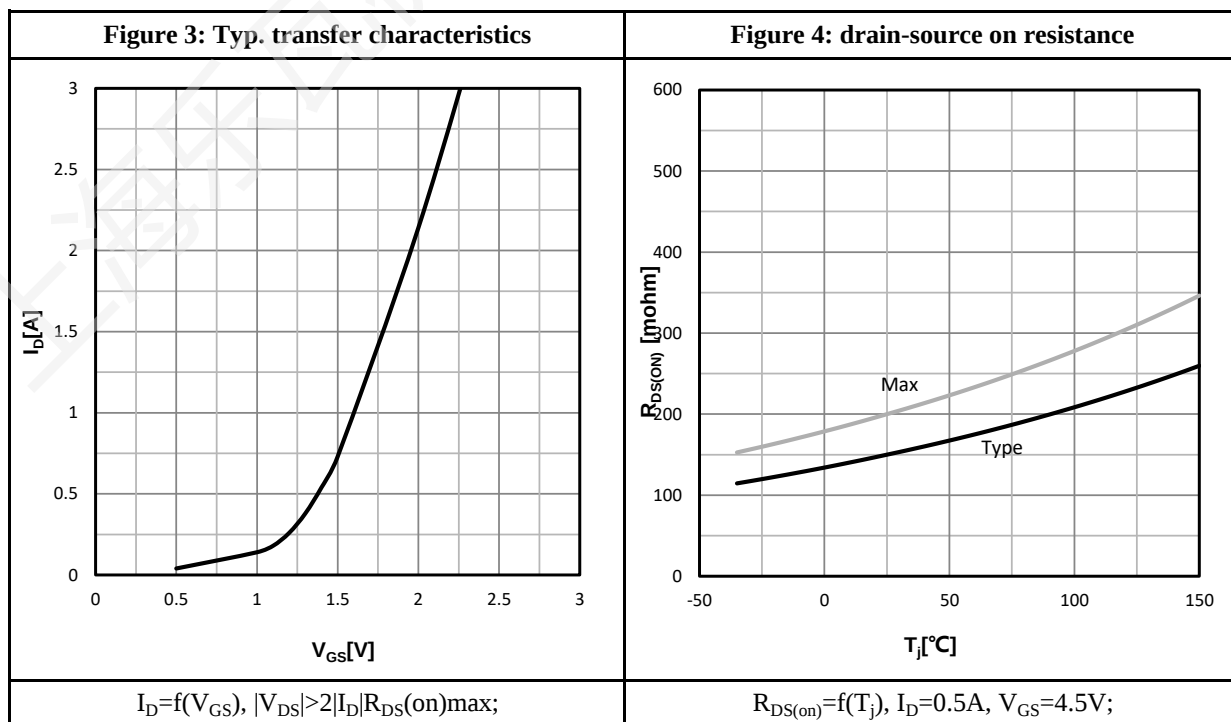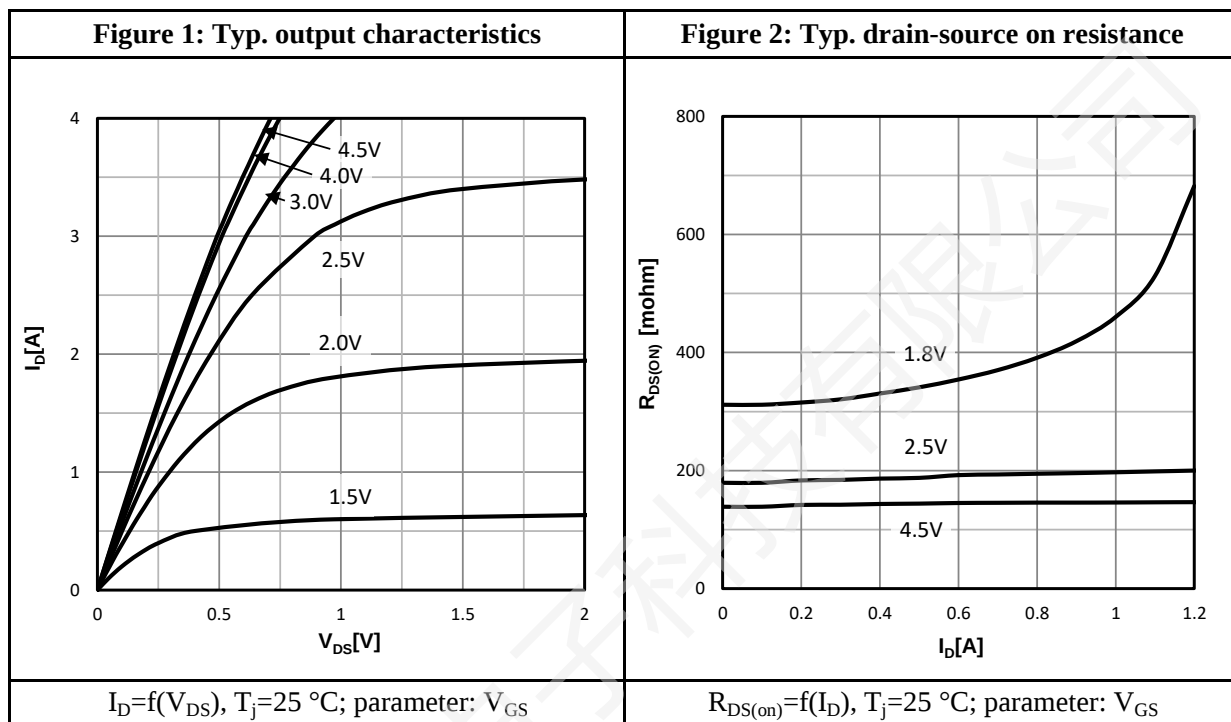Characteristics Curve:

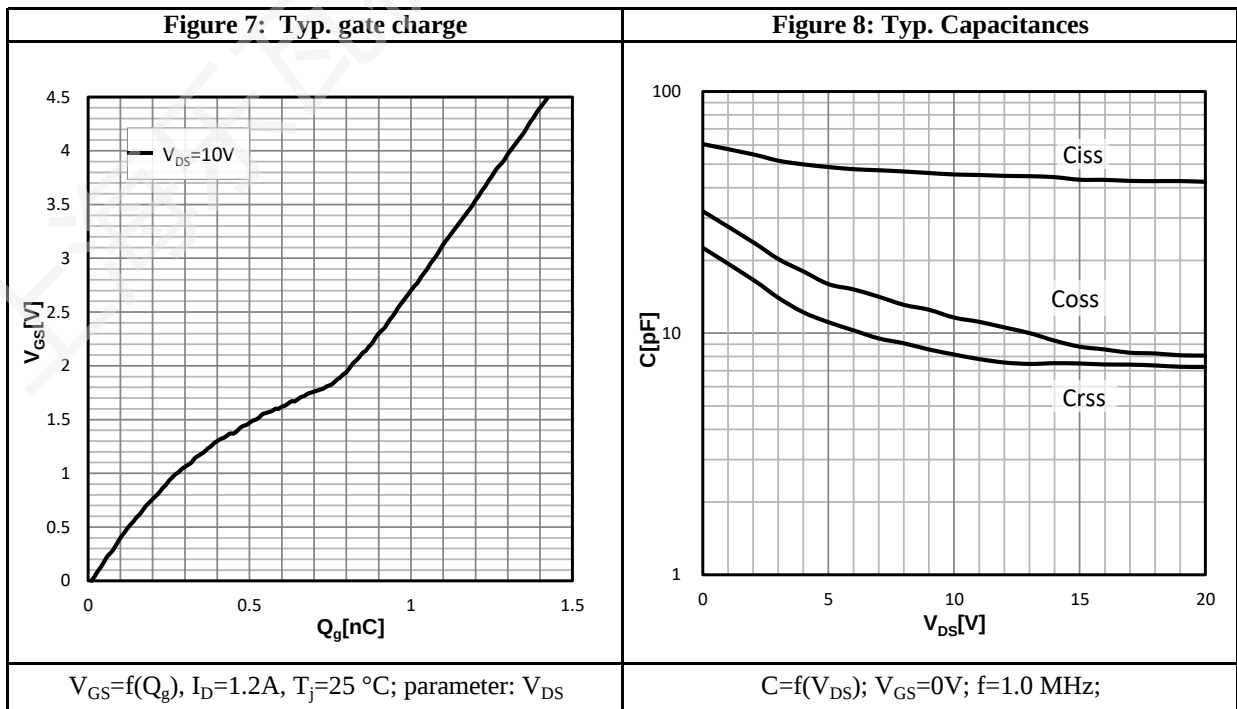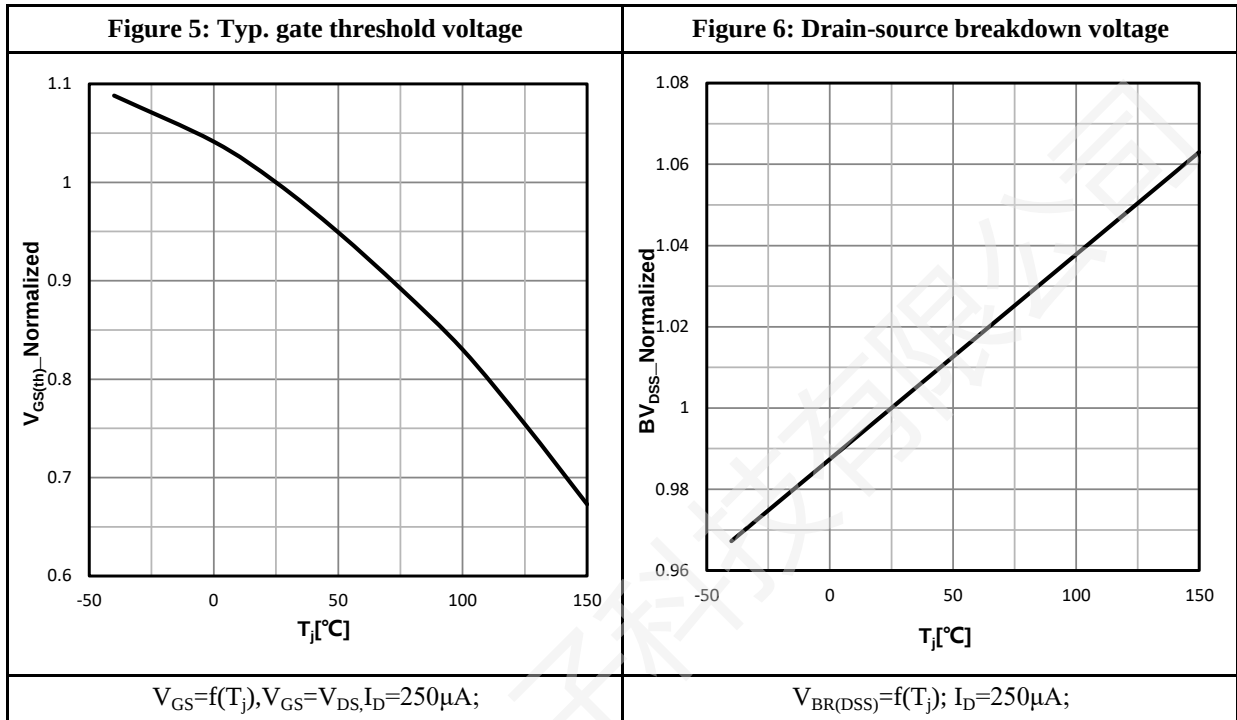


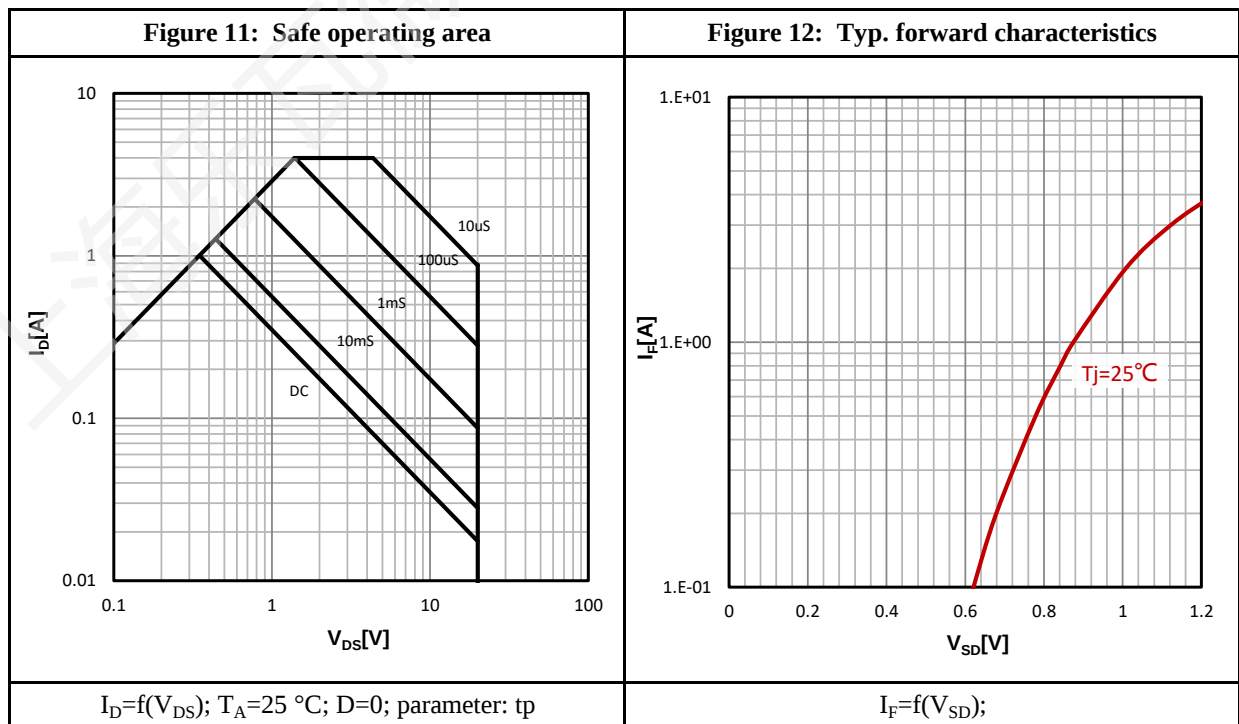
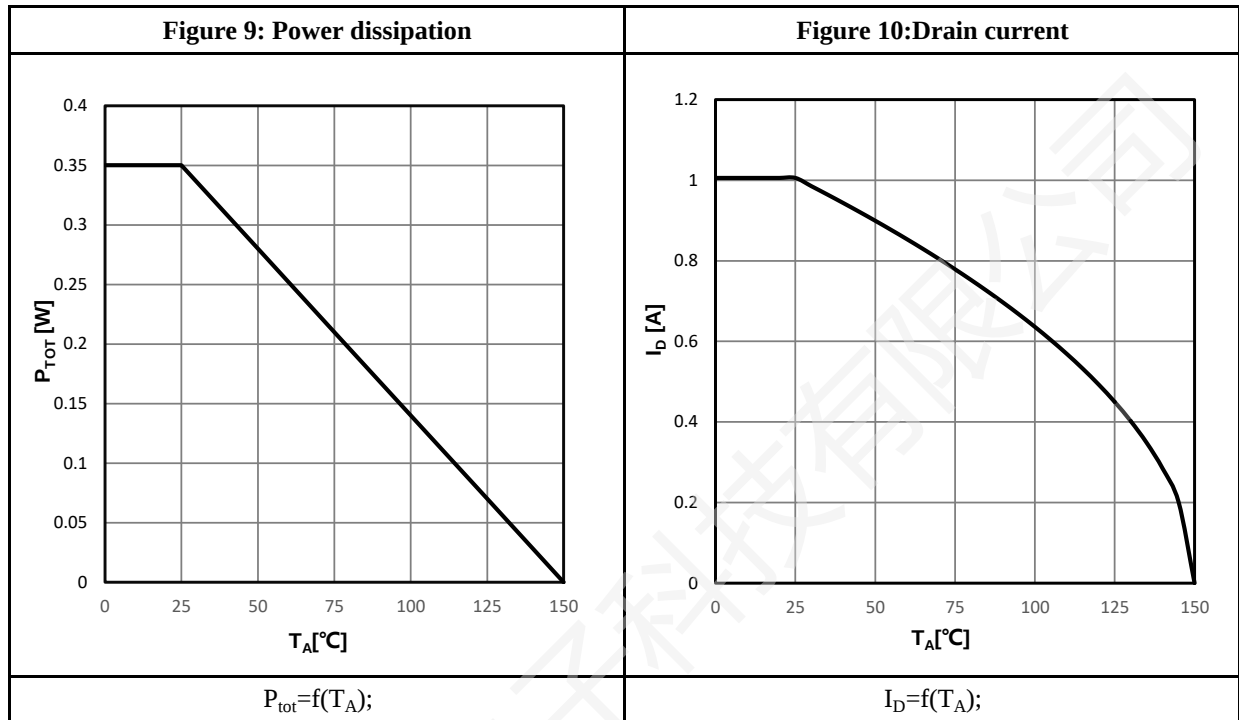
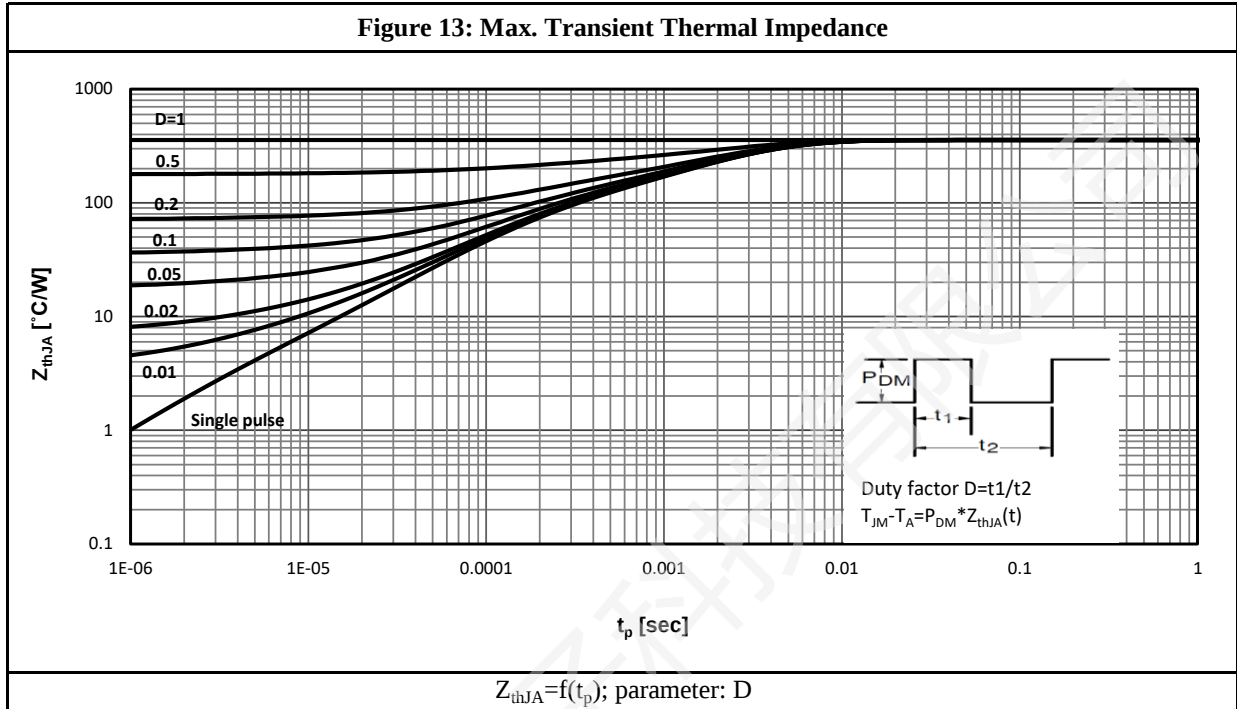
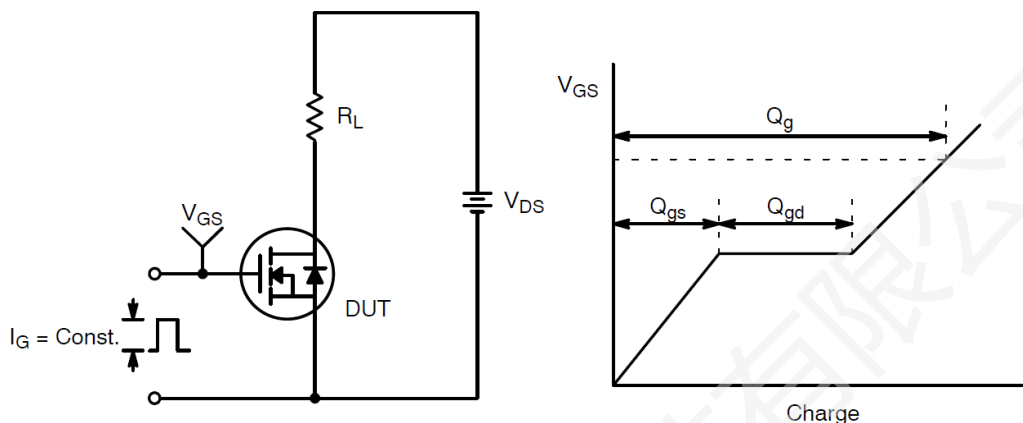
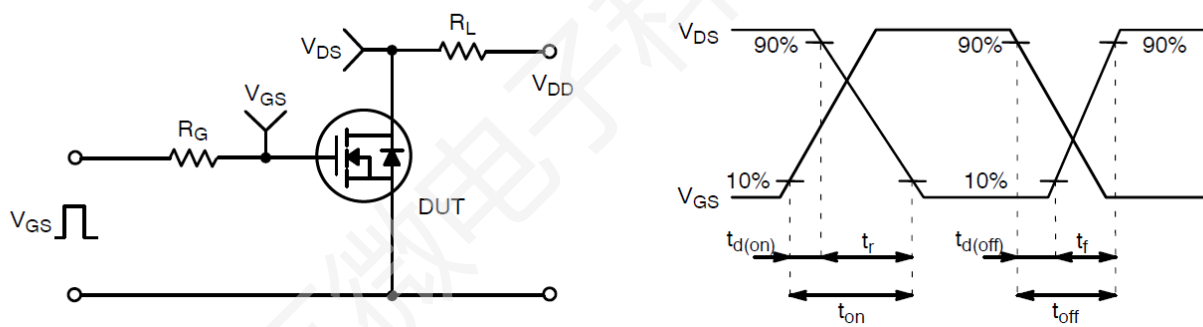
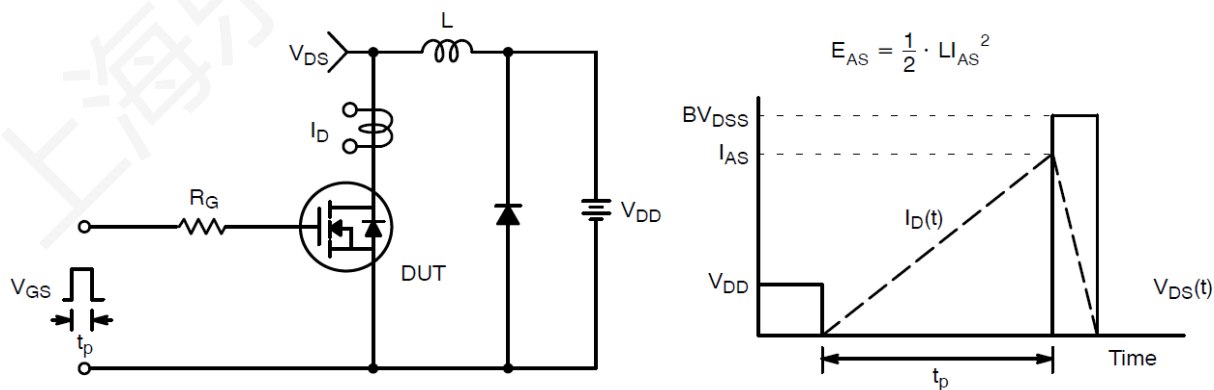
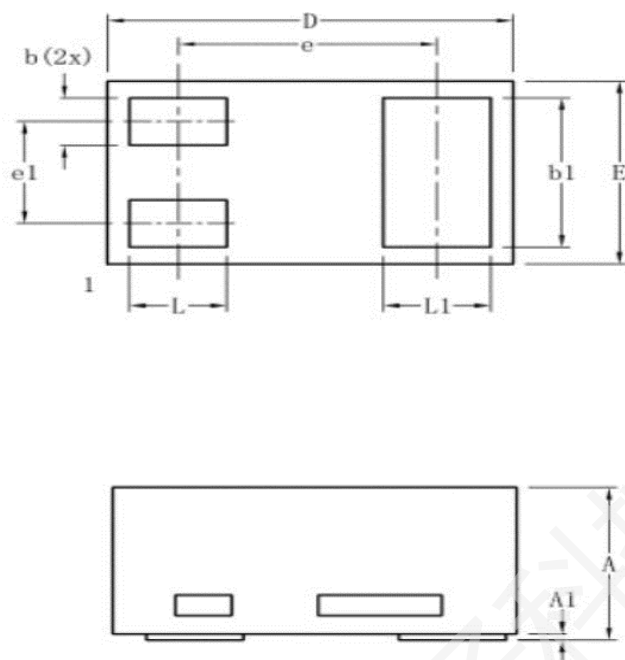


Figure 13: Max. Transient Thermal Impedance


Test Circuit & Waveform:

Figure 14: Gate Charge Test Circuit & Waveform

Figure 15: Resistive Switching Test Circuit & Waveforms

Figure 16: Unclamped Inductive Switching Test Circuit & Waveforms

Package Outline:


COMMON DIMENSION (MM)			
Symbol	MIN	NOM	MAX
A	0.450	0.500	0.550
A1	0.000	0.020	0.060
b	0.100	0.150	0.200
b1	0.440	0.500	0.560
D	0.950	1.000	1.050
e1	0.300	0.350	0.400
e	0.600	0.650	0.700
E	0.550	0.600	0.650
L/L1	0.200	0.250	0.300

Revision History:

Revison	Date	Descriptions
Rev 1.1	Sep.2024	Initial Version

Disclaimer:

- The product is not intended for use in applications that require extraordinary levels of quality and reliability, such as military, aviation/aerospace and life-support systems or other applications whose failure can be reasonably expected to result in serious physical or material damage.
- Lewa-Micro assumes no responsibility for equipment failures that result from using products at parameters that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any Lewa-Micro products described or contained herein.
- Specifications of any and all Lewa-Micro products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- Lewa-Micro strives to supply high-quality and high-reliability products. However, any and all semiconductor products have a certain probability of failure. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures including but not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- To comply with the compliance requirements of relevant export control laws and regulations, if any Lewa-Micro product (including technical data and services) stated herein is subject to relevant export control laws and regulations, it is recommended that the customer apply for and obtain an export license from the competent authority in advance in accordance with the requirements of relevant laws, and do not conduct export activities without obtaining the license. If the customer fails to comply with the aforementioned compliance requirements, all legal liabilities arising therefrom shall be borne solely by the customer.
- To protect Lewa-Micro's intellectual property rights and the security of commercial information, without the prior written permission of Lewa-Micro, no part of this document shall be reproduced or disseminated in any form or by any means (including photocopying, recording, and other electronic or mechanical means, as well as various information storage and retrieval systems). For unauthorized reproduction or dissemination, Lewa-Micro reserves the right to pursue legal liability.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Lewa-Micro believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc.

Mailing Address: Unit 02&04&05, 10th Floor, Building 5, No.666 Shengxia Road, No.122 Yindong Road,
China (Shanghai) Pilot Free Trade Zone
Shanghai Lewa Micro-electronics Technology Co., Ltd