

Description


STGP19NC60KD is obtained by advanced Trench Field Stop (T-FS) technology which is characteristic with low $V_{CE(sat)}$, optimized switching performance and low gate charge Q_g . The IGBT is suitable device for UPS, PFC, Photovoltaic Inverter and Chargers applications.

General Features

- ① 650V Breakdown Voltage
- ② Fast Switching
- ③ Low $V_{CE(sat)}$, typ=1.55V@ $I_C=20A$
- ④ Positive temperature coefficient
- ⑤ Fast recovery anti-parallel diode
- ⑥ RoHS product

Application

- ① Photovoltaic converters
- ② UPS
- ③ PFC
- ④ Motor driver

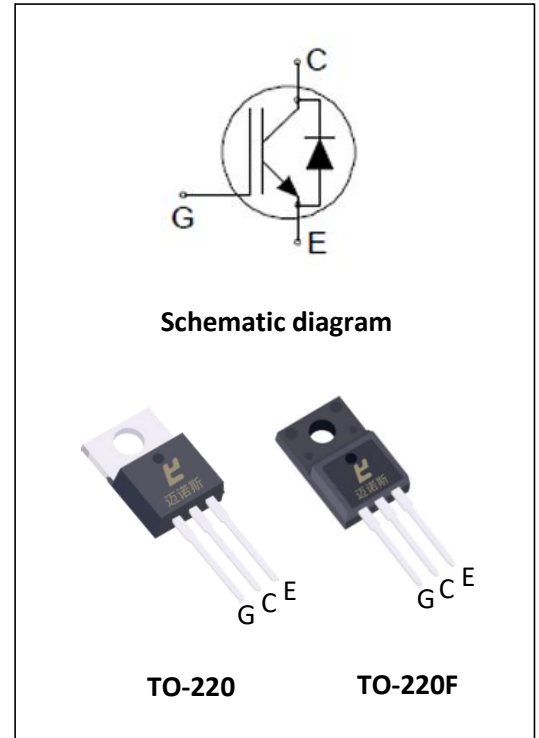

Package Marking And Ordering Information:

Ordering Codes	Package	Product Code	Packing
STGF19NC60KD	TO-220F	GF19NC60KD	Tube
STGP19NC60KD	TO-220	GP19NC60KD	Tube

Absolute Maximum Ratings:

Symbol	Parameter	TO-220	TO-220F	Units
V_{CES}	Collector-Emitter Voltage	650	650	V
I_C	Collector Current @ $T_C=25^\circ C$	40	40	A
	Collector Current @ $T_C=100^\circ C$	20	20	A
I_{CM}	Pulsed Collector Current, tp limited by T_{Jmax}	80	80	A
I_F	Diode Continuous Forward Current @ $T_C=25^\circ C$	20	20	A
	Diode Continuous Forward Current @ $T_C=100^\circ C$	10	10	A
I_{FM}	Diode Maximum Forward Current, limited by T_{Jmax}	40	40	A
V_{GES}	Gate-Emitter Voltage	± 30		V
t_{SC}	Short circuit withstand time $V_{GE}=15V, V_{CC} \leq 400V$, Allowed number of short circuits < 1000, Times between short circuits: $\geq 1.0s, T_J \leq 175^\circ C$	3.0		μs
P_D	Power Dissipation @ $T_C=25^\circ C$	136	39	W

T_{Jmax}, T_{stg}	Operating Junction and Storage Temperature Range	175, -55 to 175	°C
T_L	Maximum Temperature for Soldering	260	°C

Thermal characteristics

Symbol	Parameter	TO-220	TO-220F	Units
$R_{\theta JC}$	Junction-to-Case (IGBT)	1.1	3.6	°C/W
$R_{\theta JC}$	Junction-to-Case (Diode)	1.8	3.6	°C/W
$R_{\theta JA}$	Junction-to-Ambient	62.5	78	°C/W

Electrical Characteristics (at $T_c = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
V_{CES}	Collector-Emitter Breakdown Voltage	$V_{GE} = 0V, I_C = 250\mu A$	650	--	--	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$V_{GE} = 15V, I_C = 20A$ $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ $T_J = 175^\circ\text{C}$	-- -- --	1.55 1.80 1.90	1.95 -- --	V
$V_{GE(TH)}$	Gate Threshold Voltage	$V_{CE} = V_{GE}, I_C = 1mA$	5.0	5.8	6.5	V
V_F	Diode Forward Voltage	$I_F = 10A, T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ $T_J = 175^\circ\text{C}$	-- -- --	2.15 1.95 1.85	2.70 -- --	V
I_{CES}	Collector-Emitter Leakage Current	$V_{CE} = 650V, V_{GE} = 0V$	--	--	25	μA
$I_{GES(F)}$	Gate-Emitter Forward Leakage Current	$V_{GE} = +30V$	--	--	200	nA
$I_{GES(R)}$	Gate-Emitter Reverse Leakage Current	$V_{GE} = -30V$	--	--	-200	nA

Pulse width $t_p \leq 300\mu s, \delta \leq 2\%$

Dynamic Characteristics

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
C_{iss}	Input Capacitance	$V_{GE} = 0V, V_{CE} = 25V, f = 1.0MHz$	--	892	--	pF
C_{oss}	Output Capacitance		--	43	--	
C_{rss}	Reverse Transfer Capacitance		--	10	--	
Q_G	Gate charge	$V_{CC} = 520V, I_{CE} = 20A, V_{GE} = 15V$	--	44	--	nC
Q_{GC}	Gate-emitter charge		--	13	--	
Q_{GE}	Gate-collector charge		--	18	--	

$I_{C(SC)}$	Short circuit collector current Max.1000 short circuits, Times between short circuits: $\geq 1.0s$	$V_{GE}=15.0V, V_{CE}\leq 400V$ $t_{sc}\leq 3\mu s, T_J\leq 175^\circ C$	--	110	--	A
-------------	--	---	----	-----	----	---

IGBT Switching Characteristics(at $T_J=25^\circ C$)

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$t_{d(on)}$	Turn-on Delay Time	$I_C=20A$ $V_{CE}=400V$ $V_{GE}=15V$ $R_G=5\Omega$ $T_J=25^\circ C$ Inductive Load	--	12	--	ns
t_r	Rise Time		--	17	--	
$t_{d(off)}$	Turn-Off Delay Time		--	136	--	
t_f	Fall Time		--	36	--	
E_{on}	Turn-On Switching Loss		--	0.28	--	mJ
E_{off}	Turn-Off Switching Loss		--	0.28	--	
E_{ts}	Total Switching Loss		--	0.56	--	

IGBT Switching Characteristics(at $T_J=175^\circ C$)

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
$t_{d(on)}$	Turn-on Delay Time	$I_C=20A$ $V_{CE}=400V$ $V_{GE}=15V$ $R_G=5\Omega$ $T_J=175^\circ C$ Inductive Load	--	12	--	ns
t_r	Rise Time		--	17	--	
$t_{d(off)}$	Turn-Off Delay Time		--	158	--	
t_f	Fall Time		--	90	--	
E_{on}	Turn-On Switching Loss		--	0.44	--	mJ
E_{off}	Turn-Off Switching Loss		--	0.38	--	
E_{ts}	Total Switching Loss		--	0.82	--	

Diode Characteristics(at $T_J=25^\circ C$)

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
T_{rr}	Reverse Recovery Time	$I_F=10A,$ $di/dt=200A/\mu s,$ $T_J=25^\circ C$	--	66	--	ns
Q_{rr}	Reverse Recovery Charge		--	182	--	nC
I_{rrm}	Reverse Recovery Current		--	4.5	--	A
T_{rr}	Reverse Recovery Time	$I_F=20A,$ $di/dt=200A/\mu s,$ $T_J=25^\circ C$	--	75	--	ns
Q_{rr}	Reverse Recovery Charge		--	236	--	nC
I_{rrm}	Reverse Recovery Current		--	5.4	--	A

Diode Characteristics(at $T_J=175^{\circ}\text{C}$)

Symbol	Parameter	Test Conditions	Values			Units
			Min.	Typ.	Max.	
T_{rr}	Reverse Recovery Time	$I_F=10\text{A}$, $di/dt=200\text{A}/\mu\text{s}$, $T_J=175^{\circ}\text{C}$	--	122	--	ns
Q_{rr}	Reverse Recovery Charge		--	690	--	nC
I_{rrm}	Reverse Recovery Current		--	10	--	A
T_{rr}	Reverse Recovery Time	$I_F=20\text{A}$, $di/dt=200\text{A}/\mu\text{s}$, $T_J=175^{\circ}\text{C}$	--	150	--	ns
Q_{rr}	Reverse Recovery Charge		--	910	--	nC
I_{rrm}	Reverse Recovery Current		--	11	--	A

Characteristics Curves

Figure 1. Forward Bias Safe Operating Area for TO220

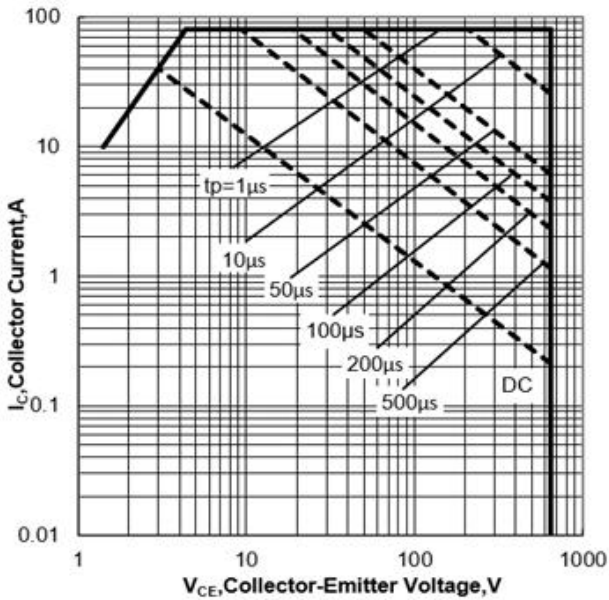


Figure 2. Forward Bias Safe Operating Area for TO220F

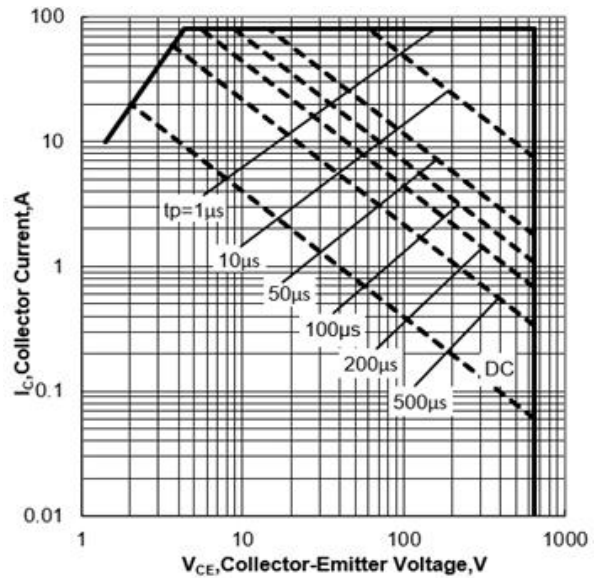


Figure 3. Power Dissipation vs Case Temperature for TO220

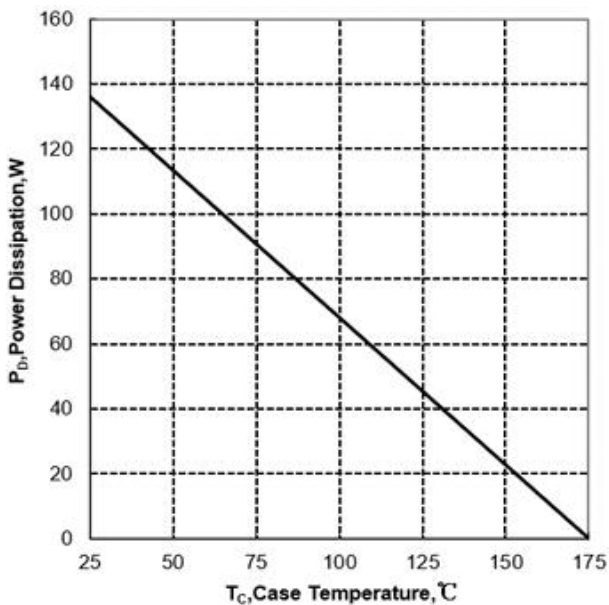


Figure 4. Power Dissipation vs Case Temperature for TO220F

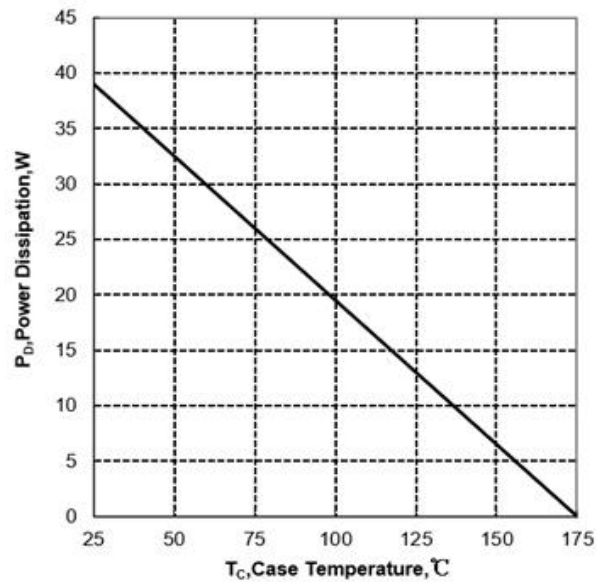


Figure 5. Collector Current vs Case Temperature for TO220

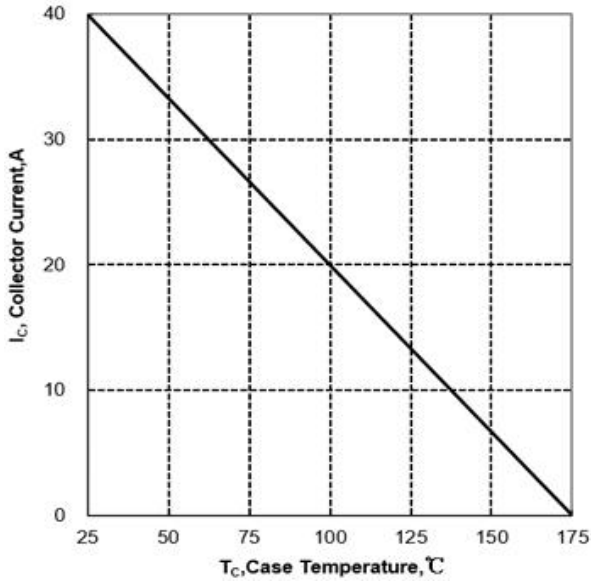


Figure 6. Collector Current vs Case Temperature for TO220F

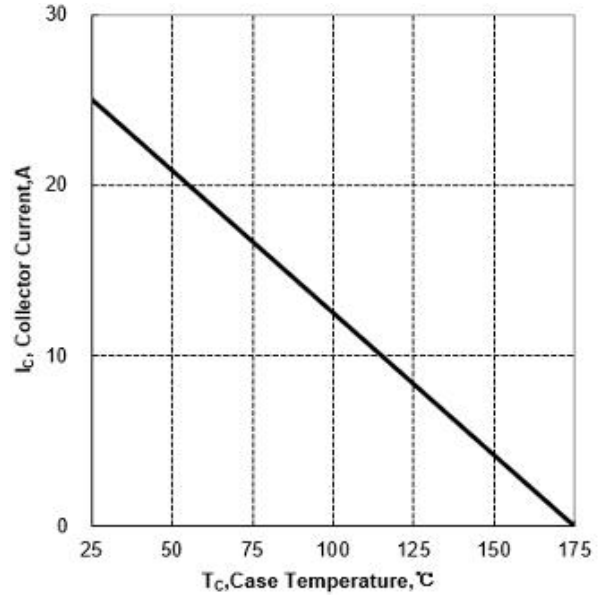


Figure 7. Typical Output Characteristics ($T_J=25^\circ\text{C}$)

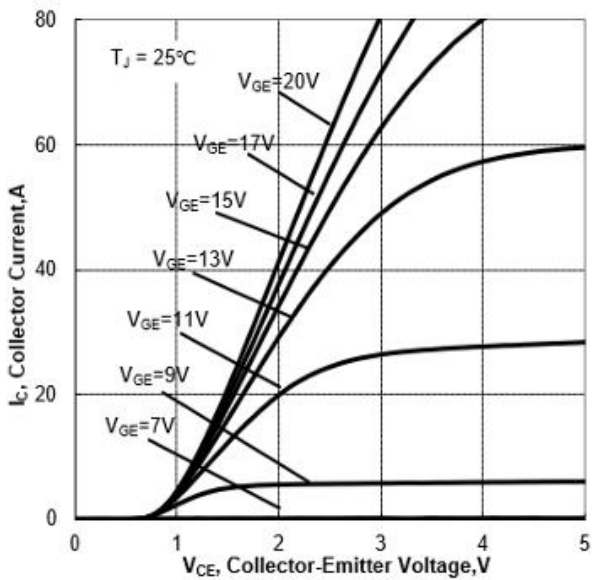


Figure 8. Typical Output Characteristics ($T_J=175^\circ\text{C}$)

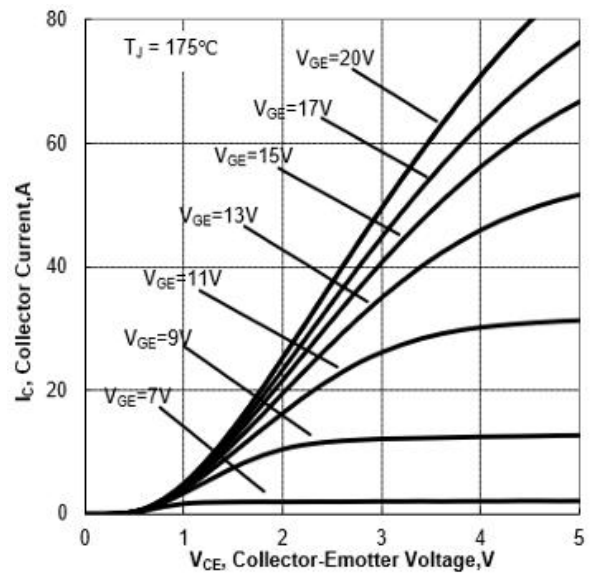


Figure 9. Typical Transfer Characteristics

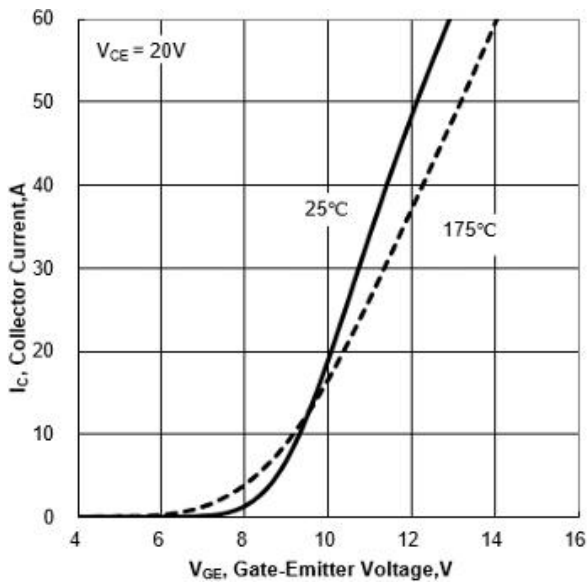


Figure 10. Typical Gate-Emitter Threshold Voltage vs Junction Temperature

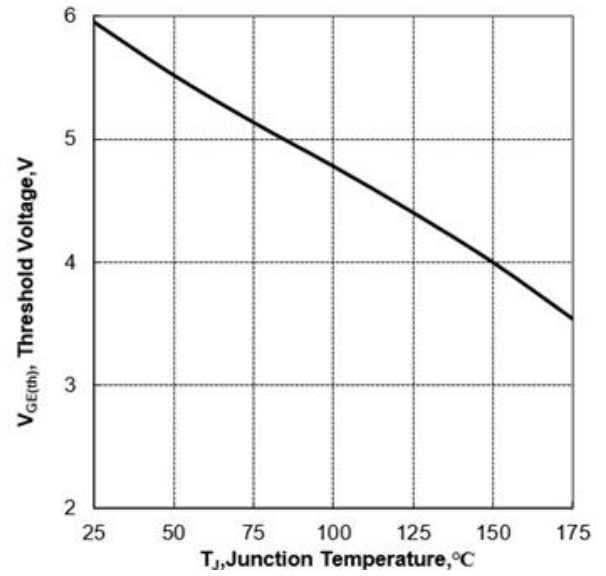


Figure 11. Typical Collector-Emitter Saturation Voltage vs Junction Temperature

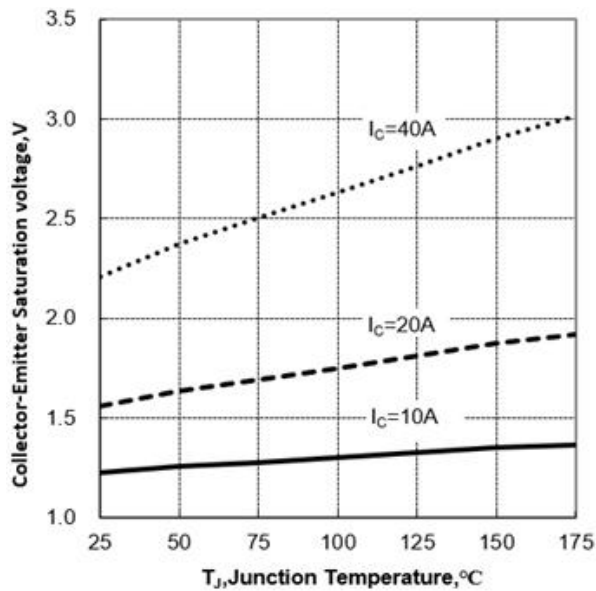


Figure 12. Typical Diode Forward Current vs Forward Voltage

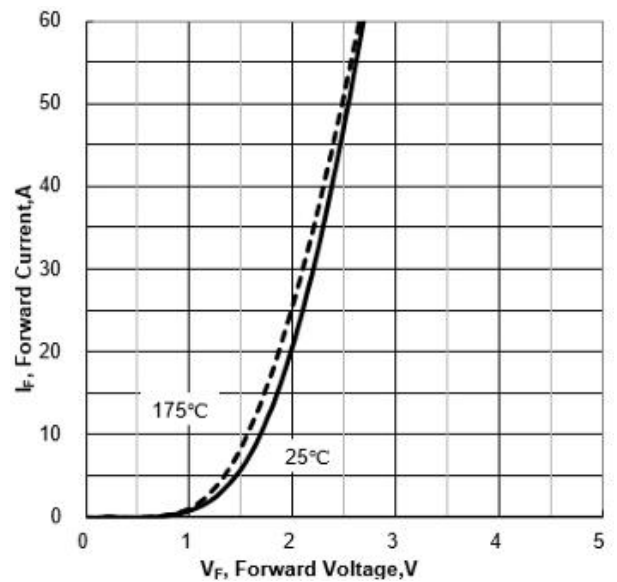


Figure 13. Typical Switching Times vs Gate Resistor
($T_J=25^\circ\text{C}$, $V_{CE}=400\text{V}$, $V_{GE}=15/0\text{V}$, $I_c=20\text{A}$)

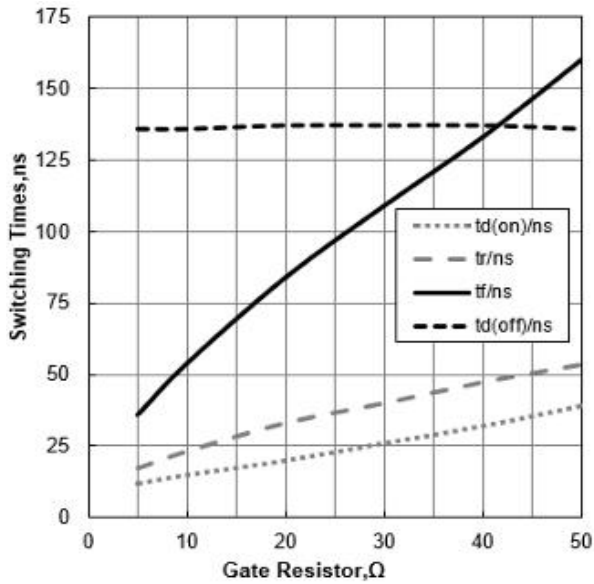


Figure 14. Typical Switching Energy vs Gate Resistor
($T_J=25^\circ\text{C}$, $V_{CE}=400\text{V}$, $V_{GE}=15/0\text{V}$, $I_c=20\text{A}$)

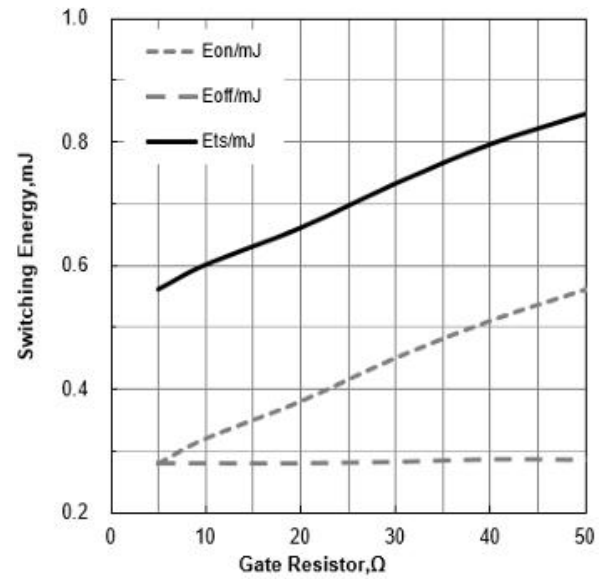


Figure 15. Typical Switching Times vs Junction Temperature
($V_{CE}=400\text{V}$, $V_{GE}=15/0\text{V}$, $I_c=20\text{A}$)

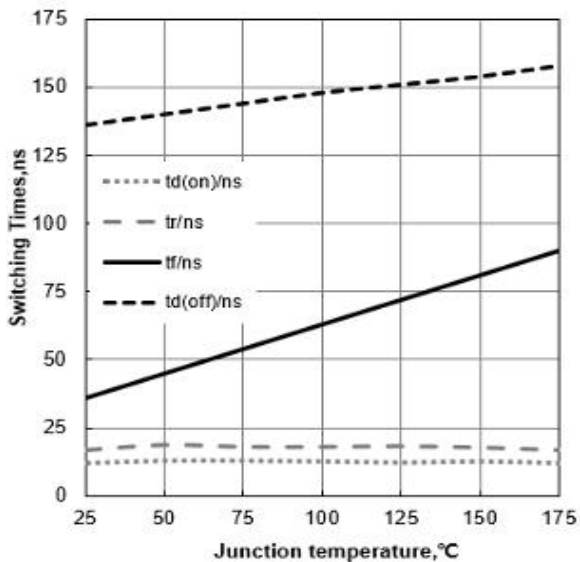


Figure 16. Typical Switching Energy vs Junction Temperature
($V_{CE}=400\text{V}$, $V_{GE}=15/0\text{V}$, $I_c=20\text{A}$)

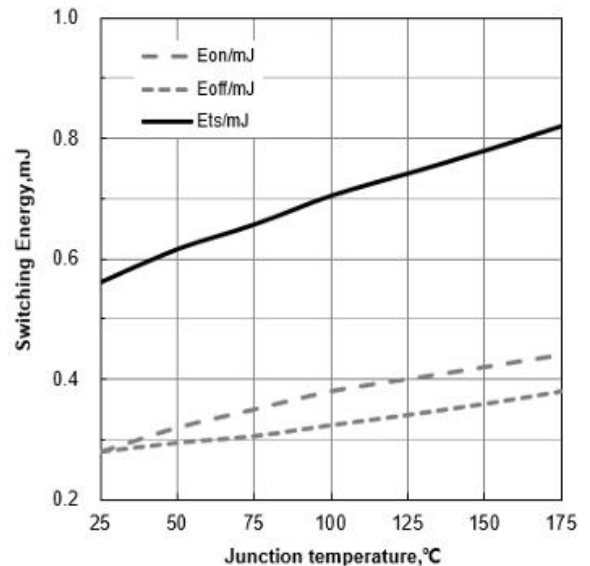


Figure 17. Typical Switching Times vs Collector Current
($T_J=25^\circ\text{C}$, $V_{CE}=400\text{V}$, $V_{GE}=15/0\text{V}$)

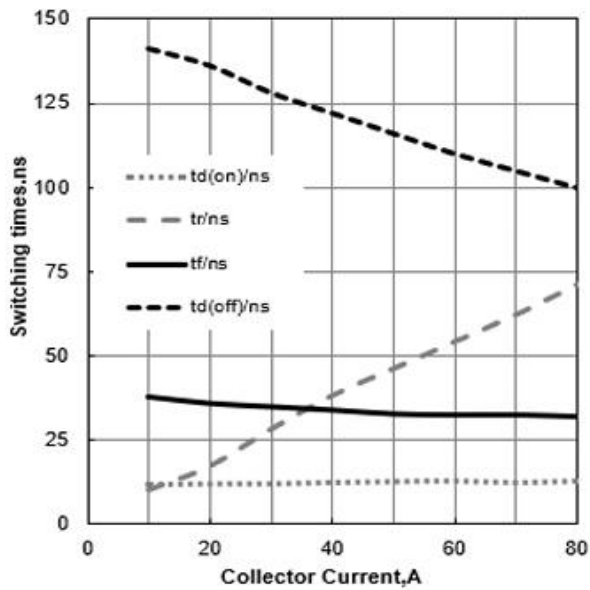


Figure 18. Typical Switching Energy vs Collector Current
($T_J=25^\circ\text{C}$, $V_{CE}=400\text{V}$, $V_{GE}=15/0\text{V}$)

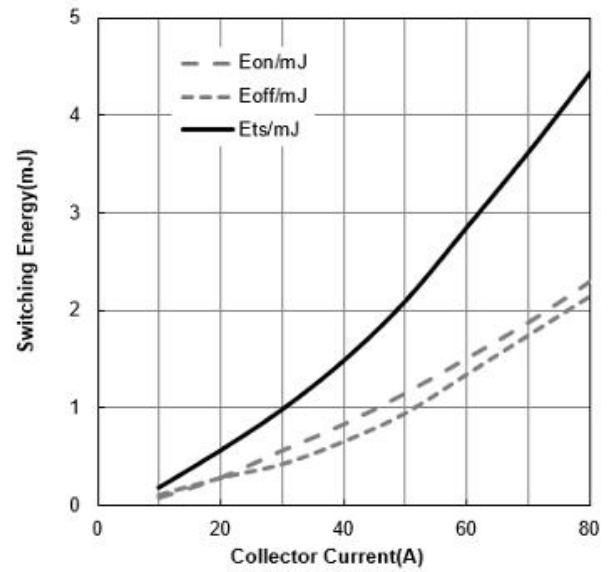


Figure 19. Typical Switching Times vs V_{CE}
($T_J=25^\circ\text{C}$, $V_{GE}=15/0\text{V}$, $I_c=20\text{A}$)

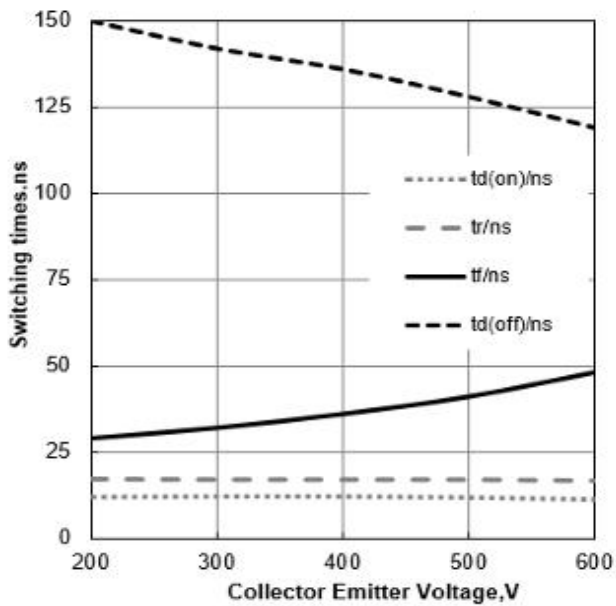


Figure 20. Typical Switching Energy vs V_{CE}
($T_J=25^\circ\text{C}$, $V_{GE}=15/0\text{V}$, $I_c=20\text{A}$)

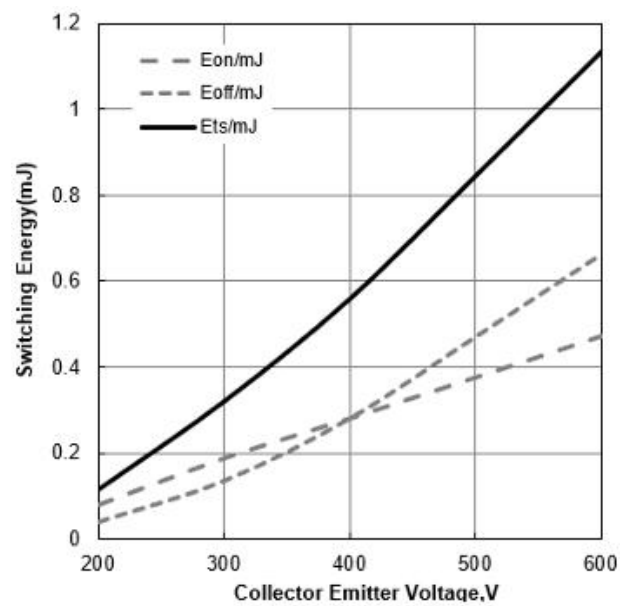


Figure 21. Typical Gate Charge

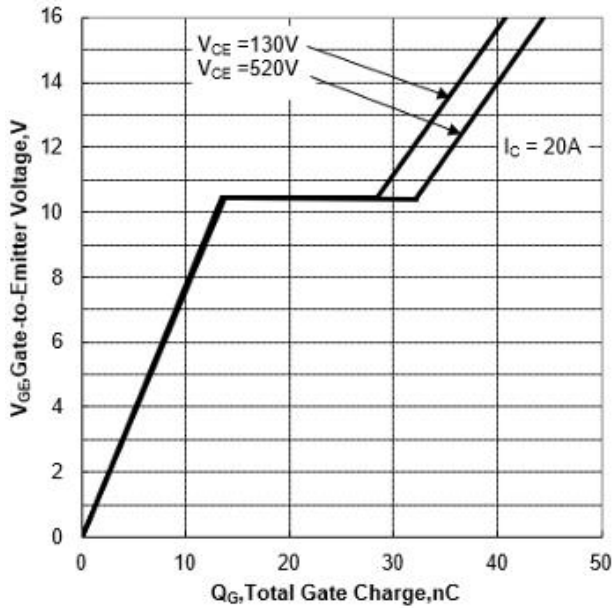


Figure 22. Typical Capacitance vs Collector Emitter Voltage

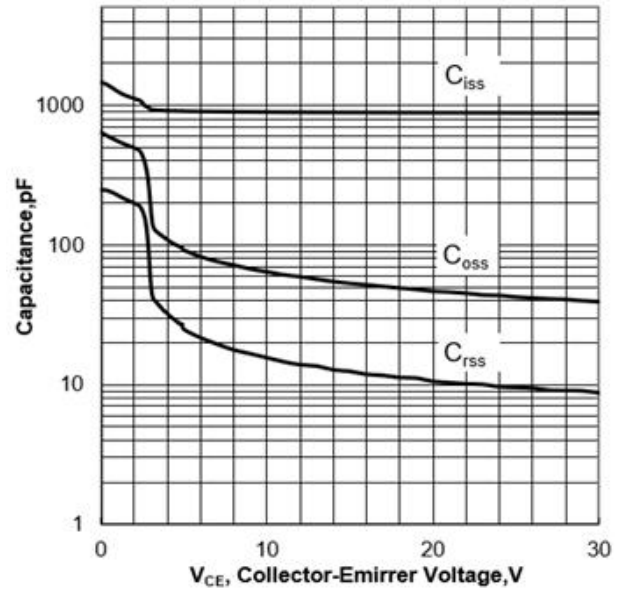


Figure 23. IGBT Transient Thermal Impedance vs Pulse Width(TO220)

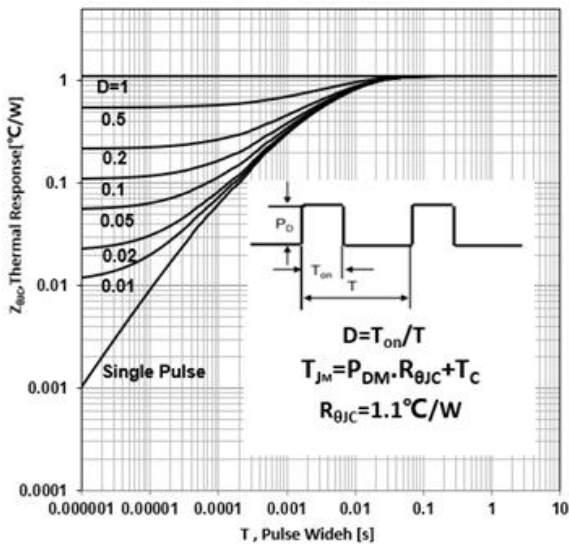


Figure 24. IGBT Transient Thermal Impedance vs Pulse Width(TO220F)

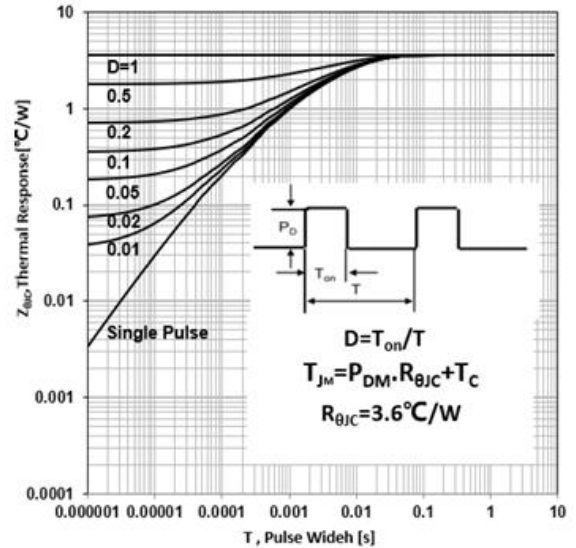


Figure 25. Diode Transient Thermal Impedance vs Pulse Width(TO220)


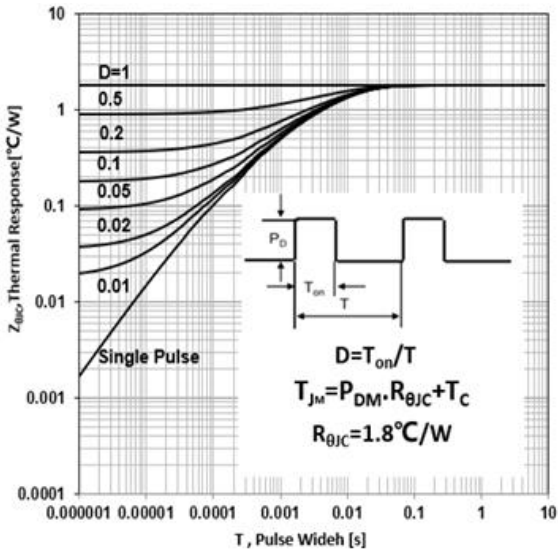


Figure 26. Diode Transient Thermal Impedance vs Pulse Width(TO220F)

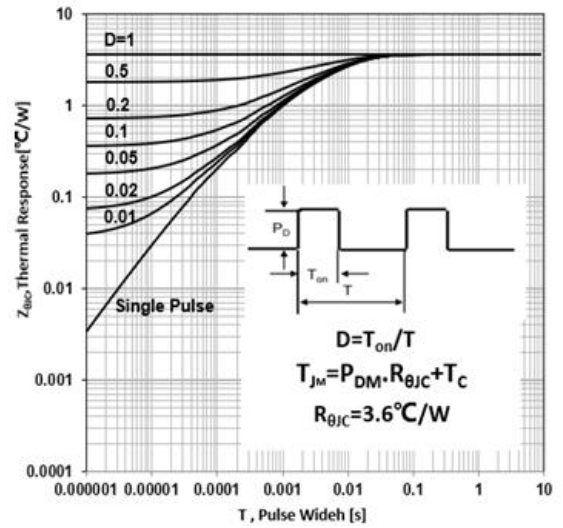

Test Circuit and Waveform

Figure 1. Inductive Switching Test Circuit

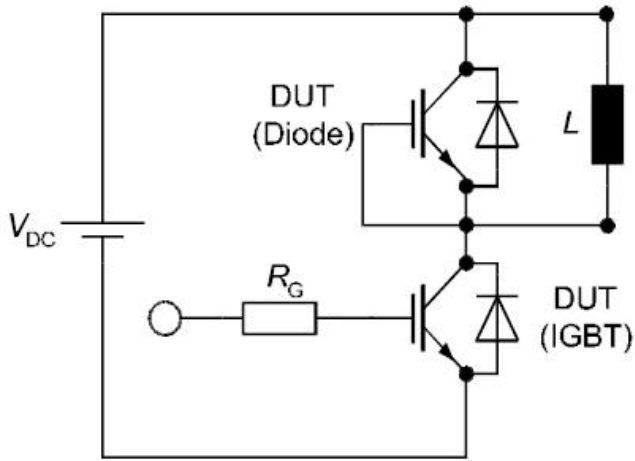


Figure 2. Definition of switching times

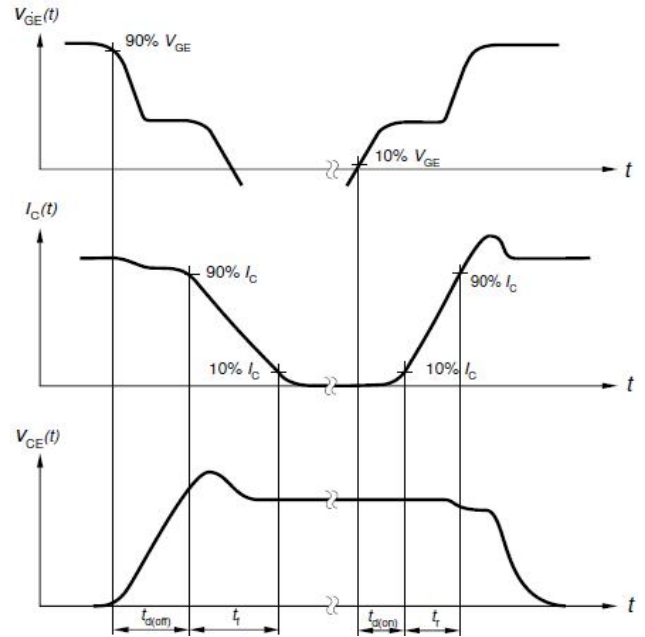


Figure 3. Definition of switching losses



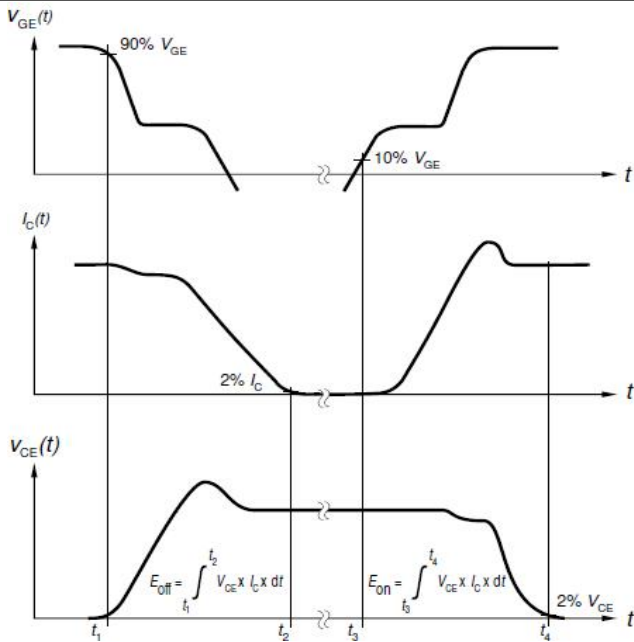


Figure 4. Definition of diode switching characteristics

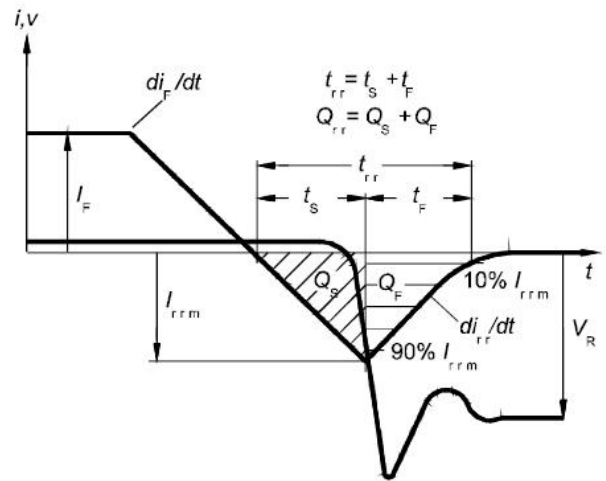


Package Information

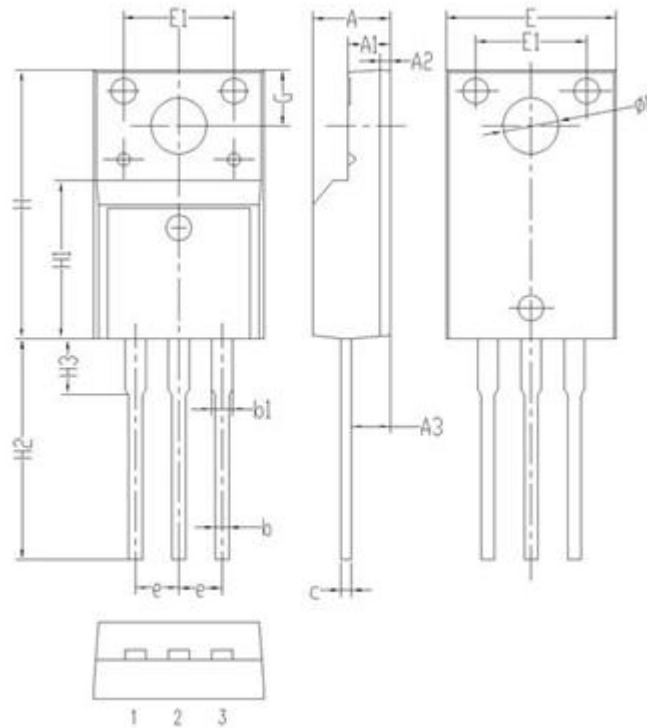

Symbol	Values(mm)	
	MIN	MAX
A	4.35	4.75
A1	2.30	2.70
A2	0.40	0.80
A3	2.10	2.50
b	0.60	1.00
b1	1.00	1.40
c	0.30	0.70
e	2.30	2.70
E	9.80	10.2
E1	6.30	6.70
H	15.6	16.0
H1	8.80	9.20
H2	12.9	13.5
H3	3.10	3.50
G	3.10	3.50
φp	3.10	3.50

TO-220F Package

Package Description

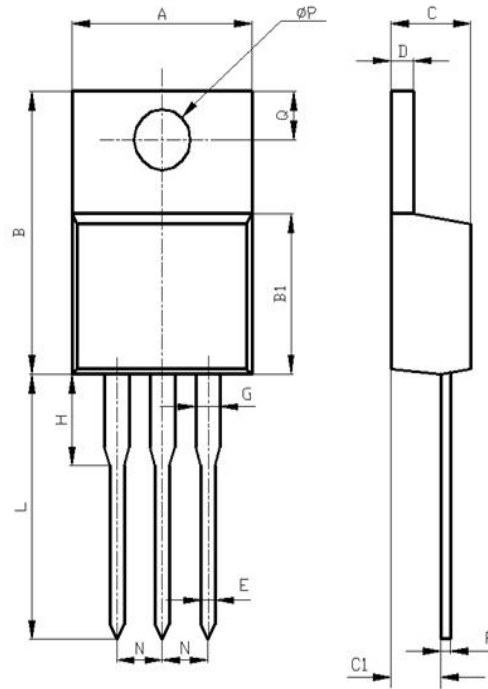

Symbol	Values(mm)	
	MIN	MAX
A	9.60	10.6
B	15.0	16.0
B1	8.90	9.50
C	4.30	4.80
C1	2.30	3.10
D	1.20	1.40
E	0.70	0.90
F	0.30	0.60
G	1.17	1.37
H	2.70	3.80
L	12.6	14.8
N	2.34	2.74
Q	2.40	3.00
ΦP	3.50	3.90

TO-220 package

NOTE:

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shenzhen Minos reserves the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:

深圳市迈诺斯科技有限公司（总部）

地址：深圳市福田区华富街道田面社区深南中路4026号田面城市大厦16D

邮编：518025

电话：0755-83273777