


Features

- High Continuous Forward Current
- Low Reverse Current
- Very Low Forward Voltage Drop
- Very High Switching Speed



Applications

- surface mount schottky barrier rectifier
- Buck and Boost dc-dc Converters
- Reverse Voltage and Current Protection
- Clamping & Protection



Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Reverse Voltage	VR	30	V
Forward Current (DC)	IF	500	mA
Forward Surge Current (tp = 8 ms; square wave)	IFSM	4.0	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Total Power Dissipation	PD	200	mW
Typical Thermal Resistance per leg @TA = 25°C	RθJA	400	°C/W
Operating Junction Temperature Range	TJ	-40 to +125	°C
Storage Temperature Range	TSTG	-40 to +150	°C


Mounted onto a 4 in square FR-4 board 10 mm sq. 1 oz. Cu 0.06" thick single sided. Operating to steady state.

Electrical Characteristics (TA=25°C unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage	VF*	--	--	0.32	V	IF=10mA
		--	--	0.63	V	IF=500mA
Reverse Leakage	IR**	--	--	30	uA	VR = 10 V
		--	--	80	uA	VR = 30 V
Total Capacitance	CT	--	10	--	pF	VR = 10 V, f = 1 MHz

*Pulse width ≤380 uS, Duty cycle < 2%; **pulse test , tp≤5ms

Typical Electrical Characteristic Curves

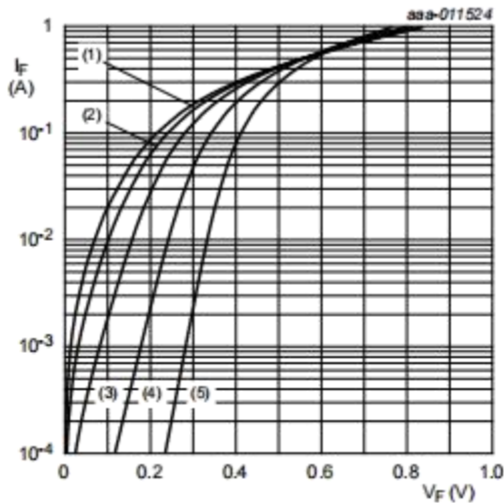


pulsed condition
 (1) $T_j = 150\text{ }^\circ\text{C}$
 (2) $T_j = 125\text{ }^\circ\text{C}$
 (3) $T_j = 85\text{ }^\circ\text{C}$
 (4) $T_j = 25\text{ }^\circ\text{C}$
 (5) $T_j = -40\text{ }^\circ\text{C}$

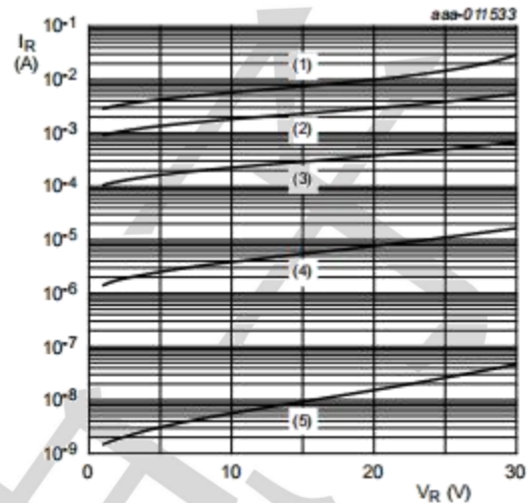


pulsed condition
 (1) $T_j = 150\text{ }^\circ\text{C}$
 (2) $T_j = 125\text{ }^\circ\text{C}$
 (3) $T_j = 85\text{ }^\circ\text{C}$
 (4) $T_j = 25\text{ }^\circ\text{C}$
 (5) $T_j = -40\text{ }^\circ\text{C}$

Forward current as a function of forward voltage

Reverse current as a function of reverse voltage

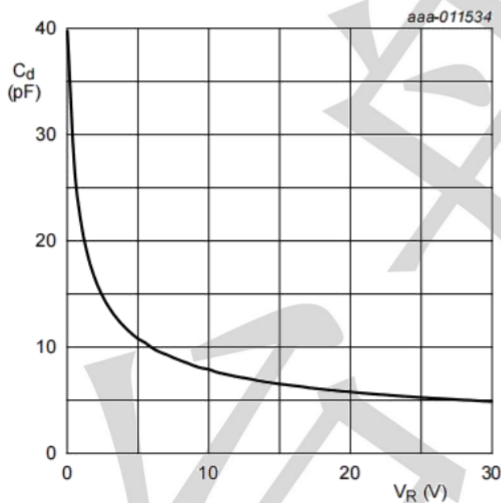

$f = 1\text{ MHz}$; $T_{amb} = 25\text{ }^\circ\text{C}$

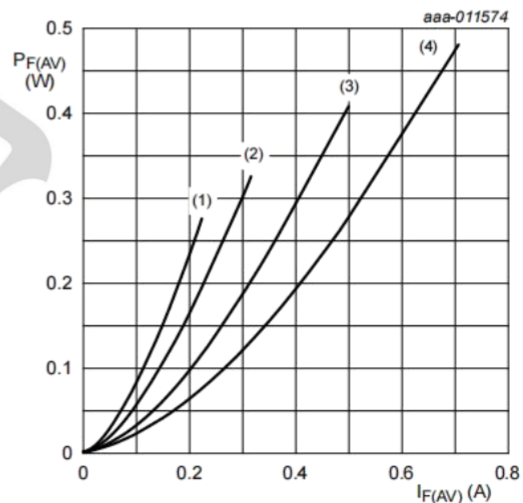


$T_j = 150\text{ }^\circ\text{C}$
 (1) $\delta = 0.1$
 (2) $\delta = 0.2$
 (3) $\delta = 0.5$
 (4) $\delta = 1$

Diode capacitance as a function of reverse voltage

Average forward power dissipation as a function of average forward current

Outline Drawing Package information - WLL-2-1, (0201)

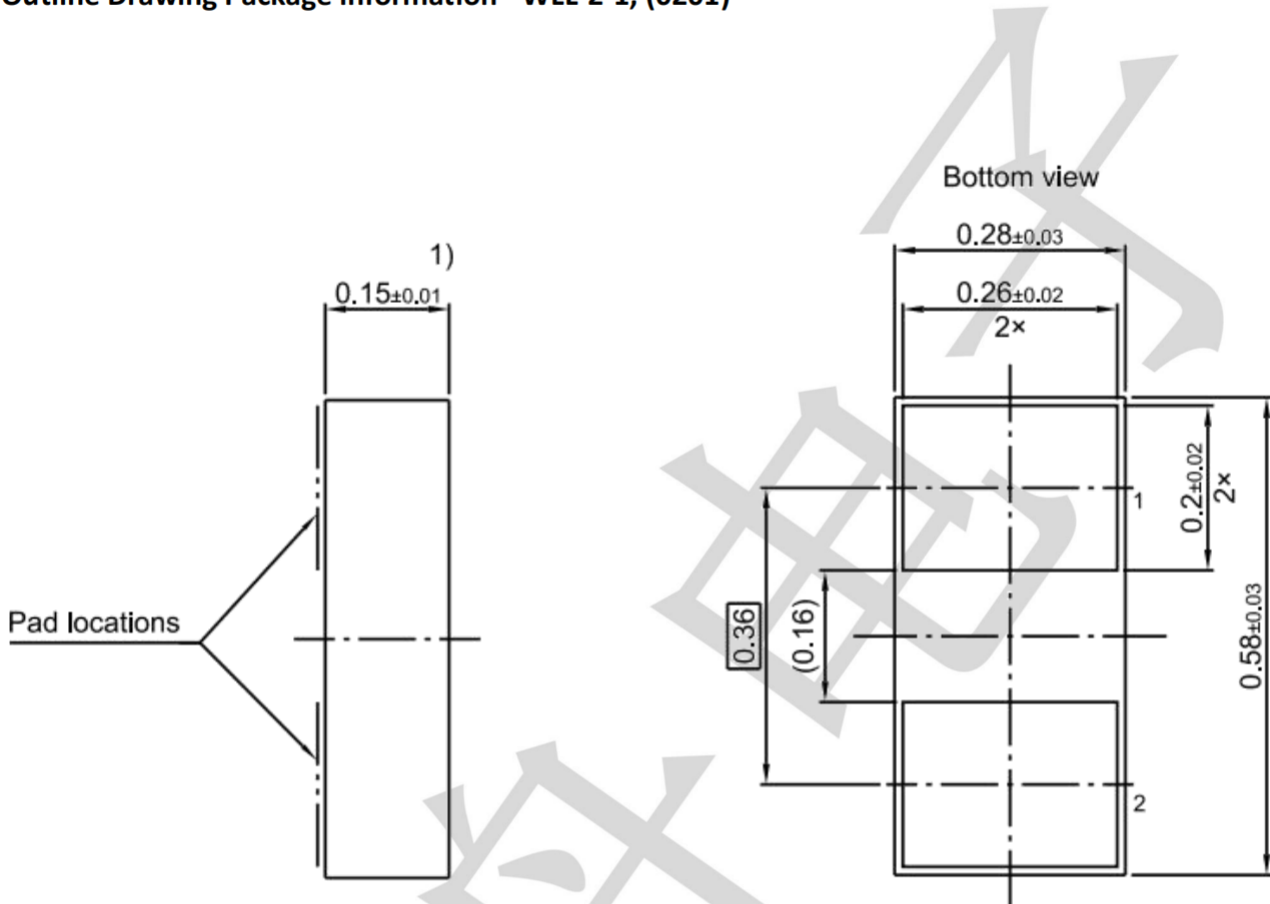

1) The total package height includes the pad thickness

All dimensions are in units mm

The drawing is in compliance with ISO 128-30, Projection Method 1 []