

Features

- 7-Channel High Current Sink Drivers
- Supports up to 20V Output Pull-up Voltage
- Low Output VOL of 0.6V (Typical) with
- 100mA (Typ.) Current Sink per Channel at 3.3V Logic Input
- 140mA (Typ.) Current Sink per Channel at 5.0V Logic Input
- Compatible to 3.3V and 5.0V Micro-Controllers and Logic Interface
- Internal Free-wheeling Diodes for Inductive Kick-back Protection
- Input Pull-down Resistors Allows Tri-Stating the Input Driver
- Input RC-Snubber to Eliminate Spurious Operation in Noisy Environments
- ESD: 4kV HBM, 1kV CDM
- Available in 16-Pin SOP packages



Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
ULN2003V12M/TR-HG	SOP-16	ULN2003V12	REEL	2500pcs/Reel

Description

The ULN2003V12 are multi-channel sink drivers comprised of 7-channel output stages. The ULN2003V12 sink driver features 7 low output impedance drivers that minimize on-chip power dissipation and an actual low power upgrade version for popular ULN2003A family in real applications. When driving a typical 12V relay coil, a ULN2003V12 will dissipate 12 times lower power compared to ULN2003A.


The ULN2003V12 both support 3.3V to 5V CMOS logic input interface, thus making it compatible to a wide range of micro-controllers and other logic interfaces, and also feature an improved input interface that minimizes the input DC current drawn from the external drivers. The input RC snubber circuit integrated at ULN2003V12 improves the performance in noisy operating conditions, and the internal pull-down resistor at input stage helps allow input logic to be tri-stated.

As shown in the Functional Diagram, each output of the ULN2003V12 features an internal free-wheeling diode connected in a common-cathode configuration at the COM pin which provides flexibility of increasing current sink capability through combining several adjacent channels in parallel. Under typical conditions the ULN2003V12 can support up to 1.0A of load current when all 7- channels are connected in parallel.

Applications

- Inputs Compatible with Popular Logic Types
- Relay Driver Applications
- Stepping Motor Applications
- Logic Level Shifter

Pin Assignments

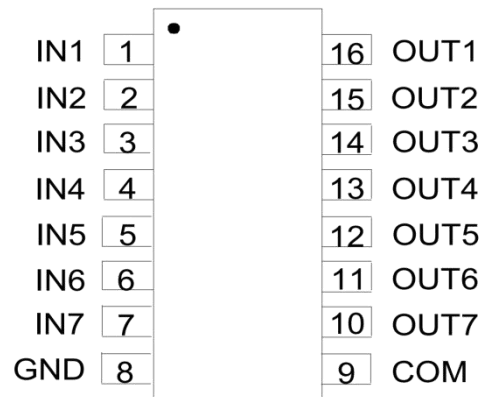


DIP-16/SOP-16/TSSOP-16/QSOP-16

(Top View)

Pin Descriptions


Pin Name	Pin Number	Description
IN1 ~ IN7	1~7	Logic Input Pins IN1 through IN7
GND	8	Ground Reference Pin
COM	9	Internal Free-Wheeling Diode Common Cathode Pin
OUT7 ~ OUT1	10~16	Channel Output Pins OUT7 through OUT1

Functional Diagram

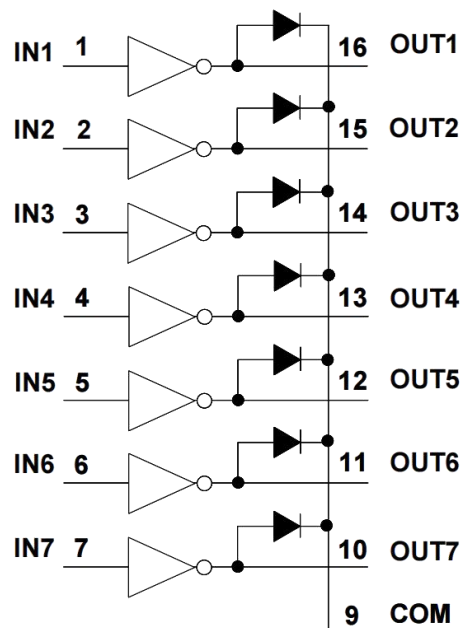

ULN2003V12

Functional Block Diagram (Single Channel)

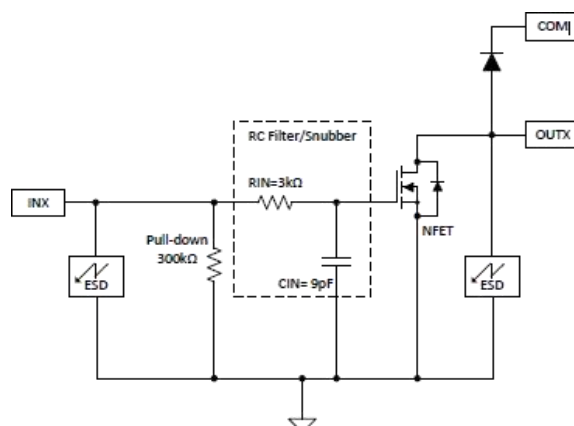

Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Symbol	Parameter	Rating		Unit
		MIN	MAX	
V _{IN}	Pin2 IN1~IN7 to GND Voltage	-0.3	5.5	V
V _{OUT}	Pins OUT1~OUT7 to GND Voltage	-	20	V
V _{COM}	Pin COM to GND Voltage	-	20	V
I _{GND}	Max GND-Pin Continuous Current (+100°C < T _J < +125°C)	-	700	mA
	Max GND-Pin Continuous Current (T _J < +100°C)	-	1.0	A
P _D	Total Device Power Dissipation at T _A = +85°C	TBD		W
θ _{JA}	Thermal Resistance Junction-to-Ambient (Note 6)	TBD		°C/W
θ _{JC}	Thermal Resistance Junction-to-Case (Note 7)	TBD		°C/W
ESD	HBM	-	4	kV
	CDM	-	1	kV
T _J	Junction Temperature	-55	150	°C
T _{STG}	Storage Temperature	-55	150	°C
T _L	Lead Temperature (Soldering, 10 seconds)	-	260	°C

Notes:

- Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only.
Functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.
Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- All voltage values are with respect to the emitter/substrate terminal E, unless otherwise noted.
- Maximum power dissipation is a function of T_{J(max)}, θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is PD = (T_{J(max)} – T_A)/θ_{JA}. Operating at the absolute maximum T_J of +150°C can affect reliability.
- Maximum power dissipation is a function of T_{J(max)}, θ_{JC}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is PD = (T_{J(max)} – T_C)/θ_{JA}. Operating at the absolute maximum T_J of +150°C can affect reliability.

Recommended Operating Conditions (@T_A = +25°C, unless otherwise specified.)

Symbol	Parameter	Min	TYP	Max	Unit
V _{OUT}	Channel Off-Stage Output Pull-Up Voltage	-	-	16	V
V _{COM}	COM Pin Voltage	-	-	16	V
I _{OUT(ON)}	Per Channel Continuous Sink Current	VINx = 3.3V	-	100 ⁽⁵⁾	mA
		VINx = 5.0V	-	140 ⁽⁵⁾	
T _J	Operating Junction Temperature ⁽¹⁾	-40	-	125	°C

Note(1) :Operating temperature range: -40°C to +125°C. This product is designed for industrial grade applications. For automotive grade versions compliant with AEC-Q100, please conduct internal screening per the standard or contact our sales team for availability.


Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Specified over the recommended junction temperature range T_J=-40°C to +125°C and over recommended operating conditions unless otherwise noted. Typical values are at T_J = +25°C.


Parameter		Test conditions	Min	Typ.	Max	Unit
INPUTS IN1 THROUGH IN7 PARAMETERS						
V _{I(on)}	IN1~IN7 logic high input voltage	V _{CE} = 2V, I _C = 80mA	1.65	-	-	V
V _{I(OFF)}	IN1~IN7 logic low input voltage	I _C = 5μA	-	-	0.5	V
I _{I(ON)}	IN1~IN7 ON state input current	V _i =3.3V	-	12	25	uA
I _{I(OFF)}	IN1~IN7 OFF state input leakage	V _i =0V	-	-	250	nA
OUTPUTS OUT1 THROUGH OUT7 PARAMETERS						
V _{OL(VCE-SAT)}	OUT1~OUT7 low-level output voltage	V _{INX} = 3.3V, I _{OUTX} = 20mA	-	0.12	0.15	V
		V _{INX} = 3.3V, I _{OUTX} = 100mA	-	0.6	0.75	
		V _{INX} = 5.0V, I _{OUTX} = 20mA	-	0.09	0.11	
		V _{INX} = 5.0V, I _{OUTX} = 140mA	-	0.6	0.75	
I _{OUT(ON)}	OUT1~OUT7 ON-state continuous current at V _{OUTX} = 0.6V	V _{INX} = 3.3V, V _{OUTX} = 0.6V	80	100	-	mA
		V _{INX} = 5.0V, V _{OUTX} = 0.6V	95	140	-	
I _{OUT(ON)}	OUT1~OUT7 OFF-state leakage current	V _{INX} = 0V, V _{OUTX} = V _{COM} =16V	-	0.5	-	uA
SWITCHING PARAMETERS						
t _{PHL}	OUT1~OUT7 logic high propagation delay	V _{INX} = 3.3V, V _{pull-up} = 12V, R _{pull-up} = 1kΩ	-	50	70	ns
t _{PLH}	OUT1~OUT7 logic low propagation delay	V _{INX} = 3.3V, V _{pull-up} = 12V, R _{pull-up} = 1kΩ	-	121	140	ns
t _{CHANNEL}	Channel to channel delay	Over recommended operating conditions and with same test conditions on channels.	-	15	50	ns
R _{PD}	IN1~IN7 input pull-down resistance	-	210k	300k	390k	Ω
ζ	IN1~IN7 input filter time constant	-	-	9	-	ns
C _{OUT}	OUT1~OUT7 output capacitance	V _{INX} = 3.3V, V _{OUTX} = 0.4V	-	15	-	pF
FREE-WHEELING DIODE PARAMETERS						
V _F	Forward voltage drop	I _{F-peak} = 140mA, V _F = V _{OUTX} -V _{COM}	-	1.2	-	V
I _{F-peak}	Diode peak forward current	-	-	140	-	mA

Performance Characteristics


Output Current vs. Input Voltage (One Darlington)

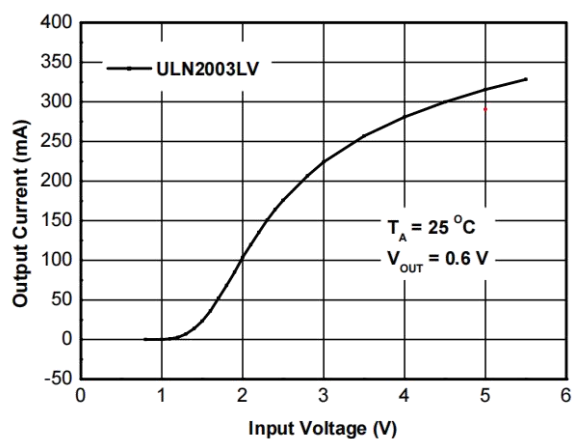


Output Current vs. Input Voltage (All Darlington in Parallel)

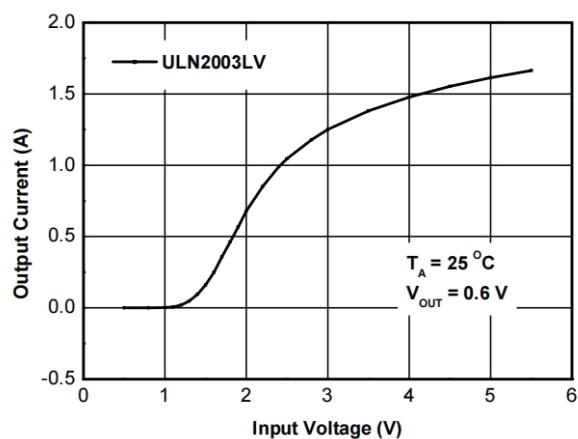

Output Current vs. Output Voltage

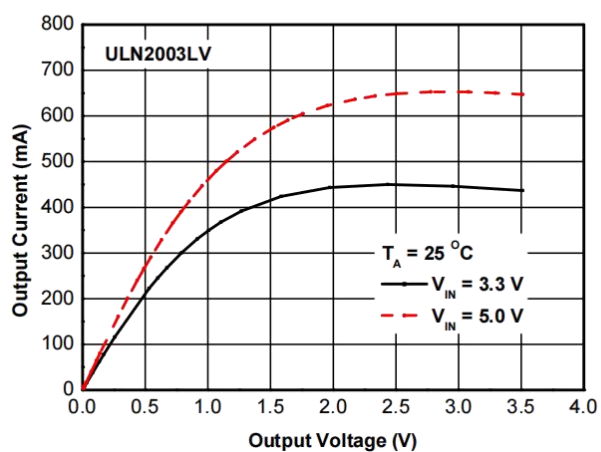


Diode Forward Voltage vs. Diode Forward Current

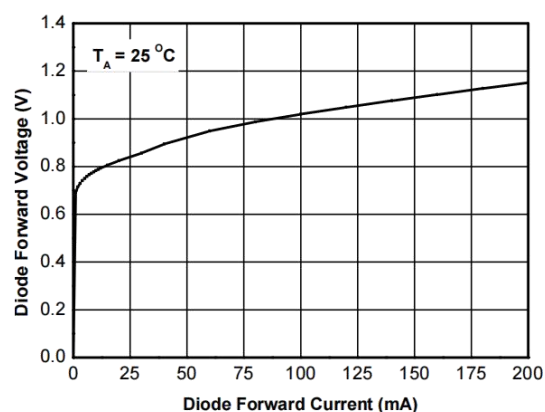

Physical Dimensions

SOP-16

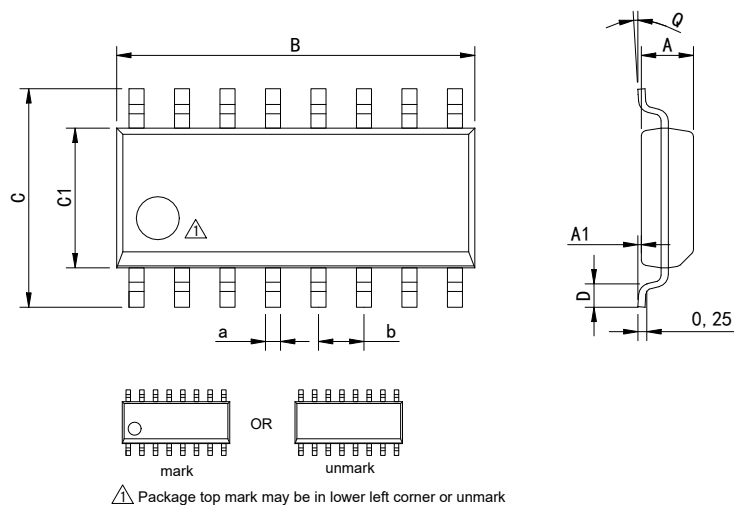

Dimensions In Millimeters(SOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	9.80	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	10.0	6.20	4.00	0.80	8°	0.45	

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2016-10	New	1-9
V1.2	2024-11	Update Lead Temperature	4

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.