

100mA Three Teminal Regulator

Features

- Quiescent Current:6mA ($V_{OUT}=-5,-6,-9V$); 6.5mA($V_{OUT}=-12V$)
- Input Voltage: -30V
- Output Current: 100mA
- Low Dropout Voltage: -1.7V(Max.)@40mA ($V_{OUT}=-5.0V$)
- Thermal overload protection
- Short circuit current limiting

Applications

- Battery Power Supply Equipment
- Communication Equipment
- Audio/Video Equipment
- Monitor Equipment


General Description

The HR79 Series is three-terminal positive regulators. One of these regulators can deliver up to 100mA of output current. The internal limiting and thermal-shutdown features of the regulator make them essentially immune to overload. When used as are placement for a zener diode-resistor Combination, an effective improvement in output impedance can be obtained, together with lower quiescent current.

Reference News


SOT-89 Marking:
HR79L05V: 79L05 HR79L06V: 79L06
HR79L09V: 79L09 HR78L12V: 78L12

Part Numbering

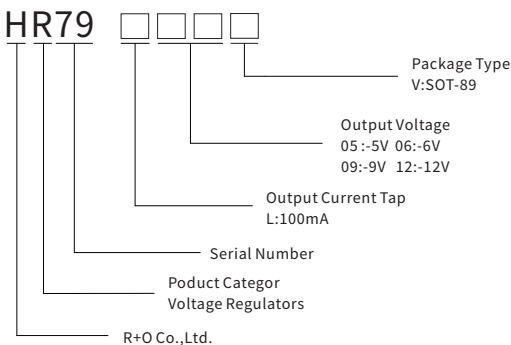


Ordering Information


Package	Package Code	Unit Weight(g)	Reel(pcs)	Box(pcs)	Carton(pcs)	Delivery Mode	MSL
SOT-89	R1	0.045	1000	8000	48000	7"	3

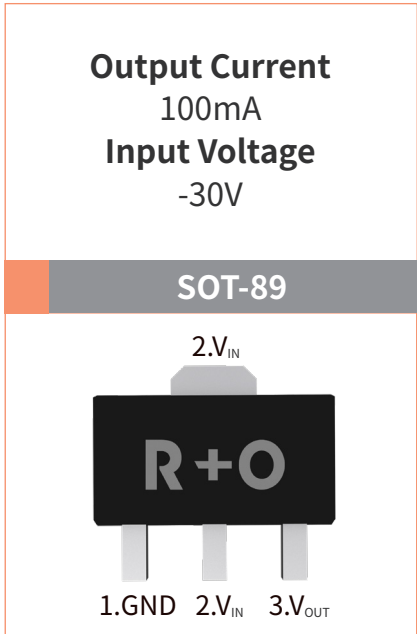

Block Diagram

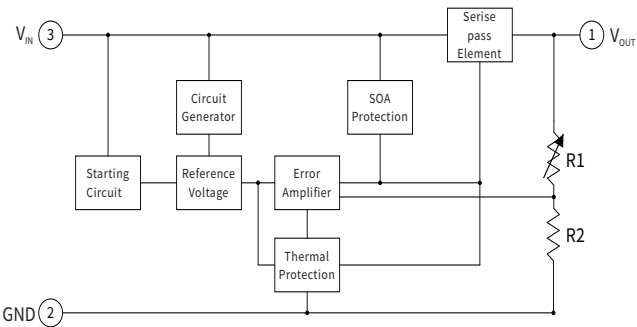

Typical Application Circuit

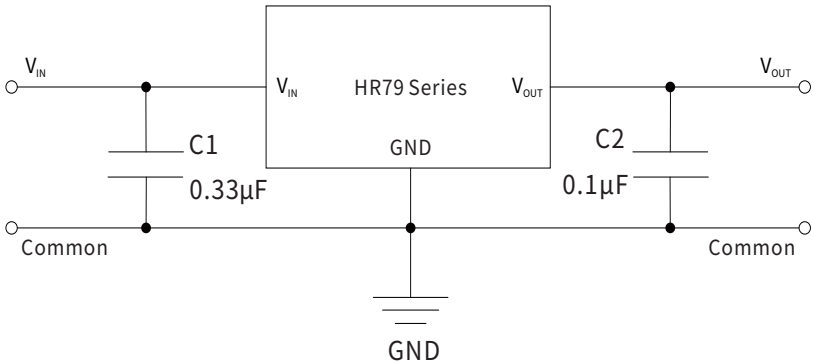

Absolute Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Value	UNIT
Input Voltage Limit	V_{IN}	-30	V
Operating Current	I_O	100	mA
Power Dissipation	P_D	600	mW
Thermal Resistance Junction-Ambient	$R_{\theta JA}$	208	°C /W
Solder Temperature/Time	T_d	260/10	°C /S
Operating Ambient Temperature	T_A	-40~+125	°C
Junction Temperature	T_J	-55~+150	°C
Storage Temperature	T_{stg}	-55~+150	°C

● **Electrical Characteristics(HR79L05V)** ($V_i=-10V$ $I_o=40mA$ $C_i=0.33\mu F$ $C_o=0.1\mu F$ $T_a=25^\circ C$ Unless otherwise specified)

PARAMETER	SYMBOL	Conditions	Min.	Typ.	Max.	UNIT
Output Voltage	V_{OUT}	$I_{OUT}=40mA, V_{IN}=-10V$ $25^\circ C$	-4.85	-5	-5.15	V
Output Voltage	V_{OUT}	$-7V \leq V_{IN} \leq -20V$ $1mA \leq I_{OUT} \leq 40mA$ $0 \sim 125^\circ C$	-4.75	-5	-5.25	V
Output Voltage	V_{OUT}	$V_{IN}=-10V$ $1mA \leq I_{OUT} \leq 70mA$ $0 \sim 125^\circ C$	-4.75	-5	-5.25	V
Dropout Voltage	V_D	$I_{OUT}=40mA, 25^\circ C$	—	-1.7	—	V
Quiescent Current	I_Q	$V_{IN}=-10V, I_{OUT}=0mA$ $25^\circ C$	—	2	6	mA
Quiescent Current Change	ΔI_Q	$-8V \leq V_{IN} < -20V$ $0 \sim 125^\circ C$	—	—	1.5	mA
Quiescent Current Change	ΔI_Q	$1mA \leq I_{OUT} \leq 40mA$ $0 \sim 125^\circ C$	—	—	0.1	mA
Line Regulation	ΔV_{OUT}	$-7V \leq V_{IN} \leq -20V$ $I_{OUT}=40mA, 25^\circ C$	—	15	150	mV
Line Regulation	ΔV_{OUT}	$-8V \leq V_{IN} \leq -20V$ $I_{OUT}=40mA, 25^\circ C$	—	12	100	mV
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 100mA$ $V_{IN}=-10V, 25^\circ C$	—	20	60	mV
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 40mA$ $V_{IN}=-10V, 25^\circ C$	—	10	30	mV
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$ $25^\circ C$	—	40	—	$\mu V/V_{OUT}$
Ripple Rejection	RR	$-8V \leq V_{IN} \leq -18V$ $f=120Hz, 0 \sim 125^\circ C$	41	49	—	dB

● **Electrical Characteristics(HR79L06V)** ($V_i=-12V$ $I_o=40mA$ $C_i=0.33\mu F$ $C_o=0.1\mu F$ $T_a=25^\circ C$ Unless otherwise specified)

PARAMETER	SYMBOL	Conditions	Min.	Typ.	Max.	UNIT
Output Voltage	V_{OUT}	$I_{OUT}=40mA, V_{IN}=-12V$ $25^\circ C$	-5.75	-6	-6.24	V
Output Voltage	V_{OUT}	$-8V \leq V_{IN} \leq -21V$ $1mA \leq I_{OUT} \leq 40mA$ $0 \sim 125^\circ C$	-5.6	-6	-6.4	V
Output Voltage	V_{OUT}	$V_{IN}=-12V$ $1mA \leq I_{OUT} \leq 70mA$ $0 \sim 125^\circ C$	-5.6	-6	-6.4	V
Dropout Voltage	V_D	$I_{OUT}=40mA, 25^\circ C$	—	-1.7	—	V
Quiescent Current	I_Q	$V_{IN}=-12V, I_{OUT}=0mA$ $25^\circ C$	—	2	6	mA
Quiescent Current Change	ΔI_Q	$-10V \leq V_{IN} < -21V$ $0 \sim 125^\circ C$	—	—	1.5	mA
Quiescent Current Change	ΔI_Q	$1mA \leq I_{OUT} \leq 40mA$ $0 \sim 125^\circ C$	—	—	0.1	mA
Line Regulation	ΔV_{OUT}	$-8V \leq V_{IN} \leq -21V$ $I_{OUT}=40mA, 25^\circ C$	—	18	160	mV
Line Regulation	ΔV_{OUT}	$-10V \leq V_{IN} \leq -21V$ $I_{OUT}=40mA, 25^\circ C$	—	16	150	mV
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 100mA$ $V_{IN}=-12V, 25^\circ C$	—	8	72	mV
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 40mA$ $V_{IN}=-12V, 25^\circ C$	—	7	50	mV
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$ $25^\circ C$	—	144	—	$\mu V/V_{OUT}$
Ripple Rejection	RR	$-9V \leq V_{IN} \leq -19V$ $f=120Hz, 0 \sim 125^\circ C$	40	70	—	dB







● **Electrical Characteristics(HR79L09V)** ($V_i=-15V$ $I_o=40mA$ $C_i=0.33\mu F$ $C_o=0.1\mu F$ $T_a=25^\circ C$ Unless otherwise specified)

PARAMETER	SYMBOL	Conditions	Min.	Typ.	Max.	UNIT
Output Voltage	V_{OUT}	$I_{OUT}=40mA, V_{IN}=-15V$ $25^\circ C$	-8.73	-9	-9.27	V
Output Voltage	V_{OUT}	$-11V \leq V_{IN} \leq -24V$ $1mA \leq I_{OUT} \leq 40mA$ $0 \sim 125^\circ C$	-8.6	-9	-9.4	V
Output Voltage	V_{OUT}	$V_{IN}=-15V$ $1mA \leq I_{OUT} \leq 70mA$ $0 \sim 125^\circ C$	-8.6	-9	-9.4	V
Dropout Voltage	V_D	$I_{OUT}=40mA, 25^\circ C$	—	-1.7	—	V
Quiescent Current	I_Q	$V_{IN}=-15V, I_{OUT}=0mA$ $25^\circ C$	—	3	6	mA
Quiescent Current Change	ΔI_Q	$-12V \leq V_{IN} < -23V$ $0 \sim 125^\circ C$	—	—	1.5	mA
Quiescent Current Change	ΔI_Q	$1mA \leq I_{OUT} \leq 40mA$ $0 \sim 125^\circ C$	—	—	0.1	mA
Line Regulation	ΔV_{OUT}	$-11V \leq V_{IN} \leq -24V$ $I_{OUT}=40mA, 25^\circ C$	—	50	200	mV
Line Regulation	ΔV_{OUT}	$-12V \leq V_{IN} \leq -23V$ $I_{OUT}=40mA, 25^\circ C$	—	30	150	mV
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 100mA$ $V_{IN}=-15V, 25^\circ C$	—	90	100	mV
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 40mA$ $V_{IN}=-15V, 25^\circ C$	—	60	80	mV
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$ $25^\circ C$	—	200	—	$\mu V/V_{OUT}$
Ripple Rejection	RR	$-12V \leq V_{IN} \leq -23V$ $f=120Hz, 0 \sim 125^\circ C$	30	60	—	dB

● **Electrical Characteristics(HR79L12V)** ($V_i=-19V$ $I_o=40mA$ $C_i=0.33\mu F$ $C_o=0.1\mu F$ $T_a=25^\circ C$ Unless otherwise specified)

PARAMETER	SYMBOL	Conditions	Min.	Typ.	Max.	UNIT
Output Voltage	V_{OUT}	$I_{OUT}=40mA, V_{IN}=-19V$ $25^\circ C$	-11.64	-12	-12.36	V
Output Voltage	V_{OUT}	$-14.5V \leq V_{IN} \leq -27V$ $1mA \leq I_{OUT} \leq 40mA$ $0 \sim 125^\circ C$	-11.4	-12	-12.6	V
Output Voltage	V_{OUT}	$V_{IN}=-19V$ $1mA \leq I_{OUT} \leq 70mA$ $0 \sim 125^\circ C$	-11.4	-12	-12.6	V
Dropout Voltage	V_D	$I_{OUT}=40mA, 25^\circ C$	—	-1.7	—	V
Quiescent Current	I_Q	$V_{IN}=-19V, I_{OUT}=0mA$ $25^\circ C$	—	—	6.5	mA
Quiescent Current Change	ΔI_Q	$-16V \leq V_{IN} < -27V$ $0 \sim 125^\circ C$	—	—	1.5	mA
Quiescent Current Change	ΔI_Q	$1mA \leq I_{OUT} \leq 40mA$ $0 \sim 125^\circ C$	—	—	0.1	mA
Line Regulation	ΔV_{OUT}	$-14.5V \leq V_{IN} \leq -27V$ $I_{OUT}=40mA, 25^\circ C$	—	50	250	mV
Line Regulation	ΔV_{OUT}	$-16V \leq V_{IN} \leq -27V$ $I_{OUT}=40mA, 25^\circ C$	—	40	200	mV
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 100mA$ $V_{IN}=-19V, 25^\circ C$	—	24	100	mV
Load Regulation	ΔV_{OUT}	$1mA \leq I_{OUT} \leq 40mA$ $V_{IN}=-19V, 25^\circ C$	—	15	50	mV
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$ $25^\circ C$	—	80	—	$\mu V/V_{OUT}$
Ripple Rejection	RR	$-15V \leq V_{IN} \leq -25V$ $f=120Hz, 0 \sim 125^\circ C$	37	42	—	dB

● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

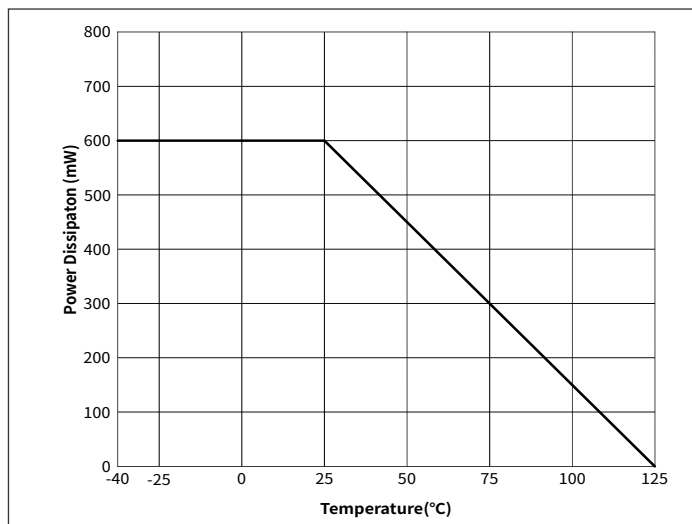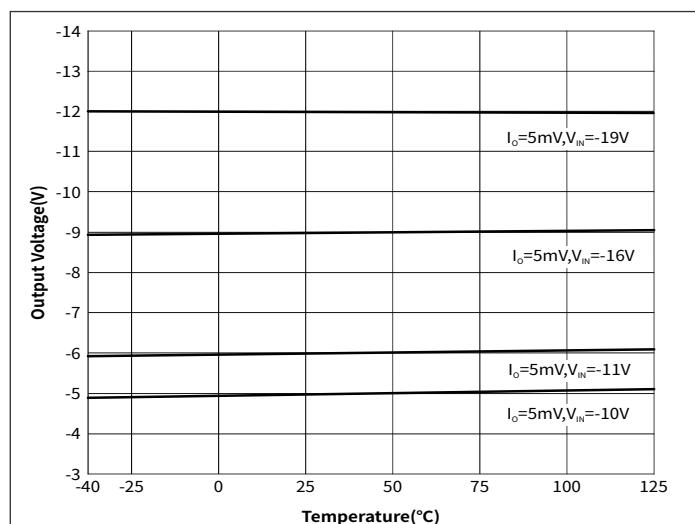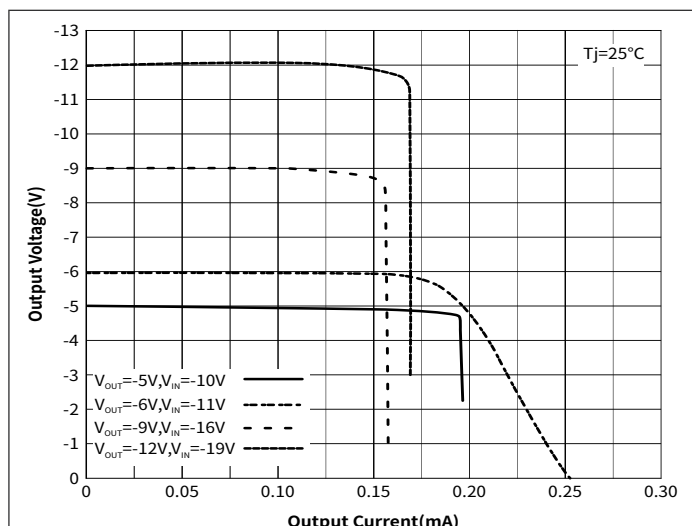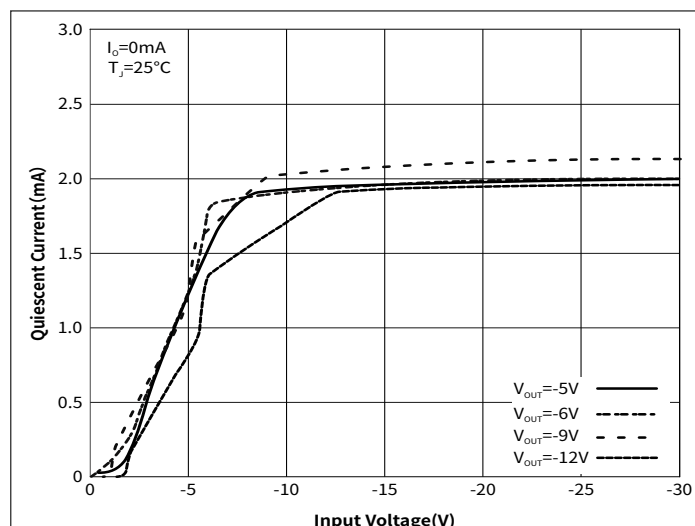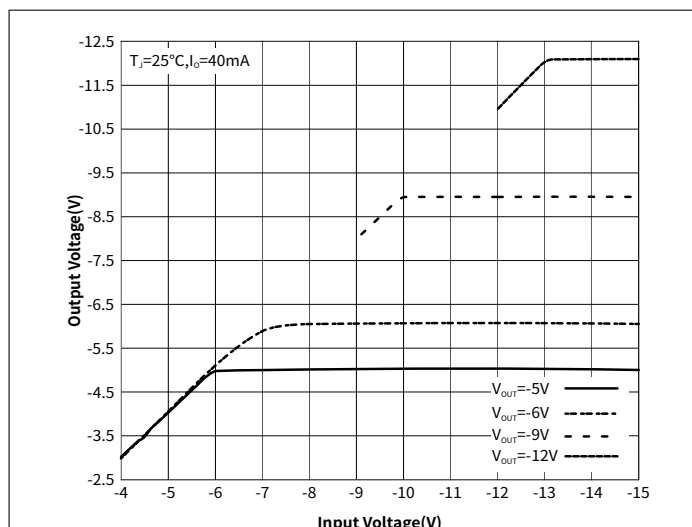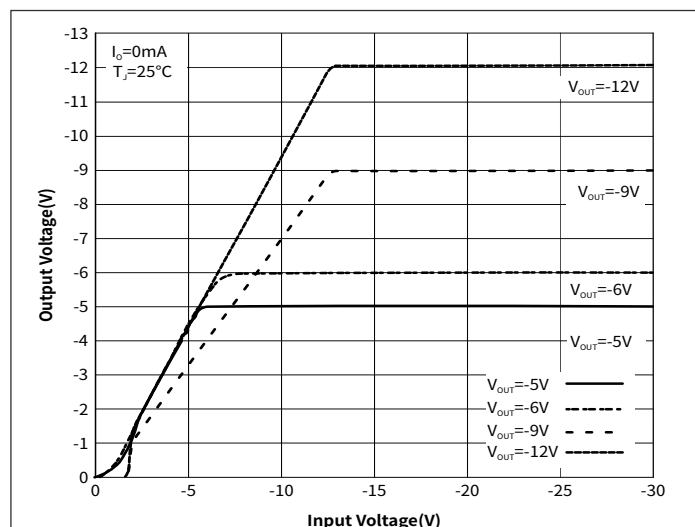

● Package Outline Dimensions (SOT-89)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
B	1.35	1.83	0.053	0.072
C	3.75	4.25	0.148	0.167
D	2.29	2.60	0.090	0.102
E	2.95	3.05	0.116	0.120
a	0.35	0.48	0.014	0.019
b	0.40	0.56	0.016	0.022
L	0.80	1.20	0.031	0.047
G	0.35	0.44	0.014	0.017
H	1.40	1.60	0.055	0.063

● Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
c	0.80	1.00	0.032	0.04
d	1.30	1.50	0.052	0.060
e	0.70	0.90	0.028	0.036
J	1.80	2.00	0.072	0.080
K	1.40	1.60	0.056	0.064
X	2.50	2.70	0.100	0.108
X1	1.30	1.50	0.052	0.060
Y	4.30	4.50	0.172	0.180
Y1	3.10	3.30	0.124	0.132
θ	-	45°	-	45°