


PNP Silicon Epitaxial Planar Transistor

for switching, interface circuit and drive circuit applications

Features

- ◆With built-in bias resistors
- ◆Simplify circuit design
- ◆Reduce a quantity of parts and manufacturing process

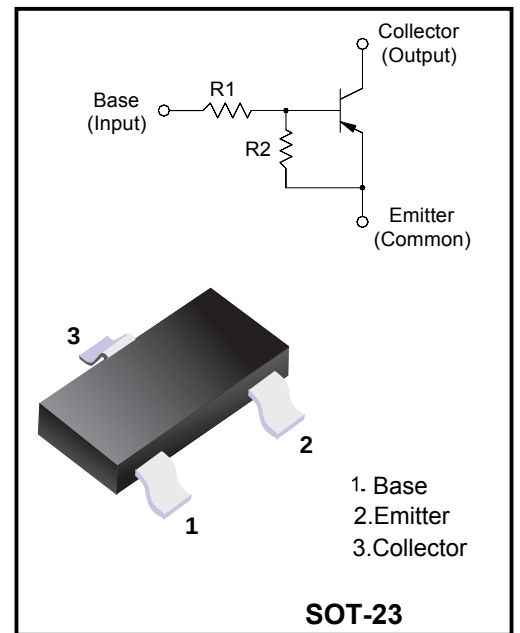

Resistor Values/Marking Code

Type	R1 (KΩ)	R2 (KΩ)	Marking
KRA107S	10	47	7BT
KRA108S	22	47	8BT
KRA109S	47	22	9BT

Absolute Maximum Ratings (Ta =25℃)

Parameter		Symbol	Value	Unit
Output Voltage		V_o	-50	V
Input Voltage	KRA107S	V_i	- 30, 6	V
	KRA108S		- 40, 7	
	KRA109S		- 40, 15	
Output Current		I_o	-100	mA
Total Power Dissipation		P_{tot}	200	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_s	- 55 to + 150	°C

Characteristics at Ta = 25°C

Parameter		Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $-V_O = 5\text{ V}$, $-I_O = 10\text{ mA}$	KRA107S KRA108S KRA109S	G_I	80 80 70	- - -	- - -	- - -
Output Cutoff Current at $-V_O = 50\text{ V}$		$I_{O(OFF)}$	-	-	-500	nA
Input Current at $-V_I = 5\text{ V}$	KRA107S KRA108S KRA109S	I_I	- - -	- - -	-0.88 -0.36 -0.16	mA
Output Voltage at $-I_O = 10\text{ mA}$, $-I_I = 0.5\text{ mA}$		$V_{O(ON)}$	-	-	-0.3	V
Input Voltage (ON) at $-V_O = 0.2\text{ V}$, $-I_O = 5\text{ mA}$	KRA107S KRA108S KRA109S	$V_{I(ON)}$	- - -	- - -	-1.8 -2.6 -5.8	V
Input Voltage (OFF) at $-V_O = 5\text{ V}$, $-I_O = 0.1\text{ mA}$	KRA107S KRA108S KRA109S	$V_{I(OFF)}$	-0.5 -0.6 -1.5	- - -	- - -	V
Transition Frequency at $-V_O = 10\text{ V}$, $-I_O = 5\text{ mA}$		$f_T^{1)}$	-	200	-	MHz

1) Characteristic of transistor only.

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-23	Tape/Reel, 7" reel	3000pcs/Reel	24000PCS/Box 120000PCS/Carton

Package Dimensions

SOT-23

Dim.	Millimeter (mm)		mil	
	Min.	Max.	Min.	Max.
A	0.9	1.15	35	45
A1	0.1		3.9	
bp	0.38	0.48	15	19
C	0.09	0.15	3.54	5.9
D	2.8	3.0	110	118
E	1.2	1.4	47	55
E	1.9		75	
E1	0.95		37	
HE	2.1	2.55	83	100
Lp	0.15	0.45	5.9	18
Q	0.45	0.55	18	22
v	0.2		7.9	
W	0.1		4	

The recommended mounting pad size



Disclaimer

The information presented in this document is for reference only. GuangDong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.