

4G 50x25 L100 CM1 Antenna

FEATURES & BENEFITS



- Welding RG 1.13 cable, Ipex connector, 3M sticker for easy installation.
- Mounting to: non-conductive surface
- Installation type: adhesive

APPLICATIONS

- IoT Devices
- Smart Cities
- Smart Agriculture
- Consumer Tracking
- Smart Metering
- Smart Agriculture



ORDER INFORMATION

Product Name	4G 50x25 L100 CM1 Antenna
Part Number	AIWF033
Dimensions	50 x 25mm
Weight	0.8 g
Color	Black
Mounting	adhesive
Antenna Cable	Default IPEX 1 RF 1.13 black coaxial cable (Ø 1.13 x 100 mm) , customizable.

REFERENCE GUIDE

Technical Features (MHz)	690-960	1710-2690
Max VSWR	6.8:1	3.0:1
Max Efficiency	69.6%	
Peak Gain	2.82dBi	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Input Impedance	50 Ω	
Operating Temperature	-40°C to +85°C	
Storage Temperature	-40°C to +85°C	
Relative Humidity	10 to 70%	
Material Substance Compliance	RoHS Compliant	
Dimensions (L x W x H)	45 x 25mm	
All test data were obtained from testing conducted on 1.4mm thick polycarbonate (PC) plastic material; with an 100-mm-long RF 1.13 cable.Application data might vary.		

MyAntenna RF Technology Co., Ltd

ADD:No.RM 410, Country Garden Phoenix Wisdom Valley, No. 50 Tiezai Road, Baoan District, Shenzhen, P.R.China.


TEL: +86-0755-86503881 FAX: +86-0755-27801677 E-mail: nfc@myantenna.com

ELECTRICAL PERFORMANCE


Note

All data displayed in the "ELECTRICAL PERFORMANCE" section were measured using a 100mm-long RF 1.13 cable mounted on 1.4mm thick polycarbonate (PC) plastic material.

Return Loss

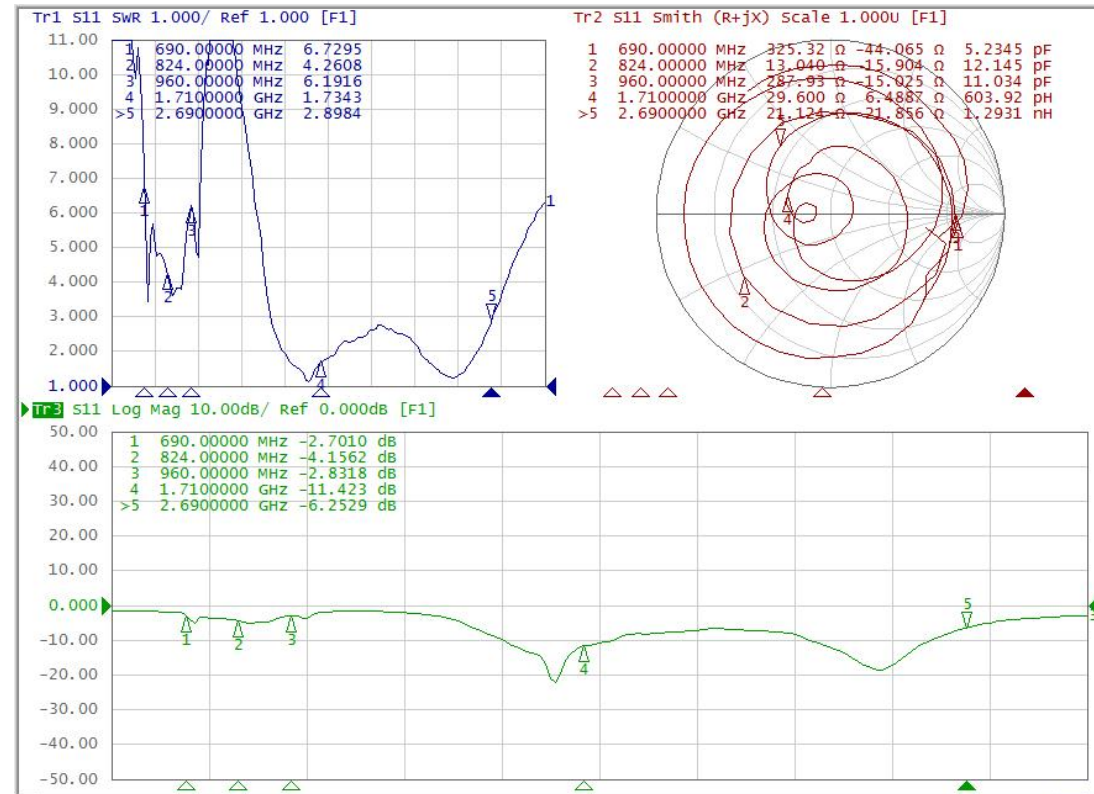



Efficiency (%) And Gain (dBi)

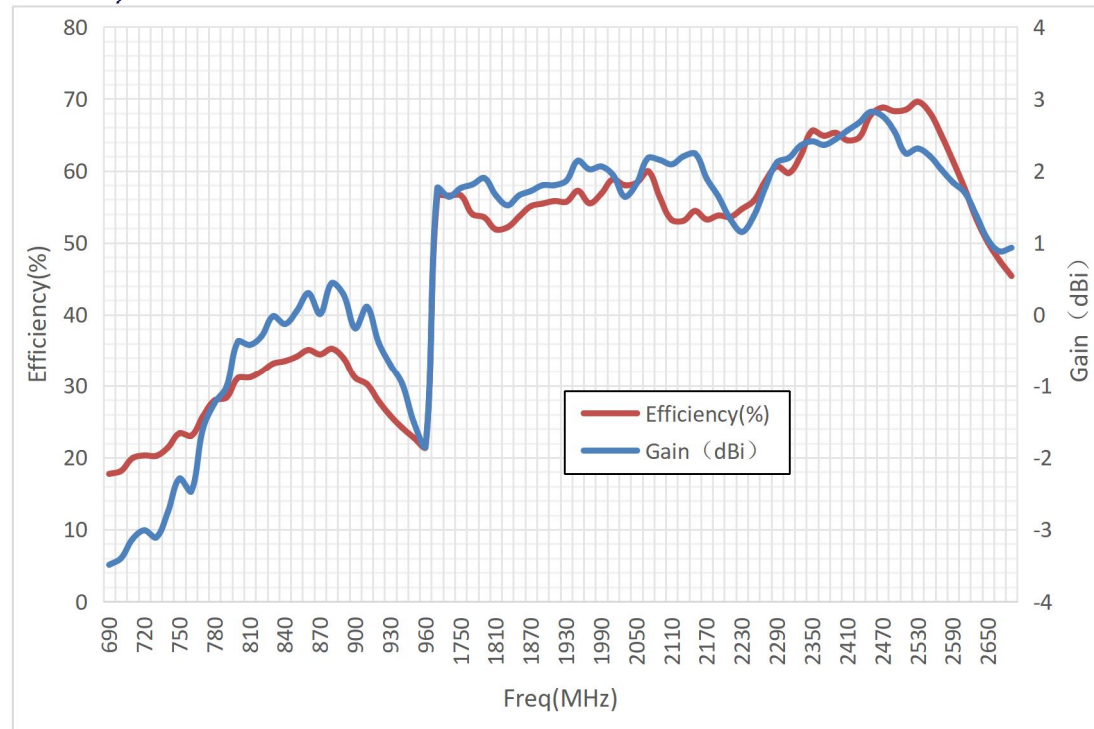

Freq(MHz)	Gain (dBi)	Efficiency(%)	Freq(MHz)	Gain (dBi)	Efficiency(%)	Freq(MHz)	Gain (dBi)	Efficiency(%)
690	-3.49	17.74	950	-1.51	22.76	2190	1.64	53.79
700	-3.4	18.14	960	-1.84	21.45	2210	1.33	53.59
710	-3.13	19.94	1710	1.76	56.48	2230	1.15	54.7
720	-3.01	20.31	1730	1.64	56.55	2250	1.37	55.82
730	-3.11	20.24	1750	1.76	56.59	2270	1.77	58.6
740	-2.76	21.38	1770	1.81	53.97	2290	2.12	60.61
750	-2.29	23.39	1790	1.9	53.54	2310	2.18	59.69
760	-2.47	23.03	1810	1.66	51.85	2330	2.35	62.06
770	-1.6	25.74	1830	1.52	52.16	2350	2.41	65.58
780	-1.24	27.97	1850	1.66	53.66	2370	2.36	64.87
790	-1.02	28.35	1870	1.72	55.09	2390	2.44	65.28
800	-0.37	31.11	1890	1.8	55.45	2410	2.56	64.23
810	-0.42	31.2	1910	1.8	55.8	2430	2.67	64.63
820	-0.3	32.04	1930	1.86	55.69	2450	2.82	67.78
830	-0.02	33.18	1950	2.14	57.22	2470	2.76	68.79
840	-0.13	33.54	1970	2.02	55.48	2490	2.55	68.29
850	0.05	34.16	1990	2.06	56.83	2510	2.24	68.51
860	0.3	35.09	2010	1.94	58.82	2530	2.31	69.6
870	0.01	34.48	2030	1.64	58	2550	2.21	68.15
880	0.44	35.26	2050	1.82	58.34	2570	2.02	65.01
890	0.28	33.94	2070	2.18	59.93	2590	1.84	61.4
900	-0.19	31.12	2090	2.15	56.28	2610	1.7	57.57
910	0.11	30.23	2110	2.09	53.17	2630	1.38	53.31
920	-0.39	27.85	2130	2.2	53.05	2650	1.04	50.01
930	-0.7	25.82	2150	2.24	54.42	2670	0.88	47.49
940	-0.97	24.16	2170	1.89	53.23	2690	0.93	45.38


RADIATION PATTERNS

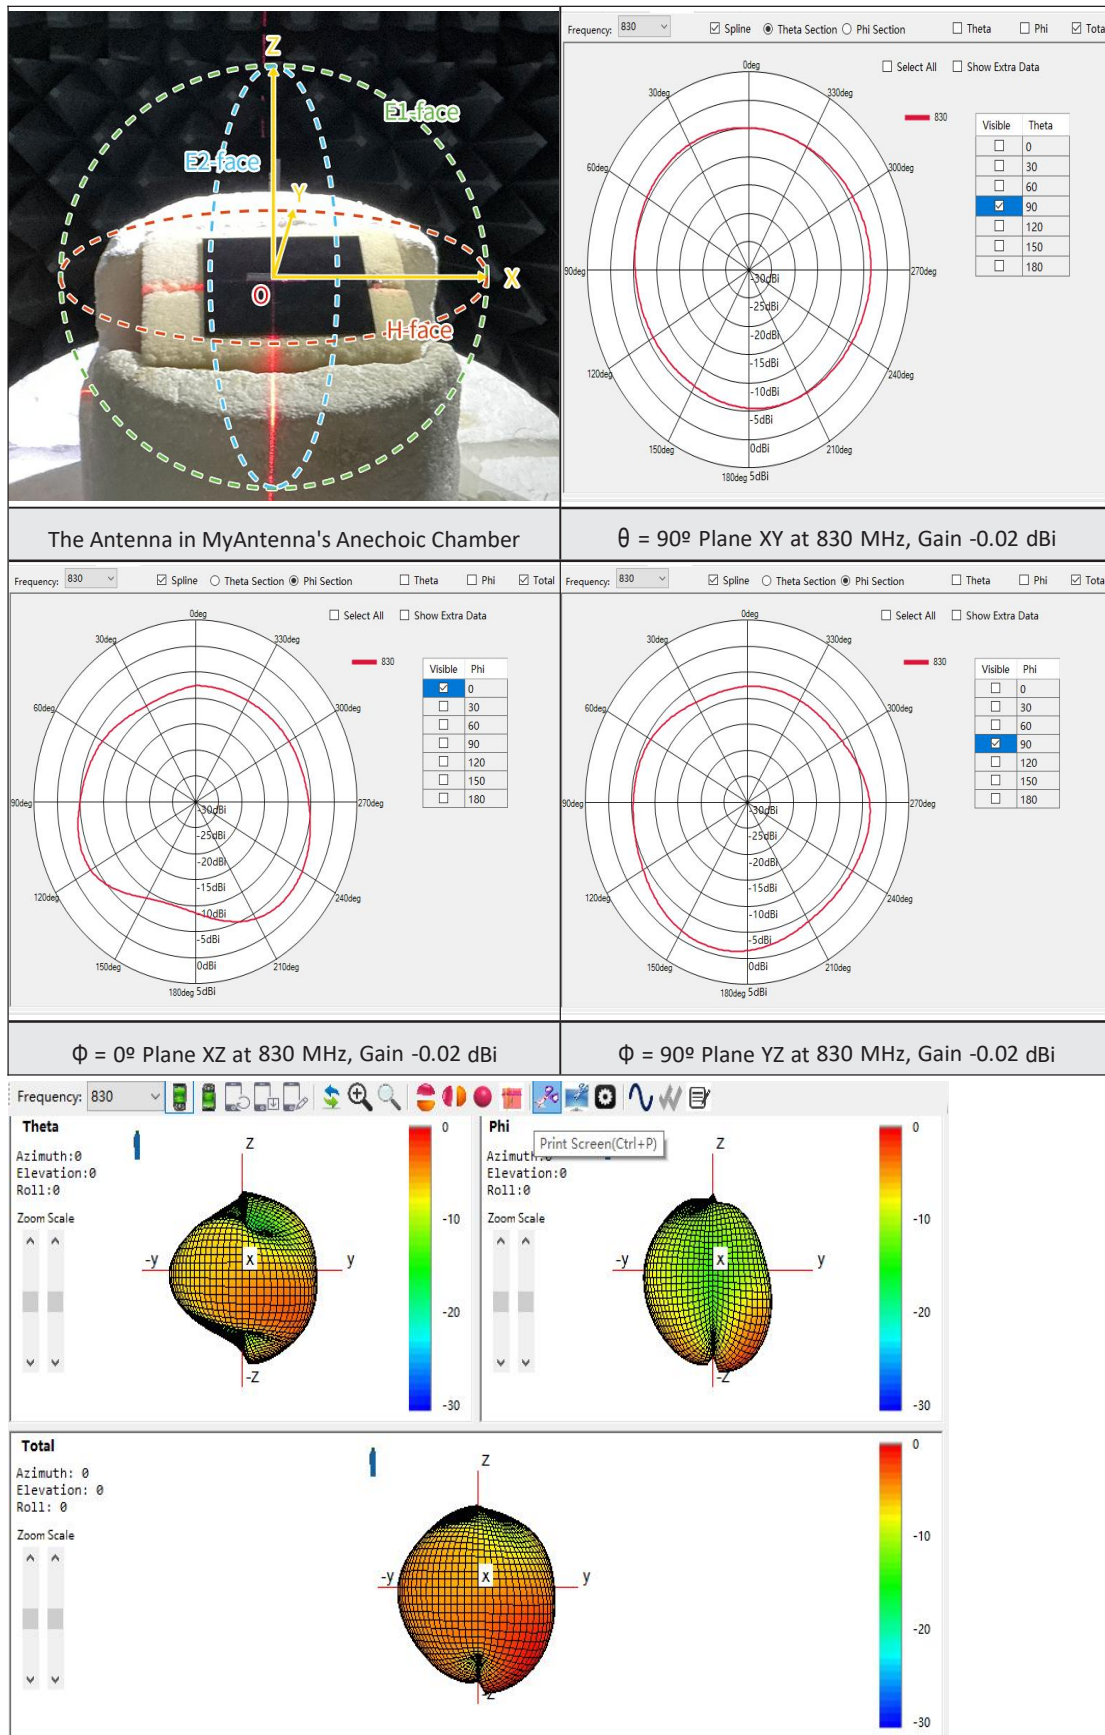

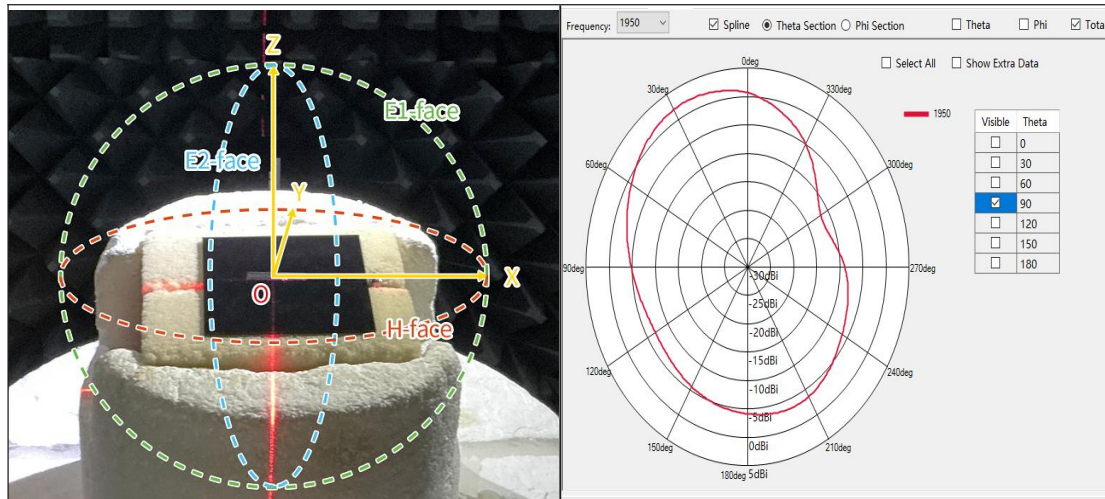


The Antenna in MyAntenna's Anechoic Chamber



$\theta = 90^\circ$ Plane XY at 1950 MHz, Gain 2.14 dBi

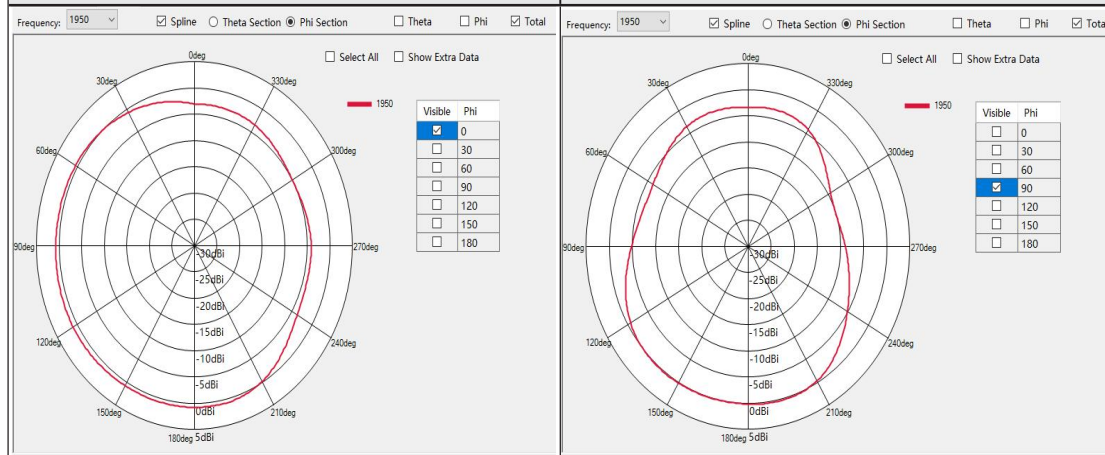

$\phi = 0^\circ$ Plane XZ at 1950 MHz, Gain 2.14 dBi

$\phi = 90^\circ$ Plane YZ at 1950 MHz, Gain 2.14 dBi

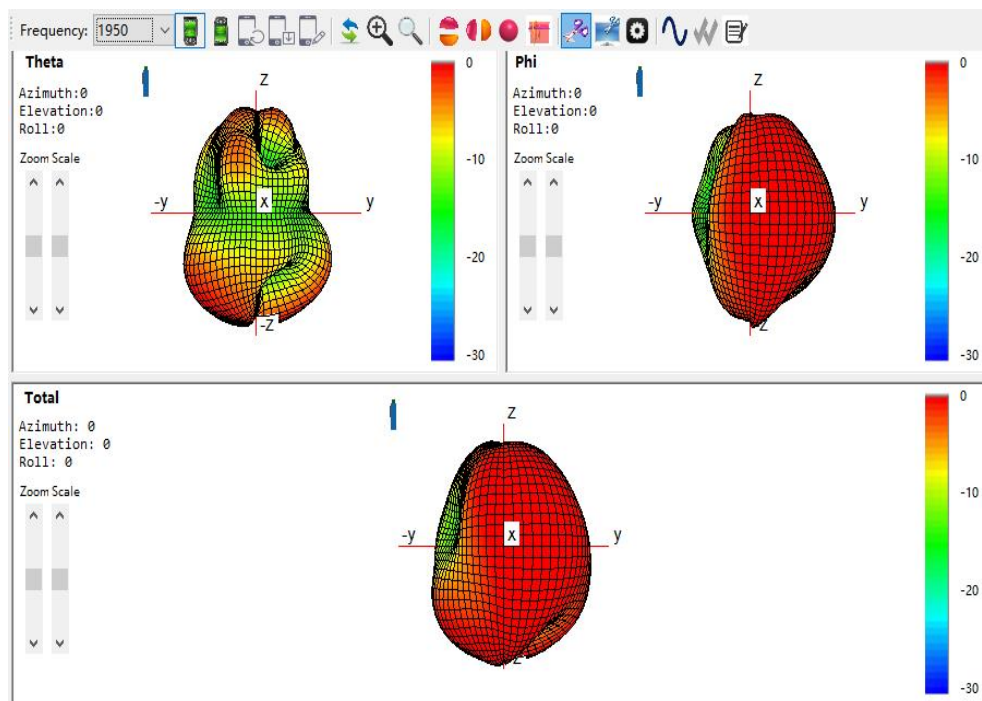

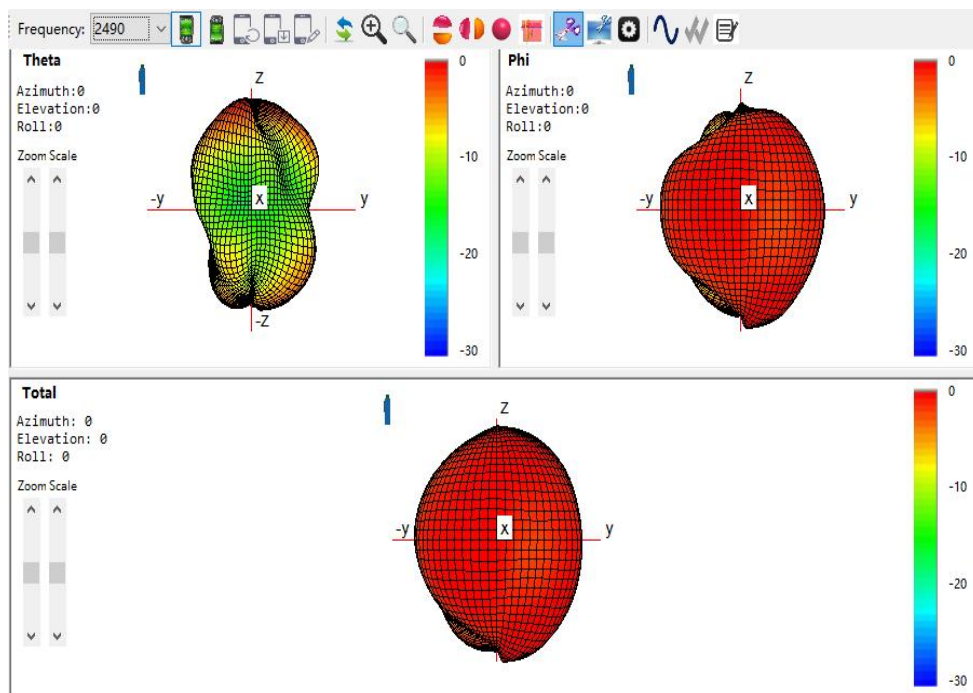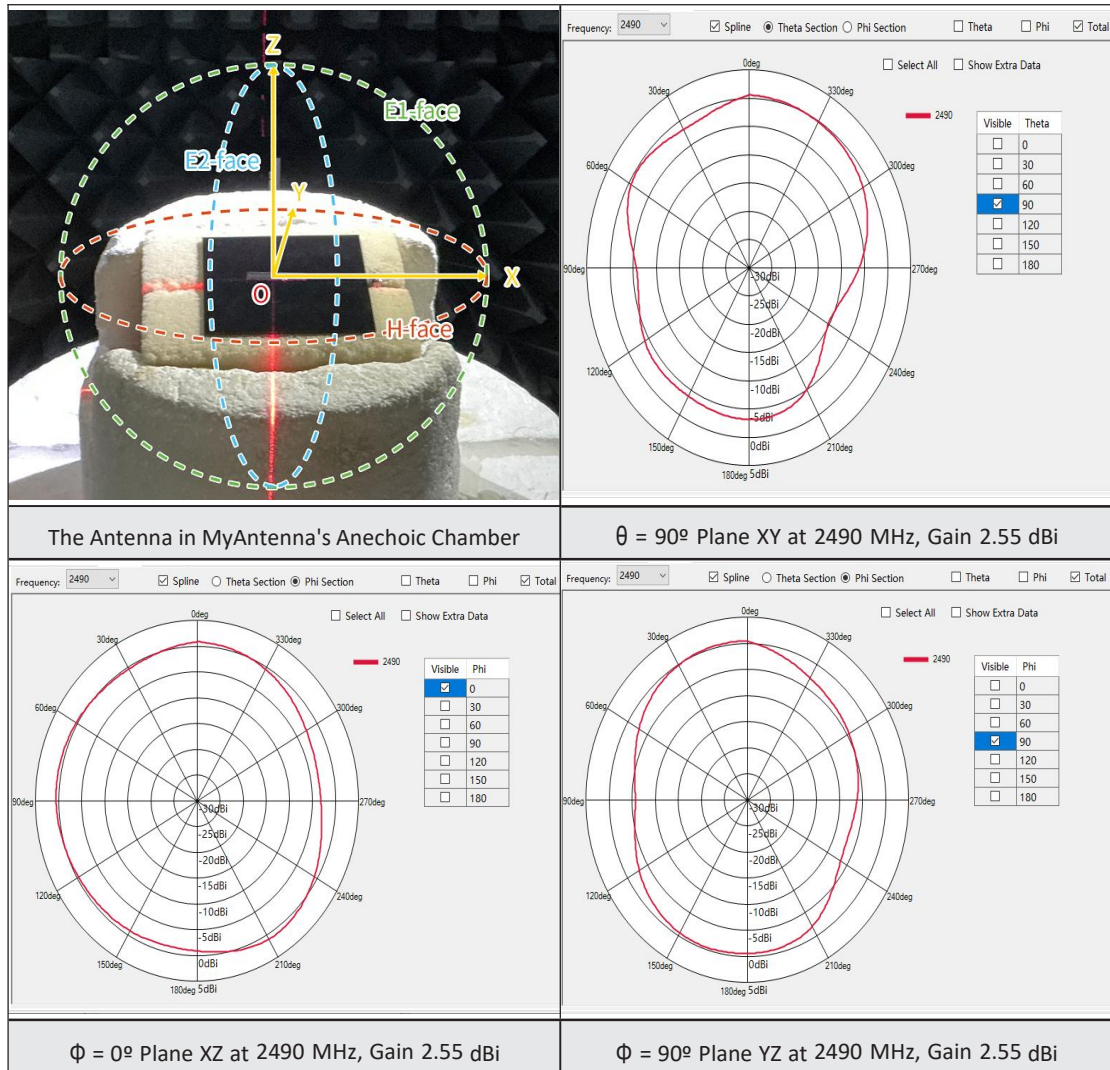

HOUSING CONFIGURATIONS

