


Dual General-Purpose Operational Amplifier

Features

- Internal Frequency Compensation
- Continuous Short-Circuit Protection
- Wide Common-Mode Voltage Ranges
- Wide Differential Voltage Ranges
- High DC voltage gain (about 100 dB)
- Unit gain bandwidth (about 3.5 MHz)
- Low Input Bias
- Low Input Offset Voltage and Current

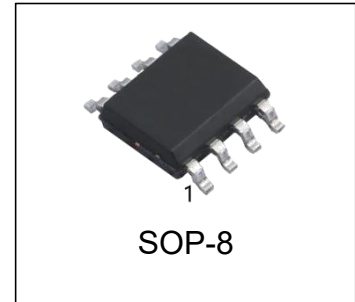

Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
HG4558LM/TR	SOP-8	4558L	REEL	4000pcs/reel

Description


The HG4558L device is a dual general-purpose operational amplifier.

The high common-mode input voltage range and the absence of latch-up make this amplifier ideal for voltage-follower applications. The device is short-circuit protected, and the internal frequency compensation ensures stability without external components.


Applications

- Active filter
- Compensation amplifier
- Audio preamplifier
- Electronic instrumentation

Schematic(Eachamplifier)

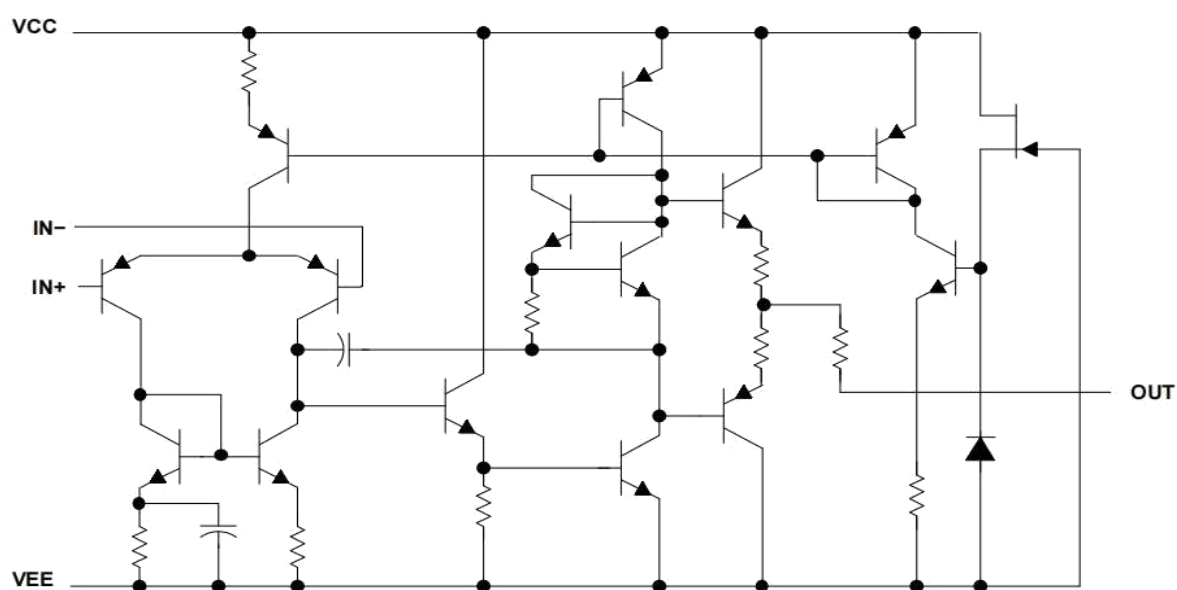

Pin Configuration

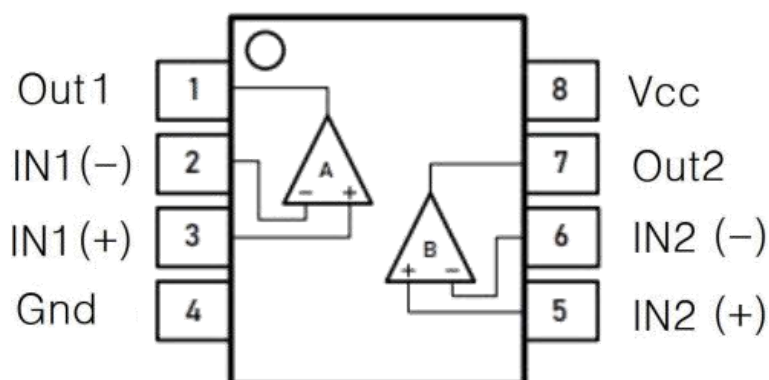

SOP-8

Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

PARAMETER	MIN	MAX	UNIT
Total Supply Voltage		±22	V
Differential Input Voltage		±20	V
Maximum Junction Temperature	-40	+150	°C
Operating Temperature Range	-20	+85	°C
Storage Temperature Range	-65	+150	°C
Lead Temperature (Soldering, 10 seconds)	-	+260	°C

Note: Stress greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended Operating Conditions





PARAMETER		MIN	NOM	MAX	UNIT
Supply Voltage, $V_s = (V_+) - (V_-)$	Signal-supply	5		36	V
	Dual-supply	±2.5		±18	V
Operating Temperature Range		-20		+85	°C





Electrical Characteristics





(VCC = +15 V, VEE = -15 V, TA = 25°C, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	HG4558L			
			MIN	TYP	MAX	UNIT
Power supply current	I _{CC}	R _L =∞	-	3	5.5	mA
Input offset voltage	V _{IO}	R _S <10kΩ	-	±2	±5	mV
Input offset current	I _{IO}	V _{cm} =0V	-	±30	±200	nA
Input bias current	I _{BIAS}	V _{cm} =0V	-	±50	±250	nA
Input Common Mode Voltage	V _{ICM}		-	12	13	V
Output Voltage Swing	V _{OM}	R _L =10k	12	14	-	V
		R _L =2k	10	13	-	V
Output short-circuit current	I _{SC}	V _O = 0V	±40	±60	±80	mA
Large Signal Voltage Gain	G _v	V _o (p-p) =±10V,R _L <2kΩ	80	100	-	dB
Common Mode Rejection Ratio	CMRR	R _S <10kΩ	70	90	-	dB
Power supply Rejection Ratio	PSRR	R _S <10kΩ	65	90	-	dB
Gain-Bandwidth Product	GBWP		-	3.5	-	MHz
Slew Rate	SR		-	1.7	-	V/us

Typical Characteristics

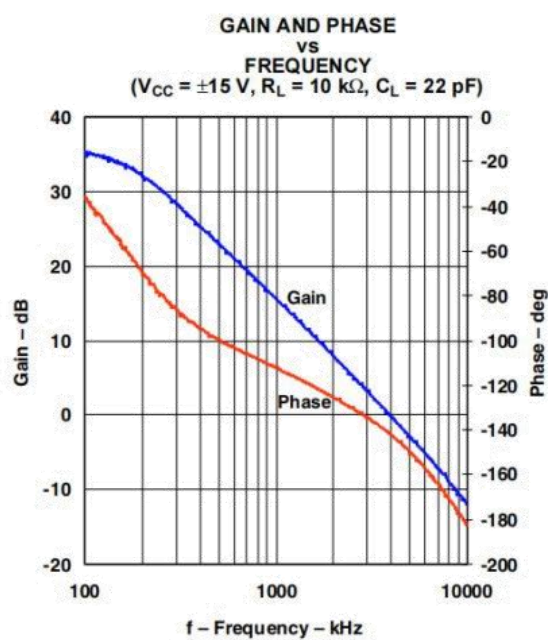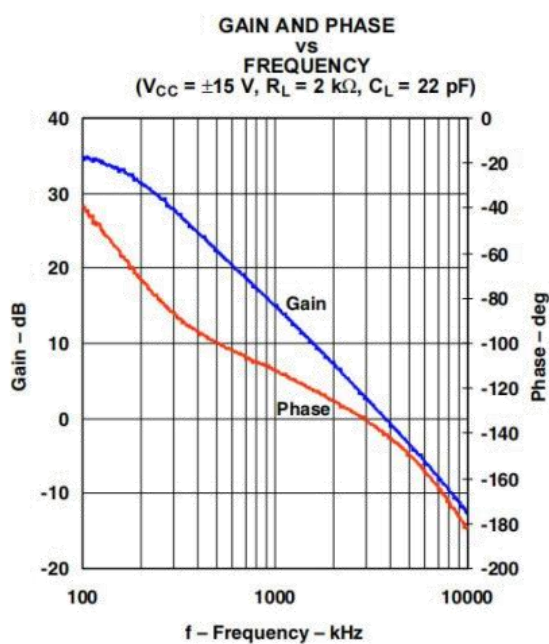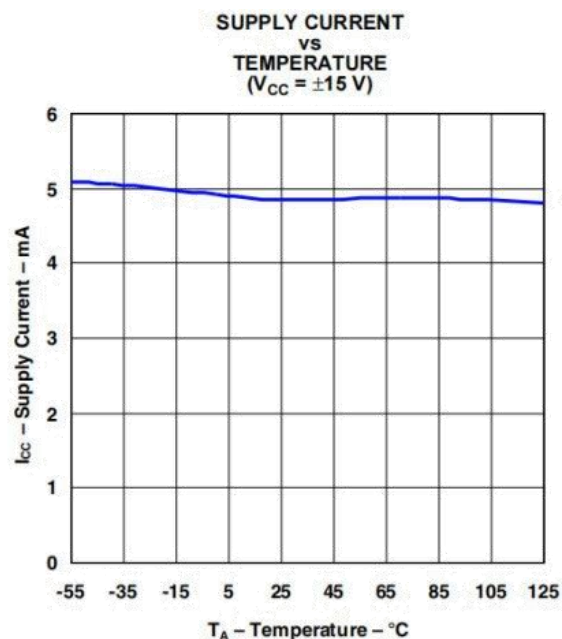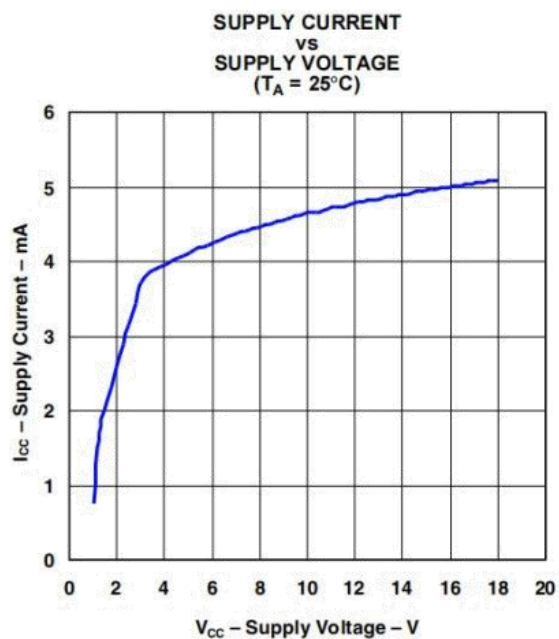


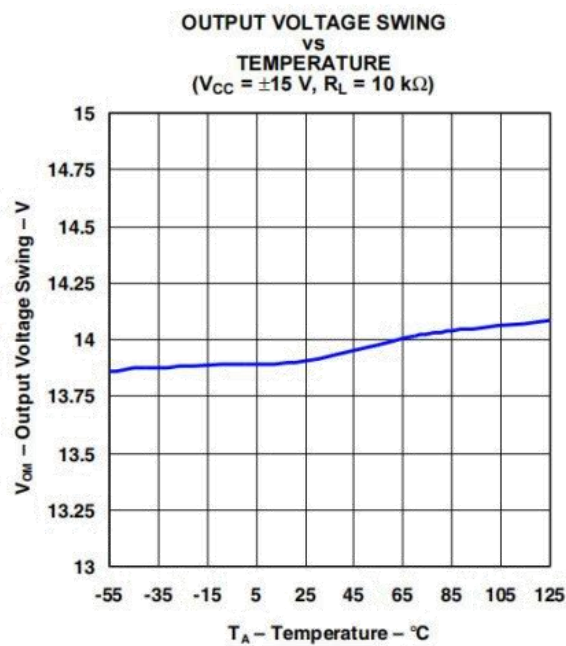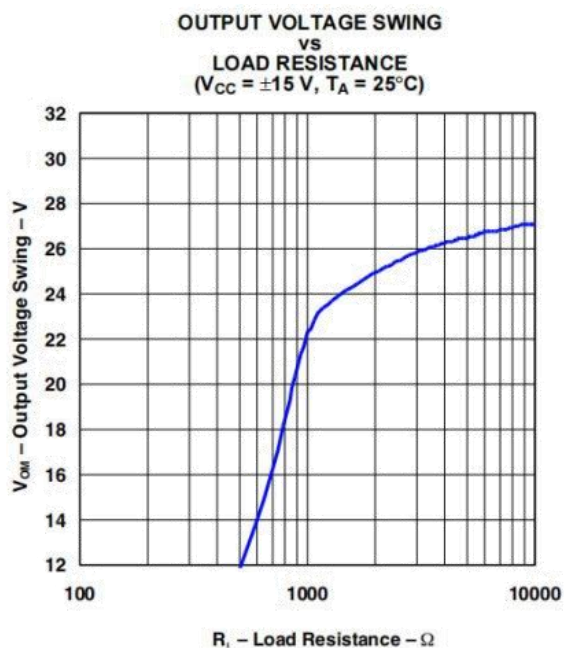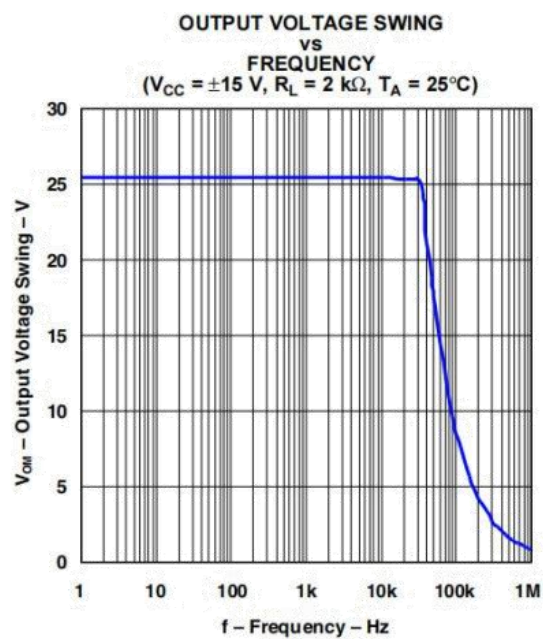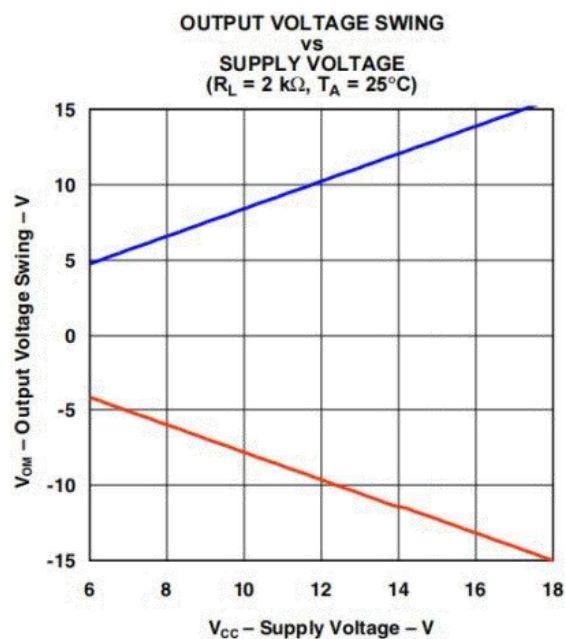

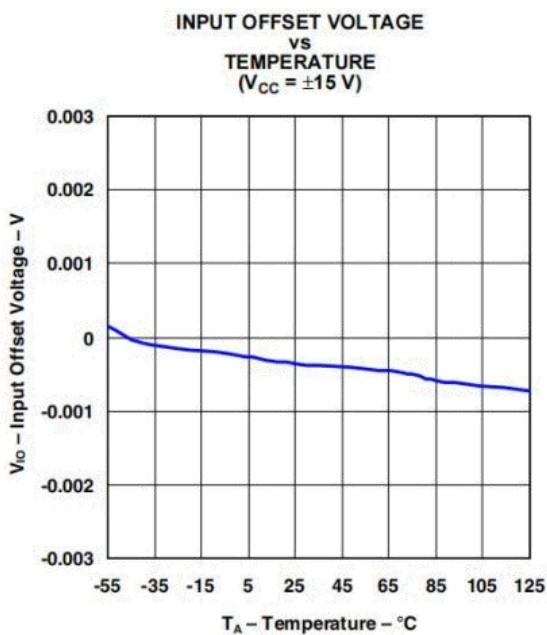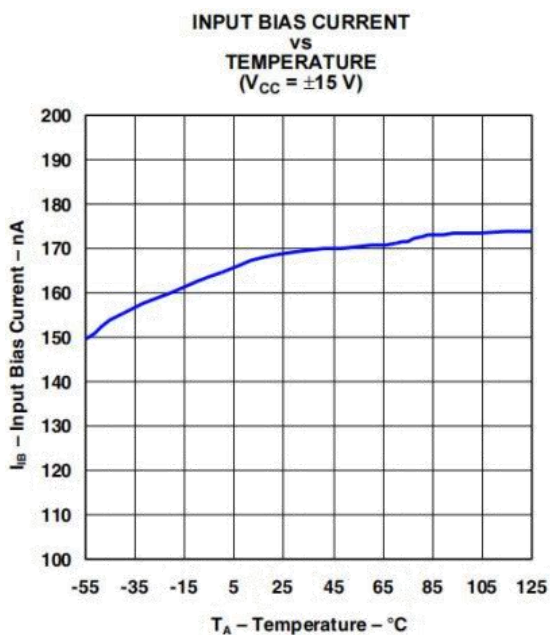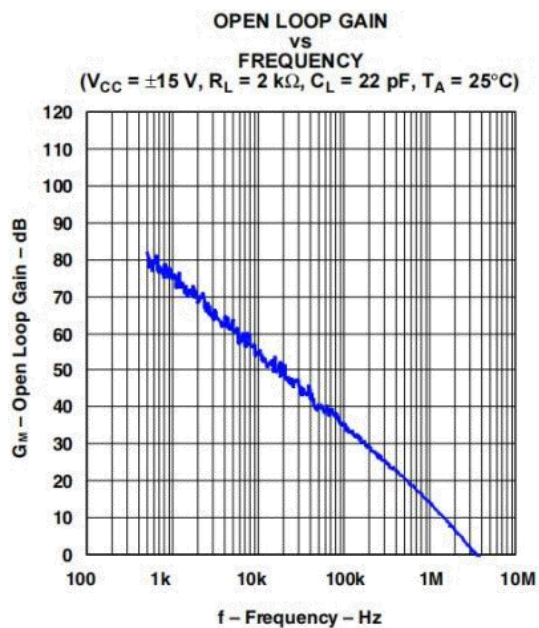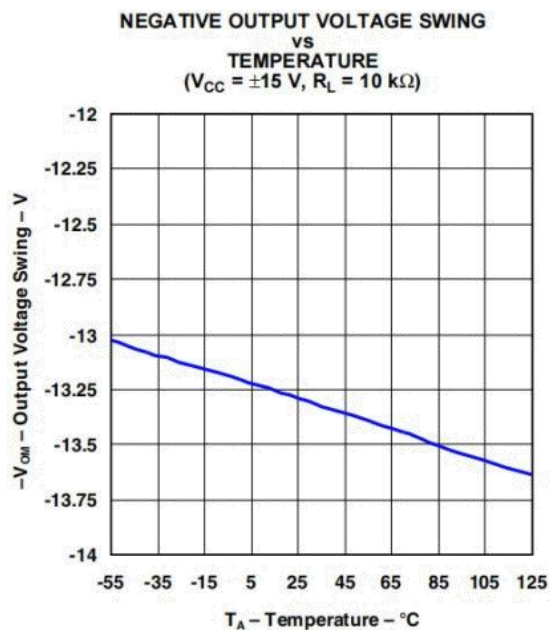

Physical Dimensions

SOP-8

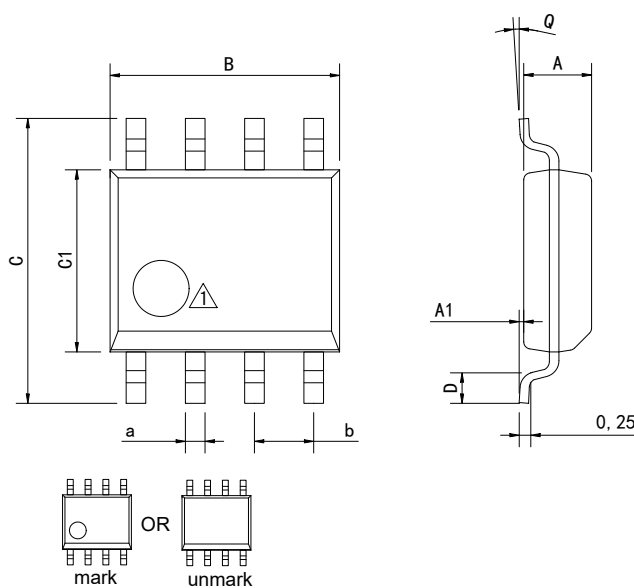

Dimensions In Millimeters(SOP-8)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	

C

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2019-4	New	1-10
V1.1	2025-8	Document Reformatting	1-10
V1.2	2026-4	Update important statements	10

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.