



BAT54T-AT-CT-ST


SCHOTTKY DIODES

FEATURES


Extremely Fast Switching Speed




BAT54T MARKING: L1



BAT54AT MARKING: L2



BAT54CT MARKING: L3



BAT54ST MARKING: L4

Maximum Ratings @T_A=25°C


Parameter	Symbol	Limits	Unit
Peak Repetitive Peak reverse voltage	V _{RRM}	30	V
Working Peak Reverse Voltage	V _{RWM}		
	V _R		
Forward Continuous Current	I _{FM}	200	mA
Power Dissipation	P _D	150	mW
Storage temperature	T _{STG}	-55-150	°C

Electrical Characteristics @T_A=25°C


Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse Breakdown Voltage	V _{(BR)R}	30			V	I _R =100μA
Forward voltage	V _{F1}			0.24	V	I _F =0.1mA
	V _{F2}			0.32	V	I _F =1mA
	V _{F3}			0.40	V	I _F =10mA
	V _{F4}			0.50	V	I _F =30mA
	V _{F5}			1	V	I _F =100mA
Reverse current	I _R			2	μA	V _R =25V
Diode Capacitance	C _D			15	pF	V _R =1V, f=1MHz
Reverse Recovery Time	t _{rr}			5	nS	I _F =I _R =10mA I _{rr} =0.1X I _R , R _L =100Ω

Typical Characteristics


Forward Characteristics

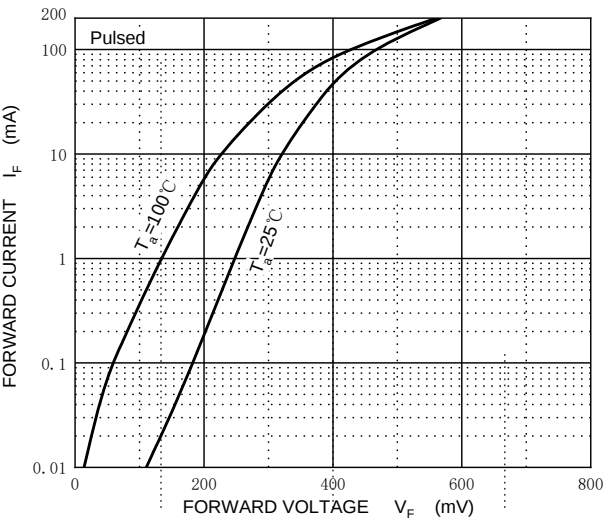

Reverse Characteristics

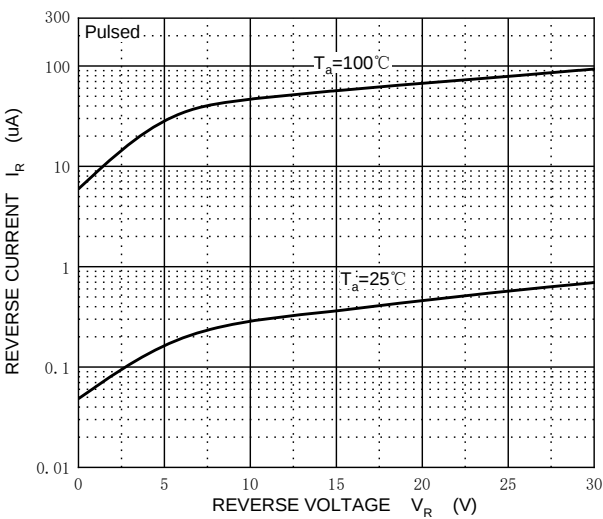

Capacitance Characteristics

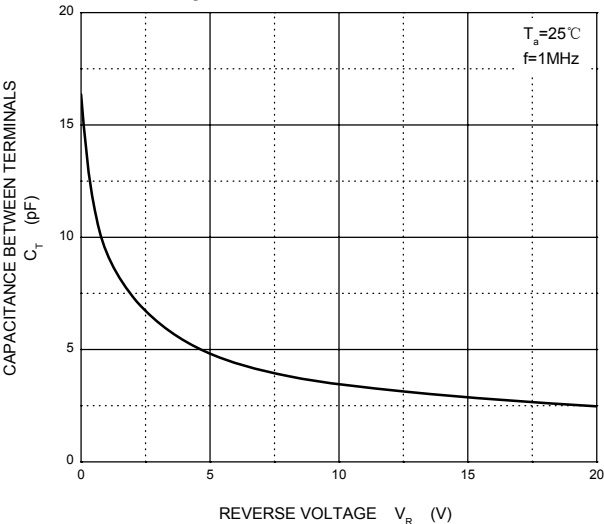

Power Derating Curve

